




The Catalogue




It's in our DNA.

Content

Screwdrivers

Kraftform Stainless Steel		18
Kraftform Plus - Series 900		24
Kraftform Plus - Series 300		30
Kraftform Series Comfort		48
Wooden Handle Series		54
Flagdriver Series		57
Screwdriving Accessories		58
Kraftform Micro Series		60
400 T-Handle Series		68
Kraftform Stainless VDE		74
Kraftform 100 VDE		78
Kraftform Kompakt VDE		92
Kraftform Comfort VDE		104
ESD Tools		108

Ratchets

1/4" Zyklop Speed		130
1/4" Zyklop Metal Push		136
1/4" Zyklop Metal Switch		138
1/4" Zyklop Accessories		140
3/8" Zyklop Speed		146
3/8" Zyklop Metal Push		150
3/8" Zyklop Metal Switch		152
3/8" Zyklop Accessories		154
1/2" Zyklop Speed		160
1/2" Zyklop Hybrid		164
1/2" Zyklop Metal Push		166
1/2" Zyklop Metal Switch		168
1/2" Zyklop Accessories		170
1/2" Koloss		176
Zyklop Mini 1 & 2		180


Joker Combination Ratchet Wrenches

Joker Ratcheting Combination Wrenches		192
Joker Switch Ratcheting Combination Wrenches		194

L-Keys

L-Keys for Hexagon Socket Screws		202
L-Keys for TORX® and TORX PLUS® Screws		212
Offset Screwdrivers		216


Kraftform Kompakt

Kraftform Kompakt 10, 12		222
Kraftform Kompakt 20, 22, 25, 26, 28		224
Kraftform Kompakt 40, 41		228
Kraftform Kompakt 50		229
Kraftform Kompakt 60, 62		230
Kraftform Kompakt 70, 71		236
Kraftform Kompakt 100		237
Kraftform Kompakt User-Specific Sets		238
Bitholding Screwdrivers And Adaptors		242
Kraftform Kompakt Vario With Ratchet Function		246
Kraftform Kompakt Vario Without Ratchet Function		250

Products for Power Tool Use

Bits	
Bits For Phillips Screws	 266
Bits For Pozidriv Screws	 288
Bits For Plusminus Screws – Slotted/Phillips	 300
Bits For Plusminus Screws – Slotted/Pozidriv	 301
Bits For TORX® Screws	 302
Bits For TORX® BO Screws	 316
Bits For TORX PLUS® Screws	 318
Bits For TORX PLUS® IPR Screws	 322
Bits For ASSY® Screws	 323
Bits For Slotted Screws Guide Sleeves	 324
Bits For Hexagon Socket Screws	 328
Bits For Hexagon Socket BO Screws	 335
Bits For Square Socket Screws	 336
Bits For TORQ-SET® Screws	 340
Bits For TRI-WING® Screws	 343
Bits For Multi-Point Screws	 344
Bits For Hi-TORQUE Screws	 345
Bits For Microstix Screws	 346
Bits For Five Lobe Screws	 347
Bits For Five Lobe Screws With Safety Pin	 348
Bits For Spanner Screws	 350
Nutsetters	 351
Internal Thread Insertion Tool	353

Holder and Adaptors

Impaktor Bit Holders	 358
Rapidaptor Bit Holders	 362
BiTorsion Bit Holders Quick-Release Chuck	 368
Universal Bit Holders With Quick-Release Chuck	 369
Universal Bit Holders With Retaining Ring	 371
Universal Bit Holders With Stainless Steel Sleeve	 372
Universal Bit Holders With Copper Beryllium Sleeve	 374
Bit Holders With adjustable Depth-Control Stop	 375
Adaptors	 376

Bit Sets

Bit-Checks Impaktor	 384
Bit-Checks Stainless	 388
Bit-Checks / Bit-Safes BiTorsion	 390
Bit-Checks Diamond	 394
Bit-Checks / Bit-Safes Universal	 398
Bit-Checks Wood	 408
Bit-Checks Metal	 410
Bit Sets For Special Applications	 411


Torque Tools

Series 7400 Adjustable	 420
Series 7400 Pre-Set	 428
Series Torque-indicators	 434
Series 7100	 438
Series 7000	 440
Series Insert Tools	 444
Impact Driver and Soft-faced Hammers	
Impact Driver 90 Nm	 448
Soft Faced Hammers	 450

TechLex


Technical Compendium	454
Code No. Index	474
Article No. Index	488
Alphabetical Index	498

Tool Index

Tool	Tip type	Stainless	Series 900	Series 300	Series Comfort	Wooden Series	Micro Series	400 T-Handle Series	VDE	ESD	Ratchets	L-Keys	Kraftform kompakt	Impact Drivers	Joker
															
Phillips		20	26	34, 42	50	56	62		76, 81, 98, 106	110	130ff	216	222ff	449	
Pozidriv		20	27	35, 42	50	56	62		76, 82, 99, 106	110	130ff	216	222ff		
PlusMinus Phillips									83, 100						
PlusMinus Pozidriv									84, 100						
TORX® TORX®BO	 	21	27	36	51		62	70	85	110	130ff	212-215	222ff	449	
TORX® ZA															
TORX PLUS®												214			
TORX PLUS® IPR															
ASSY®															
Slotted		20	26	32, 42	50	56	62		76, 80, 98, 106	110	132ff	216	222ff	449	
Hexagon Socket				36			64	70	85, 101		130ff	202-211	230ff	449	
Hexagon Socket BO															
Square Socket		21		39					86, 101				225, 232f		
TORQ-SET®				38									233		
TRI - WING®				40									233		
Multi-Point															
HTN															
Microstix										112					
Five Lobe	 						64								
Spanner													233f		
External Hex				40			65	71	86	112, 115	130ff				192-196, 238, 240

Your guide to getting The Best Tools for the Job.

													Tool
													Tip type
266-275	282	276-281		285	283	283	284	284	285	286	282	286	 Phillips
288-293	298	294-297			298	298	298						 Pozidriv
		300											 PlusMinus Phillips
		301											 PlusMinus Pozidriv
302-307, 316	311	308-310, 317		314	312	312	313	313	314	315			  TORX® TORX® B0
307													 TORX® ZA
318		319		320					320	321			 TORX PLUS®
322		322											 TORX PLUS® IPR
323													 ASSY®
324-325	327	326		327									 Slotted
328-329	333	330-332		334									 Hexagon Socket
335		335											 Hexagon Socket B0
336-337		338-339											 Square Socket
340	342	341	342										 TORQ - SET®
343		343											 TRI - WING®
344		344											 Multi-Point
345													 HTN
				346					346				 Microstix
348		349		347									  Five Lobe
350		350											 Spanner
		351-352											 External Hex

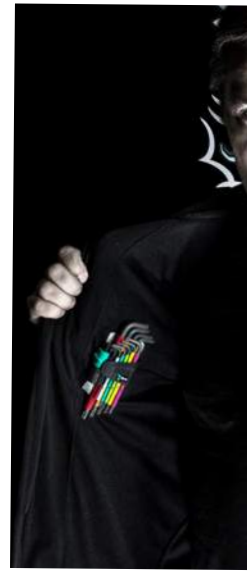



What we believe in ...

We believe in challenging the standard

We believe in thinking in a rebellious way

We believe in Rock'n'Roll

We love to be Tool Rebels

The way we challenge the standard is ...

by making the experience for our users ...

easier, safer and full of joy.

We simply create great tools for rebels.

Do you want to

BE A TOOL REBEL?



Wera Werk

750 passionate staff and a considerable degree of vertical manufacturing integration ensure an unmatched level of tool know-how.





Wera Werk Bystrice (CZ)

Great Tools for Rebels – It's in our DNA.



The Chiseldriver

More than just screwdriving.



Kraftform Micro

Precision engineering made easy.

Kraftform

Ergonomics you can grasp.



Lasertip


No more slips when
screwdriving.



Joker

With an amazing holding
function.



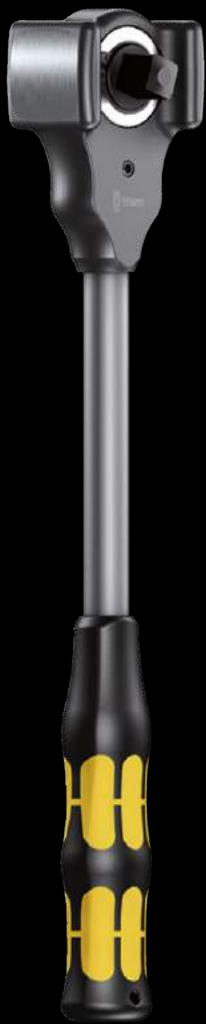

Koloss

Ratchet and hammer.



Zyklon Speed

A really fast mover.



Zyklon Mini

Whenever space is tight.

BitTorsion

Bits and holder live longer.



Kraftform Kompakt

Big content, small size.

Great Tools for Rebels – It's in our DNA.



Bit-Check

Everything at a glance.
Always to hand.

Tools in textile boxes

Small size and low weight for
simpler mobility.



Kraftform Kompakt 20

Getting a handle on things.



Diamond- coated Bits

Bits with a bite.





Tools with holding function

Secure holding of TORX® screws.



Hex-Plus

Allows hexagon socket screws a longer service life.



Rapidaptor

More rapid bit change.

Stainless tools

Attractive and hard.

Impaktor Bits

For extreme situations.



"Take it easy" Toolfinder

Rapid access to the tool thanks to colour coding.



We love design

Wera has received several awards for the design of its products and packaging. Including: Red Dot Award, iF Gold Award and German Design Award.



” Our DNA “

We love Rock'n'Roll





Wera
1000 V
C
162 i
PH 2x100
006184

Wera
335
10x5-5x125
110007

Wera



Screwdrivers

	Kraftform Stainless Steel	16
	Kraftform Plus - Series 900	24
	Kraftform Plus - Series 300	30
	Kraftform Series Comfort	48
	Wooden Handle Series	54
	Flagdriver Series	57
	Screwdriving Accessories	58
	Kraftform Micro Series	60
	400 T-Handle Series	68
	Kraftform Stainless VDE	74
	Kraftform Series 100 VDE	78
	Kraftform Kompakt VDE	92
	Kraftform Comfort VDE	104
	ESD Tools	108

Kraftform Stainless Screwdrivers

Why are stainless elements so often affected by rust?

One reason: screwdriving jobs are often carried out with a tool made of conventional steel which can result in extraneous rust forming. This is annoying. We were confident that this could be prevented by using tools likewise out of stainless steel and meeting the required standard of industrial hardness.

A tool series out of stainless steel. The forming of extraneous rust is prevented and a special vacuum ice-hardening process ensures the required degree of hardness.



Solution to the rust problem: screw stainless steel together with stainless steel! Wera stainless steel tools are manufactured out of stainless steel so unsightly rust can be avoided.



The stainless steel tools from Wera are vacuum ice-hardened and have the hardness and strength needed for screw connections. There are no limitations to the industrial applications they are suitable for.



A precisely-focused laser creates a sharp-edged surface structure. This laser treatment results in an edge hardness of up to 1000 HV 0.3. Wera Lasertip "bites" itself into the screw head and prevents any slips out of the recess. It is available for screwdrivers for slotted, Phillips and Pozidriv screws.



Wera Lasertip reduces the contact pressure required and enhances force transfer – meaning less screwdriving effort is required. Screwdriving becomes safer and easier.



The outstanding design of the Kraftform handle that fits perfectly into the hand prevents hand injuries such as blisters and calluses.



The hard materials used for the handle ensure rapid hand repositioning without any danger of the skin “sticking” to the handle. The surrounding hard zones with large diameters glide like wheels across the hand.



The screw symbol and tip size identification markings on the handle make it easier to find the right screwdriver in the tool case or at the workplace.



The hexagonal non-roll feature prevents any rolling away at the workplace.

Series Kraftform Screwdrivers

Stainless Steel

3335 Screwdriver for slotted screws, stainless



Application: Slotted screws

Blade: Round

Design: Stainless steel for minimising rust, Lasertip

Handle: Kraftform with non-roll feature, multi-component

	mm	mm	mm	mm	mm		
05032001001 ¹⁾	0,5	3,0	3,0	80	81	1/8"	3 1/8"
05032002001	0,6	3,5	3,5	100	81	9/64"	4"
05032003001	0,8	4,0	4,0	100	98	5/32"	4"
05032004001	1,0	5,5	5,5	125	98	7/32"	5"

¹⁾ without Lasertip

3350 PH Screwdriver for Phillips screws, stainless



Application: Phillips screws

Blade: Round

Design: Stainless steel for minimising rust, Lasertip

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	mm	mm	
05032020001 ¹⁾	PH 0	60	81	3,0	2 3/8"	
05032021001	PH 1	80	98	4,5	3 1/8"	
05032022001	PH 2	100	105	6,0	4"	
05032023001	PH 3	150	112	8,0	6"	

¹⁾ without Lasertip

3334 Screwdriver for slotted screws, stainless



Application: Slotted screws

Blade: Round

Design: Lasertip, stainless steel for minimising rust,

Handle: Kraftform with non-roll feature, multi-component

	mm	mm	mm	mm	mm		
05032005001	1,2	6,5	6,0	150	105	1/4"	6"
05032006001	1,2	8,0	7,0	175	112	5/16"	7"
05032007001	1,6	10,0	9,0	200	112	3/8"	8"

3355 PZ Screwdriver for Pozidriv screws, stainless



Application: Suitable for Pozidriv screws

Blade: Round

Design: Stainless steel for minimising rust, Lasertip

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	mm	mm	
05032030001 ¹⁾	PZ 0	60	81	3,0	2 3/8"	
05032031001	PZ 1	80	98	4,5	3 1/8"	
05032032001	PZ 2	100	105	6,0	4"	
05032033001	PZ 3	150	112	8,0	6"	

¹⁾ without Lasertip



3367 Screwdriver for TORX® screws, stainless



Application: TORX® socket screws

Blade: Round

Design: Stainless steel for minimising rust

Handle: Kraftform with non-roll feature, multi-component

		 mm	 mm	 mm	 "
05032050001	TX 8	60	81	3,5	2 ³ / ₈ "
05032051001	TX 9	60	81	4,0	2 ³ / ₈ "
05032052001	TX 10	80	81	4,0	3 ¹ / ₈ "
05032053001	TX 15	80	98	4,0	3 ¹ / ₈ "
05032054001	TX 20	100	98	4,5	4" "
05032055001	TX 25	100	105	5,0	4" "
05032056001	TX 27	115	105	5,5	4 ⁹ / ₁₆ "
05032057001	TX 30	115	105	6,0	4 ⁹ / ₁₆ "
05032058001	TX 40	130	112	7,0	5 ³ / ₁₆ "

3368 Screwdriver for square socket screws, stainless



Application: Square socket screws

Blade: Round

Design: Stainless steel for minimising rust

Handle: Kraftform with non-roll feature, multi-component

		 mm	 mm	 mm	 "
05032070002	# 1	80	98	4,5	3 ¹ / ₈ "
05032071002	# 2	100	105	6,0	4" "

Series Kraftform Screwdrivers

Stainless Steel

3334/6 Screwdriver set, stainless and rack




Application: Slotted and Phillips screws
Content: 6-piece set and rack in display carton

			
05032060001			
	3350 PH	1 x PH 1x80; 1 x PH 2x100	
	3335	1 x 0,5x3,0x80 ¹⁾ ; 1 x 0,8x4,0x100; 1 x 1,0x5,5x125	
	3334	1 x 1,2x6,5x150	

¹⁾ without Lasertip

3334/3355/6 Screwdriver set, stainless and rack

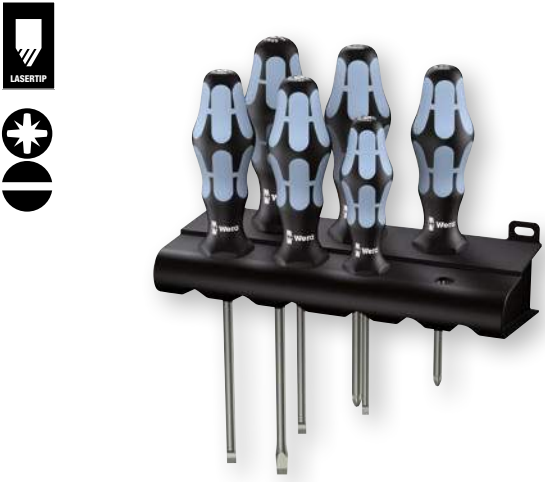

Application: Slotted and Pozidriv screws
Content: 6-piece set and rack in display carton

			
05032061001			
	3355 PZ	1 x PZ 1x80; 1 x PZ 2x100	
	3335	1 x 0,5x3,0x80 ¹⁾ ; 1 x 0,8x4,0x100; 1 x 1,0x5,5x125	
	3334	1 x 1,2x6,5x150	

¹⁾ without Lasertip



3334/3350/3355/6 Screwdriver set, stainless and rack



Application: Slotted, Phillips and Pozidriv screws
Content: 6-piece set and rack in display carton

05032063001	
	3350 PH 1 x PH 1x80; 1 x PH 2x100
	3355 PZ 1 x PZ 1x80; 1 x PZ 2x100
	3335 1 x 0,5x3,0x80 ¹⁾
	3334 1 x 1,2x6,5x150

¹⁾ without Lasertip



Series 900 – the Chiseldriver

Screwdrivers are often misused as chisels. This can be dangerous.

The chiseldriver is the solution when not only screwdriving is required. For fastening, chiselling and loosening seized screws.

Wera chiseldriver: the screwdriver whenever the going gets tough!



An integrated impact cap lengthens the service life and reduces the danger of splintering. Nevertheless, always wear protective goggles.



Greater torque can be transferred by fitting an open-jaw or ring spanner over the integrated hex bolster.




The hard materials used for the handle ensure rapid hand repositioning without any danger of the skin “sticking” to the handle. The softer “anti-slip” zones provide increased grip, enabling the low-loss transfer of high forces.



A hexagon blade made out of high-quality bit material extends right through the handle – thereby ensuring full transfer of force, even when struck with a hammer. The ductile tempered material prevents the blade from splintering or breaking.



The outstanding design of the Kraftform handle that fits perfectly into the hand. Prevents hand injuries such as blisters and calluses. Wera Kraftform: a synonym for “graspable” ergonomics!

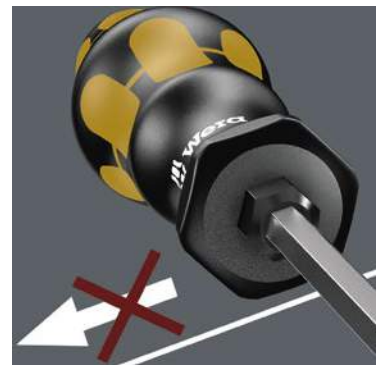

The hexagonal non-roll feature prevents any annoying rolling away at the workplace.



Kraftform Plus – Series 900

The chiseldriver for fastening and chiselling

932 A Screwdriver for slotted screws



Application: Slotted screws

Blade: Hexagonal throughout with impact cap, hexagonal bolster from 0.8 x 4.5

Design: Chrome-plated, Black Point

Handle: Kraftform with non-roll feature, multi-component, sizes 2.0 x 12.0, 2.5 x 14.0: Kraftform with non-roll feature, single-component

	mm	mm	mm	mm	mm	mm	mm
05018260001 ¹⁾	0,6	3,5	4		80	81	$\frac{9}{64}$ " $3\frac{1}{8}$ "
05018262001	0,8	4,5	5	8	90	98	$0,178$ " $3\frac{1}{2}$ "
05018264001	1,0	5,5	6	10	100	105	$\frac{7}{32}$ " 4 "
05018266001	1,2	7,0	6	10	125	105	$\frac{9}{32}$ " 5 "
05018268001	1,6	9,0	8	13	150	112	$\frac{11}{32}$ " 6 "
05018270001	1,6	10,0	8	13	175	112	$\frac{3}{8}$ " 7 "
05018272001	2,0	12,0	10	16	200	117	$\frac{1}{2}$ " 8 "
05018274001	2,5	14,0	10	16	250	117	$\frac{9}{16}$ " 10 "

¹⁾ Blade: Round, no impact cap, no hexagon bolster

932 A Screwdriver for slotted screws



		4013288
05100085001	1 x 1.0x5.5x100	181596
05100086001	1 x 1.2x7.0x125	181602
05100087001	1 x 1.6x9.0x150	181619



917 SPHS Screwdriver for Phillips screws



Application: Phillips screws

Blade: Hexagonal throughout, impact cap with integrated square socket for insertion of $\frac{1}{4}$ " blades for higher torque

Design: Chrome-plated, Black Point

Handle: Kraftform with non-roll feature, multi-component

	mm	mm	mm	mm	mm	mm
05017040001	PH 1	5	8	90	98	$3\frac{35}{64}$ "
05017041001	PH 2	6	10	113	105	$4\frac{29}{64}$ "

932 AS Screwdriver for slotted screws



Application: Slotted screws

Blade: Hexagonal throughout, impact cap with integrated square socket for insertion of $\frac{1}{4}$ " blades for higher torque, hexagonal bolster

Design: Chrome-plated, Black Point

Handle: Kraftform with non-roll feature, multi-component

	mm	mm	mm	mm	mm	mm	mm
05018300001	0,8	4,5	5	8	100	98	$0,178$ " $4\frac{3}{64}$ "
05018301001	1,0	5,5	6	10	113	105	$\frac{7}{32}$ " $4\frac{1}{16}$ "
05018302001	1,2	7,0	6	10	138	105	$\frac{9}{32}$ " $5\frac{7}{16}$ "

917 SPH Screwdriver for Phillips screws



Application: Phillips screws

Blade: Hexagonal throughout with impact cap, hexagonal bolster for sizes 1 - 4

Design: Chrome-plated, Black Point

Handle: Kraftform with non-roll feature, multi-component, size 4/200: Kraftform with non-roll feature, single-component

	mm	mm	mm	mm	mm	mm
05017005001	PH 1	5	8	80	98	$3\frac{1}{8}$ "
05017010001	PH 2	6	10	100	105	4 "
05017015001	PH 3	8	13	150	112	6 "
05017020001	PH 4	10	16	200	117	8 "

917 SPH Screwdriver for Phillips screws



		4013288
05100075001	1 x PH 1x80	181565
05100076001	1 x PH 2x100	181572
05100077001	1 x PH 3x150	181589





918 SPZ Screwdriver for Pozidriv screws



Application: Suitable for Pozidriv screws

Blade: Hexagonal throughout with impact cap, hexagonal bolster for sizes 1 - 4

Design: Chrome-plated, Black Point

Handle: Kraftform with non-roll feature, multi-component, size 4/200: Kraftform with non-roll feature, single-component

		mm	mm	mm	mm	mm
05017050001	PZ 1	5	8	80	98	3 1/8"
05017052001	PZ 2	6	10	100	105	4"
05017054001	PZ 3	8	13	150	112	6"
05017056001	PZ 4	10	16	200	117	8"

918 SPZ Screwdriver for Pozidriv screws



4013288

05100080001	1 x PZ 1x80	181633
05100081001	1 x PZ 2x100	181640
05100082001	1 x PZ 3x150	181657



977 Screwdriver for TORX® screws



Application: TORX® socket screws

Blade: Hexagonal throughout with impact cap, hexagonal bolster

Design: Chrome-plated, Black Point

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	mm	mm	mm
05024400001	TX 15	5	8	80	98	3 1/8"
05024401001	TX 20	5	8	90	98	3 1/2"
05024402001	TX 25	6	10	100	105	4"
05024403001	TX 27	6	10	125	105	5"
05024404001	TX 30	8	13	150	112	6"
05024405001	TX 40	8	13	150	112	6"

Tip



Why is the Kraftform Plus handle made from several components?



Wera makes its Kraftform handles from several materials with different properties. The core is made from a hardwearing plastic that holds the blade securely even when subjected to great forces. The yellow soft zones of the external mantle consist of a softer material with more friction resistance for high torque transfer. The black

areas with a harder surface prevent the hand from sticking to the handle enabling you to adjust your grip more quickly.



Wera Black Point tip



The Wera Black Point tip and a refined hardening process ensure long service life of the tip, improved corrosion protection and an exact fit.



Impact cap with integrated square socket



Even higher torque can be transferred by connecting the square drive version to a T-handle or Zyklop ratchet.

Kraftform Plus – Series 900

The chiseldriver for fastening and chiselling

Big Pack 900 Screwdriver set Kraftform Wera: Chiseldriver and rack



Application: Slotted, Phillips, Pozidriv and TORX® socket screws

Content: 13-piece set

	
05133285001	
	917 SPH 1 x PH 1x80; 1 x PH 2x100; 1 x PH 3x150
	918 SPZ 1 x PZ 1x80; 1 x PZ 2x100; 1 x PZ 3x150
	932 A 1 x 0,6x3,5x80 ¹⁾ ; 1 x 0,8x4,5x90; 1 x 1,0x5,5x100; 1 x 1,2x7,0x125; 1 x 1,6x9,0x150
	977 TORX® 1 x TX 20x90; 1 x TX 25x100
	Rack 2 x 190,0x50,0

¹⁾ Blade: Round, no impact cap, no hexagon bolster

932 S/6 Screwdriver set Kraftform Wera: Chiseldriver and rack



Application: Slotted and Phillips screws, impact cap with integrated square socket for insertion of 1/4" blades for higher torque

Content: 6-piece set and rack in display carton

	
05018283001	
	917 SPHS 1 x PH 1x90; 1 x PH 2x113
	932 A 1 x 0,6x3,5x80 ¹⁾
	932 AS 1 x 0,8x4,5x100; 1 x 1,0x5,5x103; 1 x 1,2x7,0x138

¹⁾ Blade: Round, no impact cap, no hexagon bolster

932/6 Screwdriver set Kraftform Wera: Chiseldriver and rack



Application: Slotted and Phillips screws

Content: 6-piece set and rack in display carton

	
05018282001	
	917 SPH 1 x PH 1x80; 1 x PH 2x100
	932 A 1 x 0,6x3,5x80 ¹⁾ ; 1 x 0,8x4,5x90; 1 x 1,0x5,5x100; 1 x 1,2x7,0x125

¹⁾ Blade: Round, no impact cap, no hexagon bolster



932/918/6 Screwdriver set Kraftform Wera: Chiseldriver and rack



Application: Slotted and Pozidriv screws
Content: 6-piece set and rack in display carton

05018287001	
+	918 SPZ 1 x PZ 1x80; 1 x PZ 2x100
-	932 A 1 x 0,6x3,5x80 ¹⁾ ; 1 x 0,8x4,5x90; 1 x 1,0x5,5x100; 1 x 1,2x7,0x125

¹⁾ Blade: Round, no impact cap, no hexagon bolster

977/6 TORX® Screwdriver set Kraftform Wera: Chiseldriver and rack



Application: TORX®
Content: 6-piece set and rack in display carton

05024410001	
*	977 TORX® 1 x TX 15x80; 1 x TX 20x90; 1 x TX 25x100; 1 x TX 27x125; 1 x TX 30x150; 1 x TX 40x150



Kraftform Screwdrivers

Series 300

Kraftform Plus screwdrivers – ergonomics you can grasp. They relieve the entire hand-arm system even when used intensively.

Along with other technical and product advantages such as the Lasertip for a secure fit in the screw head, Kraftform screwdrivers are the ideal choice whenever manual screwdriving jobs are concerned.




The outstanding design of the Kraftform handle that fits perfectly into the hand prevents hand injuries such as blisters and calluses.



The hard materials used for the handle ensure rapid hand repositioning without any danger of the skin “sticking” to the handle. The surrounding hard zones with large diameters glide like wheels across the hand.



The basic idea for the prototype of the Kraftform handle – that the hand should dictate the design – has, right through to today, proved to be correct. In cooperation with the internationally recognised Fraunhofer IAO Institute, Wera developed a screwdriver handle designed to match the shape of the human hand as long ago as the 1960s. After a long development phase, the Wera Kraftform handle was launched to the market in 1968. It has been optimised through the years with new technologies, but has kept its proven shape. After all, the human hand has not changed either.

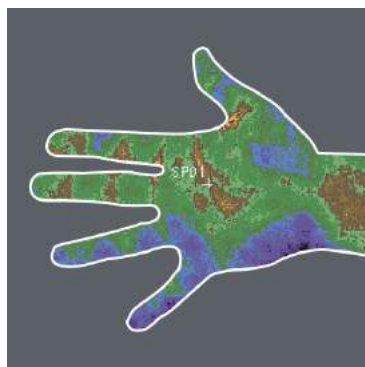

The large contact area – with particularly high friction to the soft zones – results in high torque transfer without any bruising from the edges.



A precisely-focused laser creates a sharp-edged surface structure. This laser treatment results in an edge hardness of up to 1000 HV 0.3. Wera Lasertip “bites” itself into the screw head and prevents any slips out of the recess. It is available for screwdrivers for slotted, Phillips and Pozidriv screws.



Wera Lasertip reduces the contact pressure required and enhances force transfer – meaning less screwdriving effort is required. Screwdriving becomes safer and easier.



The screw symbol and tip size identification markings on the handle make it easier to find the right screwdriver in the tool case or at the workplace.



The hexagonal non-roll feature prevents any rolling away at the workplace.

Kraftform Plus – Series 300

The right tool for every application

335 Screwdriver for slotted screws



Application: Slotted screws

Blade: Round

Design: Chrome-plated, Lasertip

Handle: Kraftform with non-roll feature, multi-component

	mm	mm	mm	mm	mm	mm	mm
05008006001 ¹⁾	0,4	2,0	60	70	2,5	$\frac{5}{64}$ "	$2\frac{3}{8}$ "
05110000001 ¹⁾	0,4	2,5	60	70	2,5	$\frac{3}{32}$ "	$2\frac{3}{8}$ "
05008007001 ¹⁾	0,4	2,5	75	70	2,5	$\frac{3}{32}$ "	3"
05008008001 ¹⁾	0,5	3,0	150	81	4,0	$\frac{1}{8}$ "	6"
05008009001 ¹⁾	0,5	3,0	200	81	4,0	$\frac{1}{8}$ "	8"
05110001001 ¹⁾	0,5	3,0	80	81	3,0	$\frac{1}{8}$ "	$3\frac{1}{8}$ "
05008015001	0,6	3,5	100	81	3,5	$\frac{9}{64}$ "	4"
05110002001	0,6	3,5	125	81	3,5	$\frac{9}{64}$ "	5"
05110003001	0,6	3,5	200	81	3,5	$\frac{9}{64}$ "	8"
05110004001	0,8	4,0	100	98	4,0	$\frac{5}{32}$ "	4"
05110005001	0,8	4,0	150	98	4,0	$\frac{5}{32}$ "	6"
05110006001	0,8	4,0	200	98	4,0	$\frac{5}{32}$ "	8"
05008027001 ¹⁾	0,8	4,0	300	98	4,0	$\frac{5}{32}$ "	12"
05110007001	1,0	5,5	125	98	5,5	$\frac{7}{32}$ "	5"
05008055001	1,0	5,5	150	98	5,5	$\frac{7}{32}$ "	6"
05110008001	1,0	5,5	200	98	5,5	$\frac{7}{32}$ "	8"
05008060001 ¹⁾	1,0	5,5	300	98	5,5	$\frac{7}{32}$ "	12"
05008061001	1,2	6,0	100	105	6,0	$\frac{5}{16}$ "	4"

¹⁾ without Lasertip

335 SB Slotted screwdriver

		4013288
05100042001	1 x 0.6x3.5x100	181275
05100043001	1 x 0.8x4.0x100	181251
05100044001	1 x 1.0x5.5x125	181244



334 SK Screwdriver for slotted screws



Application: Slotted screws

Blade: Hexagonal with bolster from 0.8 x 4.5

Design: Chrome-plated, Lasertip

Handle: Kraftform with non-roll feature, multi-component

	mm	mm	mm	mm	mm	mm	mm
05007670001	0,6	3,5	4	-	75	81	$\frac{9}{16}$ " 3"
05007671001	0,8	4,0	4	-	90	81	$\frac{5}{32}$ " $3\frac{1}{2}$ "
05007672001	0,8	4,5	5	8	90	98	0,178" $3\frac{1}{2}$ "
05007673001	1,0	5,5	6	10	100	98	$\frac{7}{32}$ " 4"
05007674001	1,2	6,5	6	10	125	105	$\frac{1}{4}$ " 5"
05007675001	1,2	7,0	6	10	125	105	$\frac{9}{32}$ " 5"
05007676001	1,6	9,0	8	13	150	112	$\frac{11}{32}$ " 6"
05007677001	1,6	10,0	8	13	175	112	$\frac{3}{8}$ " 7"

334 Screwdriver for slotted screws



Application: Slotted screws

Blade: Round

Design: Chrome-plated, Lasertip

Handle: Kraftform with non-roll feature, multi-component, sizes 2.0 x 12.0, 2.5 x 14.0: Kraftform with non-roll feature, single-component

	mm	mm	mm	mm	mm	mm	mm
05007610001	0,8	5,0	100	98	5,0	$\frac{3}{16}$ "	4"
05007620001	1,0	6,0	125	105	6,0	$\frac{1}{4}$ "	5"
05340330001	1,0	6,0	150	105	6,0	$\frac{1}{4}$ "	6"
05110010001	1,2	6,5	150	105	6,0	$\frac{1}{4}$ "	6"
05007635001	1,2	7,0	150	105	7,0	$\frac{9}{32}$ "	6"
05007621001	1,2	6,5	200	105	7,0	$\frac{9}{32}$ "	8"
05110011001	1,2	8,0	175	112	7,0	$\frac{5}{16}$ "	7"
05007640001	1,6	8,0	175	112	7,0	$\frac{5}{16}$ "	7"
05110104001	1,6	10,0	200	112	9,0	$\frac{3}{8}$ "	8"
05110105001 ¹⁾	2,0	12,0	250	117	10,0	$\frac{1}{2}$ "	10"

¹⁾ without Lasertip



334 Screwdriver for slotted screws SB

		
		4013288
05100030001	● 1 x 1.2x6.5x150	181411
05100031001	● 1 x 1.2x8.0x175	181220



378 B Screwdriver for slotted screws



Application: Slotted screws

Blade: Square as bolster

Design: Chrome-plated, Black Point

Handle: Kraftform with non-roll feature, multi-component, sizes 2.0 x 12.0 x 250, 2.5 x 14.0 x 225; Kraftform with non-roll feature, single-component

							
	mm	mm	mm	mm	mm	mm	mm
05110050001	0,8	4,0	4	75	98	5/32"	3"
05110051001	1,0	5,5	5	100	98	7/32"	4"
05110052001	1,2	6,5	6	125	105	1/4"	5"
05110053001	1,6	8,0	8	150	112	5/16"	6"
05007355001	1,6	10,0	8	60	112	3/8"	2 3/8"
05110054001	1,6	10,0	8	175	112	3/8"	7"
05110150001	1,6	10,0	8	200	112	3/8"	8"
05110055001	2,0	12,0	10	200	112	1/2"	8"
05110151001	2,0	12,0	10	250	112	1/2"	10"

Tip



How to prevent the screwdriver from slipping out of the screw head?



It happens time and time again that the tip slips out of the screw head when screwdriving, sometimes damaging valuable surfaces or even causing injury. The tips of the Wera Lasertip screwdrivers are microscopically roughened by means of a laser. This rough surface literally "bites" itself firmly into the screw head. Slipping out becomes a thing of the past.



Why is the Kraftform Plus handle made out of several components?



Wera produces the Kraftform handle out of several materials with different properties. A resistant plastic is used for the core which ensures that the blade is held securely, even under high strain. A softer material is used for the coloured soft zones, which has a high frictional resistance and allows the transfer of high forces – thus requiring less screwdriving effort. The black sections with their hard surfaces prevent any "sticking" of the hand to the handle, making rapid repositioning of the hand possible.



Wera Black Point tip



The Wera Black Point tip and a refined hardening process ensure long service life of the tip, improved corrosion protection and an exact fit.

Kraftform Plus – Series 300

The right tool for every application

350 SK PH Screwdriver for Phillips screws



Application: Phillips screws

Blade: Hexagonal, sizes 1 - 3 with bolster

Design: Chrome-plated, Lasertip

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	mm	mm	mm
05008750001 ¹⁾	PH 0	4		60	81	2 3/8"
05008751001	PH 1	5	8	80	98	3 1/8"
05008752001	PH 2	6	10	100	105	4"
05008753001	PH 3	8	13	150	112	6"

¹⁾ without Lasertip

350 PH Screwdriver for Phillips screws



Application: Phillips screws

Blade: Round

Design: Chrome-plated, Lasertip

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	mm	mm
05008705001 ¹⁾	PH 0	60	81	3,0	2 3/8"
05008706001 ¹⁾	PH 0	100	81	3,0	4"
05008710001	PH 1	80	98	4,5	3 1/8"
05008712001	PH 1	200	98	4,5	8"
05008715001 ¹⁾	PH 1	300	98	4,5	12"
05008720001	PH 2	100	105	6,0	4"
05008723001	PH 2	150	105	6,0	6"
05008725001	PH 2	200	105	6,0	8"
05008730001 ¹⁾	PH 2	300	105	6,0	12"
05008735001	PH 3	150	112	8,0	6"
05008740001 ¹⁾	PH 4	200	112	10,0	8"

¹⁾ without Lasertip

350 PH SB Screwdriver for Phillips screws

05100050001	1 x PH 0x60 ¹⁾	181329
05100051001	1 x PH 1x80	181336
05100052001	1 x PH 2x100	181343

¹⁾ without Lasertip





355 SK PZ Screwdriver for Pozidriv screws



Application: Suitable for Pozidriv screws

Blade: Hexagonal, sizes 1 - 3 with bolster

Design: Chrome-plated, Lasertip

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	mm	mm	
05009340001 ¹⁾	PZ 0	4		60	81	2 3/8"
05009341001	PZ 1	5	8	80	98	3 1/8"
05009342001	PZ 2	6	10	100	105	4"
05009343001	PZ 3	8	13	150	112	6"

¹⁾ without Lasertip

355 PZ Screwdriver for Pozidriv screws



Application: Suitable for Pozidriv screws

Blade: Round

Design: Chrome-plated, Lasertip

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	mm	
05009305001 ¹⁾	PZ 0	60	81	3,0	2 3/8"
05009310001	PZ 1	80	98	4,5	3 1/8"
05009312001	PZ 1	200	98	4,5	8"
05009313001 ¹⁾	PZ 1	300	98	4,5	12"
05009315001	PZ 2	100	105	6,0	4"
05009317001	PZ 2	200	105	6,0	8"
05347743001	PZ 2	250	105	6,0	10"
05009319001 ¹⁾	PZ 2	300	105	6,0	12"
05009320001	PZ 3	150	112	8,0	6"
05009325001 ¹⁾	PZ 4	200	112	10,0	8"

¹⁾ without Lasertip

355 PZ SB Screwdriver for Pozidriv screws

		4013288
05100055001	1 x PZ 0x60 ¹⁾	181282
05100056001	1 x PZ 1x80	181299
05100057001	1 x PZ 2x100	181305



Kraftform Plus – Series 300

The right tool for every application

354 Screwdriver for hexagon socket screws



Application: Hexagon socket screws

Blade: Round

Design: Hex-Plus, chrome-plated

Handle: Kraftform with non-roll feature, multi-component

					
	mm	mm	mm	mm	"
05023105001	2,0	75	70	3,0	3"
05023107001	2,5	75	81	3,0	3"
05023110001	3,0	75	81	4,0	3"
05023115001	4,0	75	98	5,0	3"
05023120001	5,0	80	105	6,0	3 1/8"
05023125001	6,0	80	105	7,0	3 1/8"
05023130001	8,0	100	112	10,0	4"

352 Ball end screwdriver for hexagon socket screws



Application: Hexagon socket screws

Blade: Hexagonal

Design: Ball end hexagon, chrome-plated, Black Point

Handle: Kraftform with non-roll feature, multi-component, sizes W/F 12,0, W/F 1/2": Kraftform with non-roll feature, single-component

					
	mm	mm	mm	mm	"
05022795001	1,5		60	70	2 3/8"
05022800001	2,0		100	70	4"
05138070001	2,5		100	81	4"
05022805001	3,0		100	81	4"
05022810001	4,0		100	98	4"
05022815001	5,0		100	105	4"
05022820001	6,0		125	105	5"
05022825001	8,0		150	112	6"
05022830001	10,0		150	112	6"
05022835001	12,0		150	117	6"
05022905001		5/32"	100	98	4"
05022910001		3/16"	100	105	4"
05022915001		7/32"	100	105	4"
05022920001		1/4"	125	105	5"
05022925001		5/16"	150	112	6"
05022930001		3/8"	150	112	6"
05022935001		1/2"	150	117	6"

367 TORX® HF Screwdriver with holding function for TORX® screws



Application: TORX® socket screws

Blade: Round

Design: Holding function for TORX® screws made according to Acument Intellectual Properties specifications, chrome-plated

Handle: Kraftform with non-roll feature, multi-component

					
		mm	mm	mm	"
05028048001	TX 8	60	81	3,5	2 3/8"
05028049001	TX 9	60	81	4,0	2 3/8"
05028050001	TX 10	80	81	4,0	3 1/8"
05028051001	TX 15	80	98	4,0	3 1/8"
05028052001	TX 20	100	98	4,5	4"
05028070001	TX 20	300	98	4,5	12"
05028053001	TX 25	100	105	5,0	4"
05028071001	TX 25	300	105	6,0	12"
05028054001	TX 27	115	105	5,5	4 9/16"
05028072001	TX 27	300	105	6,0	12"
05028055001	TX 30	115	105	6,0	4 9/16"
05028073001	TX 30	300	105	6,0	12"
05028056001	TX 40	130	112	7,0	5 3/16"




Tip



TORX® and hexagon ball tip



The spherical drive profile means that it is possible to swivel the axis of the tool to that of the screw, and therefore enable angled, "around-the-corner" screwdriving jobs. This ball tip geometry – often found on L-keys – is now available on a number of Wera bits.



What is the purpose of the HF profile?



In tight assembly or disassembly situations, for example in engine compartments, it is not possible to securely hold the screw with the hand on the screwdriver, and the screw subsequently often gets lost. Lengthy searches or the loss of the screw (with the associated danger that could bring about) are the consequence. The HF

tools developed by Wera are ideal because they feature an optimised geometry of the original TORX® profile. The wedging forces resulting from the surface pressure between the drive tip and the screw profile mean that the screw is securely held on the tool!



How to prevent rounded screw heads?



Hexagon socket screws are a problem, because the contact surfaces that transfer the force of the tool to the screw are very narrow. The consequence: the head of the screw can be damaged, usually rounding out the recess. Hex-Plus tools have larger contact surfaces to prevent this, driving from the flats of the recess, rather than the corners. Good to know: Hex-Plus tools fit into every standard hexagon socket screw!

367 Screwdriver for TORX® screws



Application: TORX® socket screws

Blade: Round

Design: Chrome-plated, Black Point

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	mm	
05028000001	TX 5	60	70	3,5	2 3/8"
05028001001	TX 6	60	70	3,5	2 3/8"
05028002001	TX 7	60	70	3,5	2 3/8"
05028003001	TX 8	60	81	3,5	2 3/8"
05028004001	TX 9	60	81	4,0	2 3/8"
05028005001	TX 10	80	81	4,0	3 1/8"
05028008001	TX 15	80	98	4,0	3 1/8"
05028010001	TX 20	100	98	4,5	4"
05028012001	TX 25	100	105	5,0	4"
05028013001	TX 27	115	105	5,5	4 9/16"
05028015001	TX 30	115	105	6,0	4 9/16"
05028020001	TX 40	130	112	7,0	5 1/8"
05028025001	TX 45	130	112	8,0	5 1/8"

367 SB Screwdriver for TORX® screws


		4013288
05100060001	1 x TX 10x80	181350
05100061001	1 x TX 15x80	181367
05100062001	1 x TX 20x100	181374
05100063001	1 x TX 25x100	181381
05100064001	1 x TX 30x115	181398



Kraftform Plus – Series 300

The right tool for every application

367 K Ball end screwdriver for TORX® screws



Application: TORX® socket screws

Blade: Round

Design: Ball end, chrome-plated, Black Point

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	mm	"
05027950001	TX 15	80	98	4,0	3 1/8"
05027952001	TX 20	100	98	4,5	4"
05027954001	TX 25	100	105	5,0	4"
05027956001	TX 27	115	105	5,5	4 9/16"
05027958001	TX 30	115	105	6,0	4 9/16"

367 TORX® B0 Screwdriver for tamper-proof TORX® screws



Application: TORX® screws with safety pin

(B0 = with bore hole)

Blade: Round

Design: Bore hole in TORX® section, chrome-plated, Black Point

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	mm	"
05138257001	TX 7	60	70	3,5	2 3/8"
05138258001	TX 8	60	81	3,5	2 3/8"
05138259001	TX 9	60	81	4,0	2 3/8"
05138260001	TX 10	80	81	4,0	3 1/8"
05138268001	TX 10	300	81	4,0	12"
05138261001	TX 15	80	98	4,0	3 1/8"
05138269001	TX 15	300	98	4,0	12"
05138262001	TX 20	100	98	4,5	4"
05138270001	TX 20	300	98	4,5	12"
05138263001	TX 25	100	105	5,0	4"
05138264001	TX 27	115	105	5,5	4 9/16"
05138265001	TX 30	115	105	6,0	4 9/16"
05138266001	TX 40	130	112	7,0	5 3/16"

367 TORX PLUS® Screwdriver for TORX PLUS® screws



Application: TORX PLUS® socket screws

Blade: Round

Design: Chrome-plated, Black Point

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	mm	"
05028029001	5 IP	60	70	3,5	2 3/8"
05028030001	6 IP	60	70	3,5	2 3/8"
05028031001	7 IP	60	70	3,5	2 3/8"
05028032001	8 IP	60	70	3,5	2 3/8"
05028033001	9 IP	60	81	4,0	2 3/8"
05028034001	10 IP	80	81	4,0	3 1/8"
05028035001	15 IP	80	98	4,0	3 1/8"
05028036001	20 IP	100	98	4,5	4"
05028037001	25 IP	100	105	5,0	4"
05028038001	30 IP	115	105	6,0	4 9/16"

371 TORQ-SET® Mplus screwdriver for TORQ-SET® screws



Application: TORQ-SET® screws

Blade: Round

Design: Mplus for higher breaking torque and longer service life, chrome-plated


Handle: Kraftform with non-roll feature, multi-component

	mm	mm	mm	mm	"
05028130001	6	80	98	4,5	3 1/8"
05028132001	8	100	105	6,0	4"
05028134001	10	100	105	6,0	4"
05028136001	1/4"	125	112	8,0	5"



Tip

How can I prevent frequent breakages of TORQ-SET® tools?



Wera developed the Mplus profile with stronger flanks compared with tools with a conventional TORQ-SET® profile. This results in approximately 70 % extra torsional strength and greatly extends the service life of Wera Mplus tools.

368 Screwdriver for square socket head screws



Application: Square socket screws

Blade: Round

Design: Chrome-plated, Black Point except for sizes 01+02

Handle: Kraftform with non-roll feature, multi-component, # 2/300, # 01/25, # 02/25: single-component

			mm	mm	mm	
05117680001		# 00	60	81	3,5	2 3/8"
05117681001		# 0	60	81	4,0	2 3/8"
05117682001		# 1	80	98	4,5	3 1/8"
05117683001		# 1	200	98	4,5	8"
05117684001		# 2	100	105	6,0	4"
05117685001		# 2	200	105	6,0	8"
05117691001		# 2	300	105	6,0	12"
05117686001		# 3	150	112	8,0	6"
05117687001		# 4	200	112	8,0	8"
05117688001		# 01	25	54	4,5	1"
05117689001		# 02	25	54	6,0	1"

368 SB Screwdriver for square socket head screws

			4013288
05100070001		1 x # 1x80	181404
05100071001		1 x # 2x100	181428
05100072001		1 x # 3x150	181435



TORX PLUS®



Compared with the "normal" TORX® profile, the elliptical instead of circular profile enlarges the 6 flanks that transfer torque between the tool and the screw. This means that the force applied when screwdriving is spread across a larger surface area. Higher torque is transferred and, in addition, the service life of the screw and tool are lengthened. The so-called centre-lock screws on cutting tools represent a typical use of this type of screw profile. The thermal influences on such holders for carbide insert tips often "bake" the retaining screws so firmly that it is important to have

a profile that considerably enhances the loosening torque capability of the screws. For this reason a torque-stable screw profile is necessary to avoid any possible damage to the screw and to exclude the possibility of an otherwise costly machine downtime.

TORX® with borehole (BO)



TORX® tools with a borehole prevent the unauthorised unfastening of safety screws. The screws contain a pin that protrudes into the drive profile so that "normal" TORX® tools cannot be used. This pin fits into the borehole of TORX® BO tools allowing safety screws to be unfastened.

Kraftform Plus – Series 300

The right tool for every application

375 TRI-WING® screwdriver for TRI-WING® screws



Application: TRI-WING® screws

Blade: Round

Design: Chrome-plated, Black Point

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	mm	
05028116001	0	80	81	3,5	3 1/8"
05028118001	1	80	81	3,5	3 1/8"
05028120001	2	80	98	4,5	3 1/8"
05028122001	3	80	98	4,5	3 1/8"
05028124001	4	100	98	6,0	4"
05028126001	5	100	98	6,0	4"

395 Nutdriver



Application: Hexagon headed bolts, screws and nuts

Blade: Round

Design: Chrome-plated, nutdriver for hexagon head bolts

Handle: Kraftform with non-roll feature, multi-component

	mm	mm	mm	mm	
05028205001	3,0	125	98	5,0	5"
05028210001	3,5	125	98	6,1	5"
05028215001	4,0	125	98	6,9	5"
05028220001	4,5	125	98	7,1	5"
05028225001	5,0	125	98	8,1	5"
05028230001	5,5	125	98	8,1	5"
05029405001	6,0	125	98	9,1	5"
05029410001	7,0	125	105	11,0	5"
05029415001	8,0	125	105	12,1	5"
05029420001	9,0	125	105	13,1	5"
05029425001	10,0	125	112	14,1	5"
05029430001	11,0	125	112	16,0	5"
05029435001	12,0	125	112	17,1	5"
05029440001	13,0	125	112	18,1	5"
05029445001	14,0	125	112	19,1	5"
05029450001	15,0	125	112	21,0	5"

391 Hose clamp screwdriver



Application: Hexagon headed bolts, screws and nuts

Blade: Round, flexible

Design: Nutdriver for hexagon head bolts

Handle: Kraftform with non-roll feature, multi-component

	mm	mm	mm	
05028148001	6	167	98	6 9/16"
05028150001	7	167	98	6 9/16"
05028152001	8	167	98	6 9/16"

395 H0 Nutdriver



Application: Hexagon headed bolts, screws and nuts

Blade: Round

Design: Chrome-plated, hollow shaft for protruding threaded rods

Handle: Kraftform with non-roll feature, multi-component


TIP: The hollow shaft enables seized screws or those on long threads to be tightened and loosened

						
	mm	mm	mm	mm	mm	mm
05029460001	5,0		70	98	7,2	2 ²⁵ / ₃₂ "
05029461001	5,5		70	98	7,2	2 ²⁵ / ₃₂ "
05029462001	6,0		70	98	7,2	2 ²⁵ / ₃₂ "
05029463001	7,0		80	105	7,2	3 ⁵ / ₃₂ "
05029464001	8,0		80	105	9,3	3 ⁵ / ₃₂ "
05029465001	10,0		80	112	9,3	3 ⁵ / ₃₂ "
05029466001	13,0		80	112	11,0	3 ⁵ / ₃₂ "
05029501001		³ / ₁₆ "	70	98	7,2	2 ²⁵ / ₃₂ "
05029502001		¹ / ₄ "	70	98	7,2	2 ²⁵ / ₃₂ "
05029503001		⁵ / ₁₆ "	80	105	9,3	3 ⁵ / ₃₂ "
05029504001		¹¹ / ₃₂ "	80	105	9,3	3 ⁵ / ₃₂ "
05029505001		³ / ₈ "	80	112	9,3	3 ⁵ / ₃₂ "
05029506001		⁷ / ₁₆ "	80	112	11,0	3 ⁵ / ₃₂ "
05029507001		¹ / ₂ "	80	112	11,0	3 ⁵ / ₃₂ "

Tip



What is the purpose of a screwdriver with hollow shaft?



A screwdriver with a hollow shaft is needed whenever there are screwdriving jobs involving threaded rods i.e. the threaded rod through the nut can slip into the hollow shaft of the screwdriver.



Flexible shaft



Screwdriving can also be achieved "around the corner" with the screwdriver 391. The flexible shaft allows unfavourably-positioned screw fastenings to be reached. The ideal tool for difficult-to-access screwdriving applications e.g. in the engine compartment of a car.

The TRI-WING® screwdriving system



The TRI-WING® screwdriving system is mainly found in aviation and household technology (here e.g. on live components). The asymmetric arrangement of the three profile flanks prevents the use of anything other than the original tools. The high-precision Wera profile design ensures a secure fit of the tool in the head of the screw. The blades are manufactured out of bit material. The Wera know-how with regard to the hardening technology ensures a long service life of the tool.

Kraftform Plus – Series 300

The right tool for every application

336 Stubby/Carburettor screwdriver



Application: Slotted screws

Blade: Round

Design: Chrome-plated, Black Point

Handle: Kraftform with non-roll feature, single-component

							
05110068001	mm	mm	mm	mm	mm	mm	mm
05110068001	0,6	3,5	25	54	3,5	$\frac{9}{64}$ "	1"
05110069001	0,8	4,0	25	54	4,0	$\frac{5}{32}$ "	1"
05110070001	1,0	5,5	25	54	5,5	$\frac{7}{32}$ "	1"
05110075001	1,2	6,5	25	54	6,5	$\frac{1}{4}$ "	1"
05110078001	1,2	8,0	25	54	8,0	$\frac{5}{16}$ "	1"

Stubby/Carburettor screwdriver



Application: Phillips screws

Blade: Round

Design: Chrome-plated, Black Point

Handle: Kraftform, with non-roll feature, single-component

					
	mm	mm	mm	mm	mm
05008775001	PH 01	25	54	4,5	1"
05008780001	PH 02	25	54	6,0	1"
05008782001	PH 03	25	54	6,0	1"

Stubby/Carburettor screwdriver



Application: Suitable for Pozidriv screws

Blade: Round

Design: Chrome-plated, Black Point

Handle: Kraftform with non-roll feature, single-component

					
	mm	mm	mm	mm	mm
05009330001	PZ 01	25	54	4,5	1"
05009335001	PZ 02	25	54	6,0	1"
05009337001	PZ 03	25	54	8,0	1"



Kraftform XXL



12-piece screwdriver set for all-round applications

05051010001		
+	350 PH	1 x PH 1x80; 1 x PH 2x100
+	355 PZ	1 x PZ 1x80; 1 x PZ 2x100
●	932 A	1 x 1,0x5,5x100; 1 x 1,2x7,0x125
●	334	1 x 1,2x6,5x150
●	335	1 x 0,8x4,0x100; 1 x 1,0x5,5x125
●	160 i VDE	1 x 0,4x2,5x80 ¹⁾ ; 1 x 0,6x3,5x100
●	247	1 x 0,5x3,0x70
	Rack	2 x 190,0x50,0

¹⁾ without Lasertip

Kraftform XXL 3



11-piece screwdriver set for all-round applications

05347106001		
●	160 i VDE	1 x 0,4x2,5x80 ¹⁾ ; 1 x 0,6x3,5x100
+	350 PH	1 x PH 1x80; 1 x PH 2x100
●	932 A	1 x 1,0x5,5x100; 1 x 1,2x7,0x125
●	335	1 x 0,8x4,0x100; 1 x 1,0x5,5x125
●	334	1 x 1,2x6,5x150
○	368	1 x # 1x80; 1 x # 2x100
	Rack	2 x 190,0x50,0

¹⁾ without Lasertip

Kraftform XXL 2



12-piece screwdriver set for all-round applications

05051011001		
+	350 PH	1 x PH 2x100
+	355 PZ	1 x PZ 1x80; 1 x PZ 2x100
●	932 A	1 x 1,0x5,5x100; 1 x 1,2x7,0x125
●	335	1 x 0,8x4,0x100
+	367 TORX®	1 x TX 15x80; 1 x TX 20x100; 1 x TX 25x100
●	160 i VDE	1 x 0,4x2,5x80 ¹⁾ ; 1 x 0,6x3,5x100
●	247	1 x 0,5x3,0x70
	Rack	2 x 190,0x50,0

¹⁾ without Lasertip
Product not available in the USA and Canada.

Kraftform Big Pack 300



Application: Slotted, cross, Phillips-Recess, Pozidriv and TORX® screws

Content: 14-piece set in display carton

05105630001		
+	350 PH	1 x PH 1x80; 1 x PH 2x100; 1 x PH 3x150
+	355 PZ	1 x PZ 1x80; 1 x PZ 2x100; 1 x PZ 3x150
+	367 TORX®	1 x TX 10x80; 1 x TX 15x80; 1 x TX 20x100; 1 x TX 25x100; 1 x TX 30x115
●	334	1 x 1,2x6,5x150
●	335	1 x 0,6x3,5x100; 1 x 0,8x4,0x100
	Rack	2 x 190,0x50,0

Kraftform Plus – Series 300

The right tool for every application

334 SK/6 Rack screwdriver set Kraftform Plus Lasertip and rack



Lasertip hexagon blades and rack

Application: Slotted and Phillips screws

Content: 6-piece set and rack in display carton

05007680001		
	350 SK PH	1 x PH 1x80; 1 x PH 2x100
	334 SK	1 x 0,6x3,5x75; 1 x 0,8x4,0x90; 1 x 1,0x5,5x100; 1 x 1,2x6,5x125

334/355 SK/6 Screwdriver set Kraftform Plus Lasertip and rack



Lasertip hexagonal blades and rack

Application: Slotted and Pozidriv screws

Content: 6-piece set and rack in display carton

05007681001		
	355 SK PZ	1 x PZ 1x80; 1 x PZ 2x100
	334 SK	1 x 0,6x3,5x75; 1 x 0,8x4,0x90; 1 x 1,0x5,5x100; 1 x 1,2x6,5x125

334/6 Rack screwdriver set Kraftform Plus Lasertip and rack



Lasertip round blades and rack

Application: Slotted and Phillips screws

Content: 6-piece set and rack in display carton

05105650001		
	350 PH	1 x PH 1x80; 1 x PH 2x100
	334	1 x 1,2x6,5x150
	335	1 x 0,5x3,0x80 ¹⁾ ; 1 x 0,8x4,0x100; 1 x 1,0x5,5x125

¹⁾ without Lasertip

334/355/6 Rack screwdriver set Kraftform Plus Lasertip and rack



Lasertip round blades and rack

Application: Slotted and Pozidriv screws

Content: 6-piece set and rack in display carton

05105656001		
	355 PZ	1 x PZ 1x80; 1 x PZ 2x100
	334	1 x 1,2x6,5x150
	335	1 x 0,5x3,0x80 ¹⁾ ; 1 x 0,8x4,0x100; 1 x 1,0x5,5x125

¹⁾ without Lasertip



335/350/355/6 Screwdriver set Kraftform Plus Lasertip and rack



Lasertip blades and rack

Application: Slotted, Phillips and Pozidriv screws

Content: 6-piece set and rack in display carton

05105622001	
	350 PH 1 x PH 1x80; 1 x PH 2x100
	355 PZ 1 x PZ 1x80; 1 x PZ 2x100
	335 1 x 0,8x4,0x100; 1 x 1,0x5,5x125

335/350/367/7 Rack screwdriver set Kraftform Plus Lasertip and rack




Lasertip round blades and rack

Application: Slotted, cross, Phillips-Recess, Pozidriv and TORX® screws

Content: 7-piece set and rack in display carton

05320540001	
	350 PH 1 x PH 2x100
	355 PZ 1 x PZ 1x80; 1 x PZ 2x100
	335 1 x 0,8x4,0x100
	367 TORX® 1 x TX 15x80; 1 x TX 20x100; 1 x TX 25x100

367/7 TORX® HF Kraftform Plus screwdriver set with holding function and rack



Application: TORX®

Content: 7-piece set and rack in display carton

05223161001	
	367 TORX® HF 1 x TX 8x60; 1 x TX 10x80; 1 x TX 15x80; 1 x TX 20x100; 1 x TX 25x100; 1 x TX 27x115; 1 x TX 30x115

367/6 TORX® HF Kraftform Plus screwdriver set with holding function and rack



Application: TORX®

Content: 6-piece set and rack in display carton

05028059001	
	367 TORX® HF 1 x TX 10x80; 1 x TX 15x80; 1 x TX 20x100; 1 x TX 25x100; 1 x TX 30x115; 1 x TX 40x130

Kraftform Plus – Series 300

The right tool for every application

367/4 TORX® HF Kraftform Plus screwdriver set with holding function and 300 mm-long blades



Application: TORX® with holding function, extra long (300 mm) blade

Content: 4-piece set

05028074001	
	367 TORX® HF 1 x TX 20x300; 1 x TX 25x300; 1 x TX 27x300; 1 x TX 30x300

367/6 TORX® B0 Kraftform Plus screwdriver set and rack



Application: TORX® screws with safety pin (B0 = with bore hole)

Content: 6-piece set and rack in display carton

05138250001	
	367 TORX® B0 1 x TX 10x80; 1 x TX 15x80; 1 x TX 20x100; 1 x TX 25x100; 1 x TX 30x115; 1 x TX 40x130

367/6 Screwdriver set Kraftform Plus TORX® and rack




Application: TORX®

Content: 6-piece set and rack in display carton

05028062001	
	367 TORX® 1 x TX 10x80; 1 x TX 15x80; 1 x TX 20x100; 1 x TX 25x100; 1 x TX 30x115; 1 x TX 40x130



334/368/6 Screwdriver set + rack



Application: Slotted, Phillips and square-head screws
Content: 6-piece set and rack in display carton

		
05347778001		
	350 PH	1 x PH 1x80; 1 x PH 2x100
	334	1 x 1,2x6,5x150
	335	1 x 0,8x4,0x100
	368	1 x # 1x80; 1 x # 2x100

395 H0/7 SM Nutdriver set



Application: Hexagon headed bolts, screws and nuts
Content: 7-piece set in display carton
TIP: The hollow shaft enables seized screws or those on long threads to be tightened and loosened

		
05029510001		
	395 H0	1 x 5,0x70; 1 x 5,5x70; 1 x 6,0x70; 1 x 7,0x80; 1 x 8,0x80; 1 x 10,0x80; 1 x 13,0x80


Kraftform Comfort Screwdrivers

The ergonomic introduction to convenient screwdriving.


Handle with Kraftform geometry and blade made from power bit material with Black Point tip for precise fit.



The multi-component Kraftform handle for quick and low-exertion working.

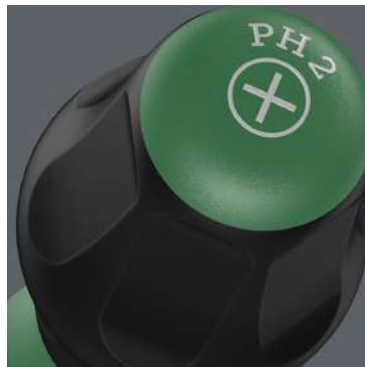

The screw symbol and tip size identification markings on the handle make it easier to find the right screwdriver in the tool case, or at the workplace.

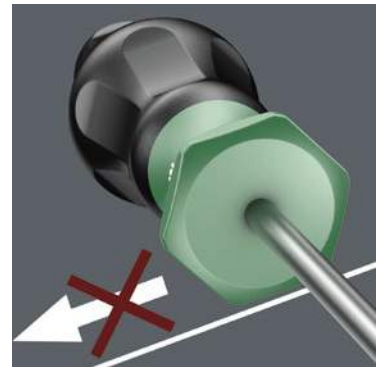

The hexagonal non-roll feature prevents any annoying rolling away.



The Wera Black Point tip and a refined hardening process ensure long service life of the tip, improved corrosion protection and an exact fit.



The bit material used for manufacturing is subjected to a specific Wera hardening process, and this ensures longer product service life.

Kraftform Comfort

Convenient, safe, good!

1335 Screwdriver for slotted screws



Application: Slotted screws

Blade: Round

Design: Chrome-plated, Black Point

Handle: Kraftform Comfort with non-roll feature, multi-component

							
	mm	mm	mm	mm	mm	mm	mm
05031400001	0,4	2,0	60	81	2,5	$\frac{5}{64}$ "	$2\frac{3}{8}$ "
05031401001	0,4	2,5	75	81	2,5	$\frac{3}{32}$ "	3"
05031402001	0,5	3,0	80	81	3,0	$\frac{1}{8}$ "	$3\frac{1}{8}$ "
05031403001	0,5	3,0	150	81	3,0	$\frac{1}{8}$ "	6"
05031405001	0,6	3,5	100	81	3,5	$\frac{9}{64}$ "	4"
05031406001	0,6	3,5	125	81	3,5	$\frac{9}{64}$ "	5"
05031408001	0,8	4,0	100	98	4,0	$\frac{5}{32}$ "	4"
05031409001	0,8	4,0	150	98	4,0	$\frac{5}{32}$ "	6"
05031411001	0,8	4,0	300	98	4,0	$\frac{5}{32}$ "	12"
05031412001	1,0	5,5	125	98	5,5	$\frac{7}{32}$ "	5"
05031413001	1,0	5,5	150	98	5,5	$\frac{7}{32}$ "	6"
05031416001	1,2	6,0	100	105	6,0	$\frac{15}{64}$ "	4"

1334 Screwdriver for slotted screws



Application: Slotted screws

Blade: Round

Design: Chrome-plated, Black Point

Handle: Kraftform Comfort with non-roll feature, multi-component

							
	mm	mm	mm	mm	mm	mm	mm
05031420001	0,8	5,0	100	98	$\frac{3}{16}$ "	$\frac{3}{16}$ "	4"
05031421001	1,0	6,0	125	105	$\frac{15}{64}$ "	$\frac{15}{64}$ "	5"
05031422001	1,2	6,5	150	105	$\frac{1}{4}$ "	$\frac{1}{4}$ "	6"
05031424001	1,2	7,0	150	105	$\frac{9}{32}$ "	$\frac{9}{32}$ "	6"
05031425001	1,2	8,0	175	112	$\frac{5}{16}$ "	$\frac{5}{16}$ "	7"
05031426001	1,6	8,0	175	112	$\frac{5}{16}$ "	$\frac{5}{16}$ "	7"
05031427001	1,6	10,0	200	112	$\frac{3}{8}$ "	$\frac{3}{8}$ "	8"

1350 PH Screwdriver for Phillips screws



Application: Phillips screws

Blade: Round

Design: Chrome-plated, Black Point

Handle: Kraftform Comfort with non-roll feature, multi-component

					
		mm	mm	mm	mm
05031440001	PH 0	60	81	3,0	$2\frac{3}{8}$ "
05031441001	PH 1	80	98	4,5	$3\frac{1}{8}$ "
05031442001	PH 1	200	98	4,5	8"
05031444001	PH 2	100	105	6,0	4"
05031445001	PH 2	200	105	6,0	8"
05031447001	PH 3	150	112	8,0	6"

1355 PZ Screwdriver for Pozidriv screws



Application: Suitable for Pozidriv screws

Blade: Round

Design: Chrome-plated, Black Point

Handle: Kraftform Comfort with non-roll feature, multi-component

					
		mm	mm	mm	mm
05031460001	PZ 0	60	81	3,0	$2\frac{3}{8}$ "
05031461001	PZ 1	80	98	4,5	$3\frac{1}{8}$ "
05031463001	PZ 2	100	105	6,0	4"
05031466001	PZ 3	150	112	8,0	6"



Tip




The Wera Black Point tip



The Wera Black Point tip and a refined hardening process ensure long service life of the tip, improved corrosion protection and an exact fit.

1367 TORX® screwdriver for TORX® screws



Application: TORX® socket screws

Blade: Round

Design: Chrome-plated, Black Point

Handle: Kraftform Comfort with non-roll feature, multi-component

		 mm	 mm	 mm	 "
05031500001	TX 5	60	81	3,5	2 ³ / ₈ "
05031501001	TX 6	60	81	3,5	2 ³ / ₈ "
05031502001	TX 7	60	81	3,5	2 ³ / ₈ "
05031503001	TX 8	60	81	3,5	2 ³ / ₈ "
05031504001	TX 9	60	81	4,0	2 ³ / ₈ "
05031505001	TX 10	80	81	4,0	3 ¹ / ₈ "
05031506001	TX 15	80	98	4,0	3 ¹ / ₈ "
05031507001	TX 20	100	98	4,5	4"
05031508001	TX 25	100	105	5,0	4"
05031509001	TX 27	115	105	5,5	4 ⁹ / ₁₆ "
05031510001	TX 30	115	105	6,0	4 ⁹ / ₁₆ "
05031511001	TX 40	130	112	7,0	5 ³ / ₁₆ "
05031512001	TX 45	130	112	8,0	5 ¹ / ₈ "

Kraftform Comfort

Convenient, safe, good!

1334/6 Screwdriver set Kraftform Comfort



Application: Slotted and Phillips screws

Content: 6-piece set in display carton

05031551001		
+	1350 PH	1 x PH 1x80; 1 x PH 2x100
-	1335	1 x 0,5x3,0x80; 1 x 0,8x4,0x100; 1 x 1,0x5,5x125
-	1334	1 x 1,2x6,5x150

1335/1350/1355/6 Screwdriver set Kraftform Comfort



Application: Slotted, Phillips and Pozidriv screws

Content: 6-piece set in display carton

05031553001		
+	1350 PH	1 x PH 1x80; 1 x PH 2x100
+	1355 PZ	1 x PZ 1x80; 1 x PZ 2x100
-	1335	1 x 0,8x4,0x100; 1 x 1,0x5,5x125

1334/1355/6 Screwdriver set Kraftform Comfort



Application: Slotted and Pozidriv screws

Content: 6-piece set in display carton

05031552001		
+	1355 PZ	1 x PZ 1x80; 1 x PZ 2x100
-	1335	1 x 0,5x3,0x80; 1 x 0,8x4,0x100; 1 x 1,0x5,5x125
-	1334	1 x 1,2x6,5x150

1367/6 TORX® Screwdriver set Kraftform Comfort



Application: TORX® screws

Content: 6-piece set in display carton

05031554001		
+	1367 TORX®	1 x TX 10x80; 1 x TX 15x80; 1 x TX 20x100; 1 x TX 25x100; 1 x TX 30x115; 1 x TX 40x130



Screwdrivers with wooden handles

The traditional screwdriver with very specific product benefits.



Higher torque can be transferred by fitting an open-jaw or ring spanner over the hex bolster that is welded to the blade.



A double leather cap combined with the blade that extends right through the handle provide additional safety and reduce the danger of a splintering of the handle when struck with a hammer.



With pound-thru blade out of high quality bit material. As a result, loss-free transfer of power, even in the case of hammer blows. The material prevents any splintering or breakage of the blade.



The Wera Black Point tip and a refined hardening process ensure long service life of the tip, improved corrosion protection and an exact fit.



Wooden Handle Series

Traditionally good quality!

930 A Screwdriver for slotted screws



Application: Slotted screws
Blade: Round, hexagon bolster
Design: Chrome-plated, Black Point
Handle: Beech wood with leather cap

						
	mm	mm	mm	mm	mm	mm
05018005001	0,6	3,5	8	90	102	$\frac{9}{64}$ " 3 $\frac{1}{2}$ "
05018010001	0,8	4,5	8	90	102	0,178" 3 $\frac{1}{2}$ "
05018015001	1,0	5,5	8	100	102	$\frac{7}{32}$ " 4"
05018020001	1,2	7,0	10	125	111	$\frac{9}{32}$ " 5"
05018025001	1,6	9,0	13	175	126	$\frac{11}{32}$ " 7"
05018030001	1,6	10,0	13	175	126	$\frac{3}{8}$ " 7"
05018035001	2,0	12,0	13	200	126	$\frac{1}{2}$ " 8"
05018040001	2,5	14,0	16	250	140	$\frac{9}{16}$ " 10"

935 SPH Screwdriver for Phillips screws



Application: Phillips screws
Blade: Round, hexagon bolster
Design: Chrome-plated, Black Point
Handle: Beech wood with leather cap

						
	mm	mm	mm	mm	mm	mm
05018350001	PH 1	8	90	102	3 $\frac{1}{2}$ "	
05018352001	PH 2	10	100	111	4"	
05018354001	PH 3	13	175	126	7"	
05018355001	PH 4	16	200	140	8"	

955 SPZ Screwdriver for Pozidriv screws



Application: Suitable for Pozidriv screws
Blade: Round, hexagon bolster
Design: Chrome-plated, Black Point
Handle: Beech wood with leather cap

						
	mm	mm	mm	mm	mm	mm
05023305001	PZ 1	8	90	102	3 $\frac{1}{2}$ "	
05023307001	PZ 2	10	100	111	4"	
05023309001	PZ 3	13	175	126	7"	

930/935/6 Screwdriver set



Application: Slotted and Phillips screws
Content: 6-piece set in display carton

		
05018251001		
	935 SPH	1 x PH 1x90; 1 x PH 2x100
	930 A	1 x 0,6x3,5x90; 1 x 0,8x4,5x90; 1 x 1,0x5,5x100; 1 x 1,2x7,0x125

930/955/6 Screwdriver set



Application: Slotted and Pozidriv screws
Content: 6-piece set in display carton

		
05137810001		
	955 SPZ	1 x PZ 1x90; 1 x PZ 2x100
	930 A	1 x 0,6x3,5x90; 1 x 0,8x4,5x90; 1 x 1,0x5,5x100; 1 x 1,2x7,0x125



Flagdriver Series

The right tool for every application

1267 A TORX® flagdriver for TORX® screws



Application: TORX® socket screws

Blade: Round

Design: BlackLaser surface

Handle: Multi-component

		mm	mm	mm		
05026350001	TX 6	33	62,0	3,0	1 ¹⁹ / ₆₄ "	
05026351001	TX 7	33	62,0	3,0	1 ¹⁹ / ₆₄ "	
05026352001	TX 8	40	69,0	3,0	1 ³⁷ / ₆₄ "	
05026353001	TX 9	40	69,0	3,0	1 ³⁷ / ₆₄ "	
05026354001	TX 10	40	69,0	3,0	1 ³⁷ / ₆₄ "	

1267 B TORX® combination flagdriver for TORX® and hexagon socket screws



Application: TORX® and hexagon socket screws

Blade: Hexagon

Design: TORX® and hexagon, BlackLaser surface

Handle: Multi-component

		mm	mm	mm		
05026372001	TX 15	3,5	47	86,0	1 ²⁷ / ₃₂ "	
05026373001	TX 15	4	47	86,0	1 ²⁷ / ₃₂ "	
05026374001	TX 20	4	47	86,0	1 ²⁷ / ₃₂ "	

1267 A TORX PLUS® flagdriver for TORX PLUS® screws



Application: TORX PLUS® socket screws

Blade: Round

Design: BlackLaser surface

Handle: Multi-component

		mm	mm	mm		
05026360001	6 IP	33	62,0	3,0	1 ¹⁹ / ₆₄ "	
05026361001	7 IP	33	62,0	3,0	1 ¹⁹ / ₆₄ "	
05026363001	9 IP	40	69,0	3,0	1 ³⁷ / ₆₄ "	

1267 B TORX PLUS® combination flagdriver for TORX PLUS® and hexagon socket screws



Application: TORX PLUS® and hexagon socket screws

Blade: Hexagon

Design: TORX PLUS® and hexagon, BlackLaser surface

Handle: Multi-component

		mm	mm	mm		
05026382001	15 IP	3,5	47	86,0	1 ²⁷ / ₃₂ "	

Accessories

Indispensable aids for screwdriving jobs

Wera Star - Magnetizer/Demagnetizer




Application: Simply run the tool down the positive side of the Wera magnetiser/demagnetiser and the tool immediately becomes magnetised and is able to hold the screw securely on the blade. To demagnetise the tool, simply run it down one of the four negative sides.

	
05073403001	
Wera Star	1 x 48,0



Magnetising

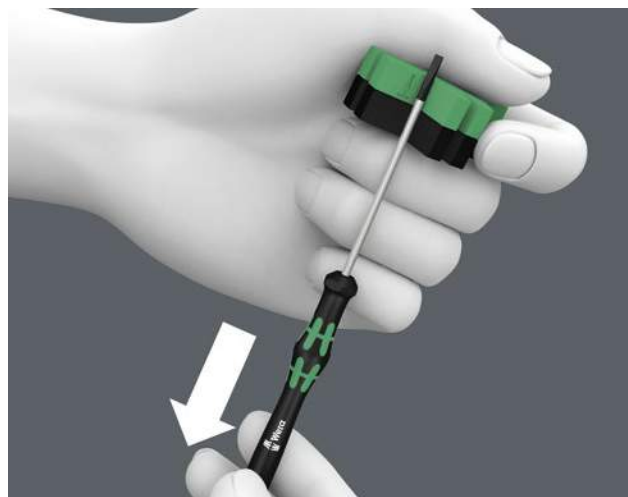

Demagnetising

1427 Awl



Handle: single-component

Blade: Extends through handle

			
	mm	mm	
05027405001	105	92	4 ³ / ₁₆ "

1428 Reamer



Handle: single-component

Blade: Extends through handle

			
	mm	mm	
05027455001	107	92	4 ⁹ / ₃₂ "

Rack for Kraftform Micro screwdrivers



		
	mm	mm
05134002001	190,0	80



Rack for Kraftform screwdrivers



	mm	mm
05134001001	190,0	50,0

1440/1442 Screw gripper set



Application: Attachment with holding function for screws, holds all screw profiles and sizes securely on the tool, suitable for round and hexagon blades with a diameter from 4.5 mm to 6.0 mm and 6.0 mm to 8.5 mm

Construction: Elastomer

05073680001		
1440	1 x 4,5 - 6,0x41,0	
1442	1 x 6,0-8,5x41,0	

1441 Screw gripper attachment for screwdriver blades, long bits and L-keys, with holding function for screws



Application: Attachment with holding function for screws, holds all screw profiles and sizes securely on the tool, suitable for round and hexagon blades with a diameter from 4.5 mm to 6.0 mm


Design: Elastomer

	mm	mm
05073681001	4,5-6,0	41,0


And this is how the gripper works:



Push the screw gripper onto the tip of the screwdriver until the end of the blade protrudes from the rubber blade holder.




Attach the screw to the tip of the blade and secure it in the screw gripper.



Pull the screw gripper towards the screwdriver handle until the two arms of the gripper sit against the head of the screw and are spread slightly apart. The Wera screw gripper releases the screw automatically after it has been fastened.



The two gripper arms spread further apart as they are pushed against the surface and automatically snap back when the head of the screw is countersunk.



When fastening screws in blind holes the screw gripper is pushed back, making it possible to reach even deep-seated screws.



The screw gripper attachment can also be used with L-keys and long bits!


Kraftform Micro

Screwdriving jobs in electrical and precision engineering applications are often tedious and time-consuming.


We learned from users what is important for them: working speeds, torque, precision – and we then focused particularly on these issues.




The fast-turning zone just below the rotating cap allows rapid twisting.

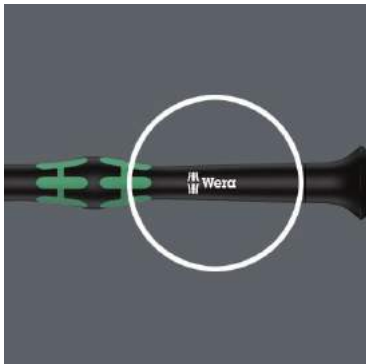


The power zone has integrated soft zones near the blade tip to ensure high torque transfer for loosening or tightening screws without losing contact with the screw.

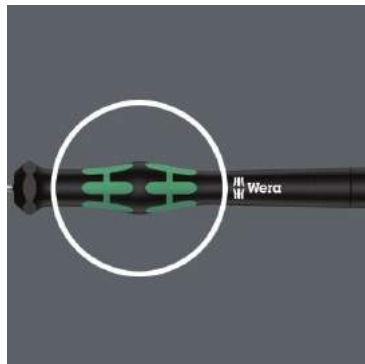

The precision zone directly above the blade gives the user a better feel for the right rotation angle during fine adjustment work.

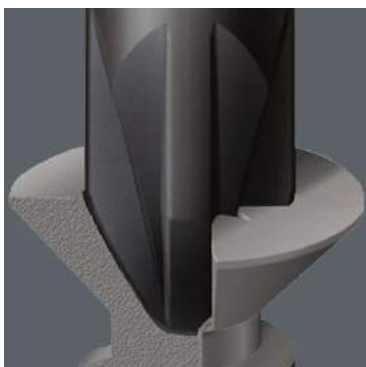

The Wera Black Point tip, as well as a refined hardening process, ensure long service life and enhanced corrosion protection.

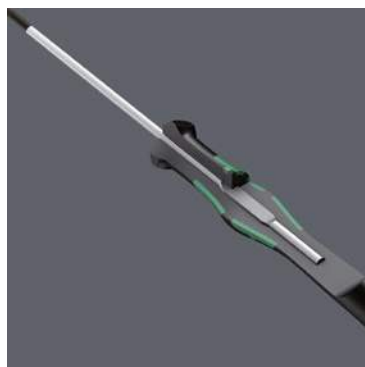

Multi-component screwdriver handle for ergonomic working.



Indispensable for many users, including electronics technicians, opticians, precision engineers, jewellers, EDP hardware fitters and model-makers.



Series Kraftform Micro

The refined screwdriver for electronics technicians

2035 Screwdriver for slotted screws for electronic applications



Application: Slotted screws
Blade: Round
Design: Chrome-plated, Black Point
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

							
	mm	mm	mm	mm	mm	mm	mm
05117990001	0,16	0,8	40	97	2,0	1/32"	1 9/16"
05117991001	0,18	1,0	40	97	2,0	0,04"	1 9/16"
05117992001	0,20	1,2	40	97	2,0	0,05"	1 9/16"
05118002001	0,23	1,5	40	97	2,0	1/16"	1 9/16"
05118003001	0,23	1,5	60	97	2,0	1/16"	2 3/8"
05118000001	0,25	1,2	40	97	2,0	0,05"	1 9/16"
05117993001	0,30	1,8	40	97	2,0	0,07"	1 9/16"
05118004001	0,30	1,8	60	97	2,0	0,07"	2 3/8"
05118017001	0,30	2,0	50	97	2,0	0,07"	2"
05118005001	0,40	2,0	40	97	2,5	5/64"	1 9/16"
05118006001	0,40	2,0	60	97	2,5	5/64"	2 3/8"
05118007001	0,40	2,0	100	97	2,5	5/64"	4"
05117994001	0,40	2,5	50	97	2,5	3/32"	2"
05118008001	0,40	2,5	80	97	2,5	3/32"	3 1/8"
05117995001	0,50	3,0	50	97	3,0	1/8"	2"
05118010001	0,50	3,0	80	97	3,0	1/8"	3 1/8"
05118012001	0,60	3,5	80	97	4,0	9/64"	3 1/8"
05118014001	0,80	4,0	80	97	4,0	5/32"	3 1/8"

2055 PZ Screwdriver for Pozidriv screws for electronic applications



Application: Suitable for Pozidriv screws
Blade: Round
Design: Chrome-plated, Black Point
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

					
	mm	mm	mm	mm	mm
05118030001	PZ 0	60	97	3,0	2 3/8"
05118032001	PZ 1	80	97	4,0	3 1/16"

2050 PH Screwdriver for Phillips screws for electronic applications



Application: Phillips screws
Blade: Round
Design: Chrome-plated, Black Point
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

					
	mm	mm	mm	mm	mm
05345290001	PH 000	40	97	1,5	1 9/16"
05345291001	PH 00	40	97	1,5	1 9/16"
05118019001	PH 00	40	97	2,5	1 9/16"
05118020001	PH 00	60	97	3,0	2 3/8"
05118022001	PH 0	60	97	3,0	2 3/8"
05118023001	PH 1	60	97	4,0	2 3/8"
05118024001	PH 1	80	97	4,0	3 1/8"

2067 TORX® HF screwdriver with holding function for electronic applications



Application: TORX® socket screws
Blade: Round
Design: Holding function for TORX® screws made according to Acument Global Technologies Inc. specifications, chrome-plated, Black Point
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

					
		mm	mm	mm	
05118180001	TX 4	40	97	2,5	1 ⁹ / ₁₆ "
05118181001	TX 5	40	97	3,0	1 ⁹ / ₁₆ "
05118182001	TX 6	40	97	3,0	1 ⁹ / ₁₆ "
05118183001	TX 7	60	97	3,0	2 ³ / ₈ "
05118184001	TX 8	60	97	3,0	2 ³ / ₈ "
05118185001	TX 9	60	97	4,0	2 ³ / ₈ "
05118186001	TX 10	60	97	4,0	2 ³ / ₈ "



2067 TORX® screwdriver for TORX® screws for electronic applications



Application: TORX® socket screws
Blade: Round
Design: Chrome-plated, Black Point
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

		mm	mm	mm	
05118035001	TX 1	40	97	2,0	1 9/16"
05118036001	TX 2	40	97	2,0	1 9/16"
05118037001	TX 3	40	97	2,0	1 9/16"
05118039001	TX 4	40	97	2,5	1 9/16"
05118040001	TX 5	40	97	3,0	1 9/16"
05118042001	TX 6	40	97	3,0	1 9/16"

2067 TORX® B0 screwdriver for tamper-proof TORX® screws for electronic applications



Application: TORX® socket screws with safety pin
 (B0 = with bore hole)
Blade: Round
Design: Bore hole in TORX® section, chrome-plated, Black Point
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

		mm	mm	mm	
05118044001	TX 7	60	97	3,0	1 9/16"
05118046001	TX 8	60	97	3,0	2 3/8"
05118048001	TX 9	60	97	4,0	2 3/8"
05118050001	TX 10	60	97	4,0	2 3/8"
05118052001	TX 15	60	97	4,0	2 3/8"
05118054001	TX 20	60	97	4,0	2 3/8"


Tip

How can I hold my TORX® screw securely on the screwdriver?



The electronic TORX® screwdriver with holding function (HF) literally presses the screw onto the screwdriver. The conical driving flanks that taper toward the tip of the tool, the optimised flank base and the ideal engage depth hold the screw securely on the blade.

How to perform precision screwdriving jobs quickly whilst still applying the required degree of force?



The Kraftform Micro, with its three zones and their specific arrangement, satisfies these requirements perfectly. The free-turning cap that provides support for the hand works with these advantages, enabling quick and easy precision work.

Series Kraftform Micro

The refined screwdriver for electronics technicians

2073 Five Lobe screwdriver for Five Lobe screws for electronic applications



Application: Five Lobe socket screws
Blade: Round
Design: Chrome-plated, Black Point
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

					
	# 1	44	97	2,0	1 47/64"

2054 Screwdriver for hexagon socket screws for electronic applications



Application: Hexagon socket screws
Blade: Round
Design: Hex-Plus, chrome-plated, Black Point
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

					
	mm	mm	mm	mm	mm
05118060001	0,7		40	97	3,0 1 9/16"
05118062001	0,9		40	97	3,0 1 9/16"
05118064001	1,3		40	97	3,0 1 9/16"
05118066001	1,5		60	97	3,0 2 3/8"
05118068001	2		60	97	3,0 2 3/8"
05118070001	2,5		60	97	4,0 2 3/8"
05118072001	3,0		60	97	4,0 2 3/8"
05345284001	-	0,028"	40	97	3,0 1 9/16"
05345285001	-	0,035"	40	97	3,0 1 9/16"
05118074001	-	0,05"	40	97	3,0 1 9/16"
05118076001	-	1/16"	60	97	3,0 2 3/8"
05118078001	-	5/64"	60	97	3,0 2 3/8"
05118080001	-	3/32"	60	97	4,0 2 3/8"
05118082001	-	7/64"	60	97	4,0 2 3/8"
05118075001	-	1/8"	60	97	4,0 2 3/8"

2052 Ball end hexagon screwdriver for electronic applications



Application: Hexagon socket screws
Blade: Round
Design: Hexagon ball end, chrome-plated, Black Point
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

					
	mm	mm	mm	mm	mm
05118089001	1,3		60	97	3,0 2 3/8"
05118090001	1,5		60	97	3,0 2 3/8"
05118092001	2,0		60	97	3,0 2 3/8"
05118094001	2,5		60	97	4,0 2 3/8"
05118096001	3,0		60	97	4,0 2 3/8"
05118098001	-	1/16"	60	97	3,0 2 3/8"
05118100001	-	5/64"	60	97	3,0 2 3/8"
05118102001	-	3/32"	60	97	3,0 2 3/8"
05118106001	-	7/64"	60	97	4,0 2 3/8"
05118103001	-	1/8"	60	97	4,0 2 3/8"




Tip

How to hold any screw securely on the screwdriver?



With the Wera magnetiser/demagnetiser: simply run the tool down the positive side of the Wera magnetiser/demagnetiser and the tool immediately becomes magnetised and is able to hold the screw securely on the blade.



To demagnetise the tool, simply run it down one of the four negative sides. See page 58.



Hexagon ball tip



The spherical drive profile means that it is possible to swivel the axis of the tool to that of the screw, and therefore enable angled, "around-the-corner" screw-driving jobs.

2069 Nutdriver for electronic applications



Application: Hexagon headed bolts, screws and nuts
Blade: Round
Design: Chrome-plated
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

						
	mm	mm	mm	mm	mm	mm
05118108001	1,5	60	97	4,0	2 3/8"	
05118109001	1,8	60	97	4,0	2 3/8"	
05118110001	2,0	60	97	4,0	2 3/8"	
05118112001	2,5	60	97	4,0	2 3/8"	
05118114001	3,0	60	97	5,0	2 3/8"	
05118116001	3,2	60	97	5,0	2 3/8"	
05118118001	3,5	60	97	5,3	2 3/8"	
05118120001	4,0	60	97	5,5	2 3/8"	
05118122001	4,5	60	97	6,2	2 3/8"	
05118124001	5,0	60	97	7,0	2 3/8"	
05118126001	5,5	60	97	7,8	2 3/8"	
05345281001	6,0	60	97	8,5	2 3/8"	
05118128001	-	3/32"	60	97	5,7	2 3/8"
05118130001	-	7/64"	60	97	5,7	2 3/8"
05118132001	-	1/8"	60	97	5,7	2 3/8"
05118134001	-	9/64"	60	97	5,7	2 3/8"
05118136001	-	5/32"	60	97	5,7	2 3/8"
05118135001	-	3/16"	60	97	-	2 3/8"
05118137001	-	7/32"	60	97	-	2 3/8"
05345282001	-	1/4"	60	97	8,5	2 3/8"

1429 Chip lifter




Application: Lifting tightly-fitting parts from circuit boards after desoldering
Blade: Round
Design: Chrome-plated
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

				
	mm	mm	mm	mm
05027456001	1,0	3,5	50	97

Series Kraftform Micro

The refined screwdriver for electronics technicians

1013 Kraftform Micro bitholding screwdriver



Application: Suitable for bits with 4 mm Halfmoon drive (and Wera Serie 9) and 4 mm HIOS drive (and Wera Series 21)

Design: With quick-release chuck for rapid bit change

Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

	mm	mm	"
05051276001	23	97	1"

Bits of the Wera serie 9 and 21 can be found on pages 285, 314, 320, 322, 327, 334, 346 and 347.

Kraftform Micro-Set/12 SB 1 Screwdriver set for electronic applications




Application: Slotted and Phillips screws, TORX® socket screws, and Hexagon socket screws

Content: 12-piece set, in a belt pouch

05073675001	
+	2050 PH Micro 1 x PH 00x60; 1 x PH 0x60
⊕	2067 TORX® 1 x TX 5x40; 1 x TX 6x40
⊖	2035 Micro 1 x 0,23x1,5x40; 1 x 0,30x1,8x60; 1 x 0,40x2,0x60; 1 x 0,40x2,5x80; 1 x 0,50x3,0x80
⊙	2054 Micro 1 x 0,9x40; 1 x 1,5x60; 1 x 2x60

Kraftform Kompakt Micro-Set/11 SB



Pouch with 44 mm bits

11-piece set

1 Kraftform Micro bitholding screwdriver 1013

05135938001	
⊖	1013 Kraftform Micro 1 x 97
⊕	851/9 C 1 x PH 00x44; 1 x PH 0x44; 1 x PH 1x44
⊙	851/9 C 1 x PH 00x44; 1 x PH 0x44; 1 x PH 1x44
⊖	840/9 C 1 x 1,5x44; 1 x 2,0x44
⊕	800/9 C 1 x 0,23x1,5x44; 1 x 0,40x2,0x44; 1 x 0,50x3,0x44
⊙	867/9 C TORX® 1 x TX 5x44; 1 x TX 6x44

2035/6 A Screwdriver set and rack for electronic applications



Application: Slotted and Phillips screws

Content: 6-piece set and rack in display carton

05118150001	
+	2050 PH Micro 1 x PH 00x60; 1 x PH 0x60
⊕	2035 Micro 1 x 0,30x1,8x60; 1 x 0,40x2,0x60; 1 x 0,40x2,5x80; 1 x 0,50x3,0x80



2035/6 B Screwdriver set and rack for electronic applications



Application: Slotted and Phillips screws
Content: 6-piece set and rack in display carton

05118152001	
	2050 PH Micro 1 x PH 0x60; 1 x PH 1x80
	2035 Micro 1 x 0,40x2,5x80; 1 x 0,50x3,0x80; 1 x 0,60x3,5x80; 1 x 0,80x4,0x80

2052/6 Hexagon screwdriver set and rack for electronic applications



Application: Ball end for hexagon socket screws
Content: 6-piece set and rack in display carton

05118156001	
	2052 Micro 1 x 1,5x60; 1 x 2,0x60; 1 x 2,5x60; 1 x 3,0x60
	2054 Micro 1 x 0,9x40; 1 x 1,3x40

2067/6 TORX® B0 screwdriver set and rack for electronic applications



Application: TORX® socket screws with safety pin (B0 = with bore hole)
Content: 6-piece set and rack in display carton

05118154001	
	2067 TORX® 1 x TX 7x60; 1 x TX 8x60; 1 x TX 9x60; B0 Micro 1 x TX 10x60; 1 x TX 15x60; 1 x TX 20x60

2069/6 Screwdriver set and rack for electronic applications



Application: Hexagon headed bolts, screws and nuts
Content: 6-piece set and rack in display carton

05118158001	
	2069 Micro 1 x 2,0x60; 1 x 2,5x60; 1 x 3,0x60; 1 x 3,5x60; 1 x 4,0x60; 1 x 5,0x60

Pouch for up to 12-piece sets Kraftform Kompakt Micro, empty




	mm	mm
05671385001	235	115

Screwdrivers with T-handle


The T-handle is useful whenever higher tightening or loosening torque need to be applied. The exclusive use of hard material in combination with the large contact surface area in the hand ensures an efficient, positive transfer of power.



The ergonomic design of the T-handle fills the palm of the hand. The fingers rest in the soft, rounded recess, and the whole hand is in contact with the handle – so there is no friction loss between the hand and handle.

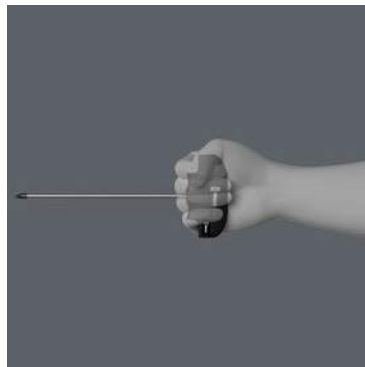

By using the blade as an extension of your lower arm you can transfer particularly high torque.

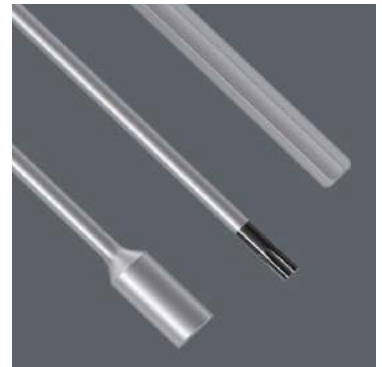


The blades are made out of special alloy steels for superior wear resistance and robustness.



Series 400 T-Handle

Ideal for high torque

454 T-handle hexdriver

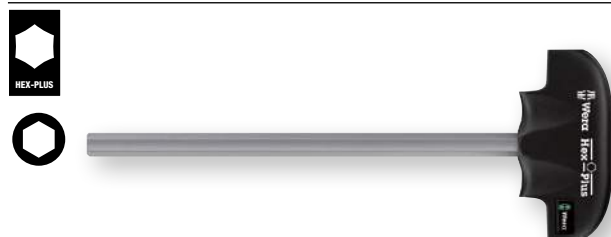

Application: Hexagon socket screws
Blade: Hexagon
Design: Hex-Plus, chamfered, chrome-plated
Handle: T-handle, single-component

					
		mm	mm	mm	
05013300001	2	100	27	61	4"
05013301001	2	200	27	61	8"
05013302001	2,5	100	27	61	4"
05013303001	2,5	200	27	61	8"
05013304001	3	100	33	70	4"
05013305001	3	150	33	70	6"
05013330001	3	200	33	70	8"
05013331001	3	350	33	70	14"
05013332001	4	100	33	70	4"
05013306001	4	150	33	70	6"
05013307001	4	200	33	70	8"
05013333001	4	350	33	70	14"
05013334001	5	100	44	87	4"
05013308001	5	150	44	87	6"
05013309001	5	200	44	87	8"
05013335001	5	350	44	87	18"
05013337001	6	100	44	87	4"
05013338001	6	150	44	87	6"
05013310001	6	200	44	87	8"
05013339001	6	350	44	87	14"
05013311001	7	200	44	87	8"
05013341001	8	150	44	87	6"
05013312001	8	200	44	87	8"
05013314001	10	200	44	87	8"

454 T-handle hexdriver, imperial



Application: Hexagon socket screws
Blade: Hexagon
Design: Hex-Plus, chamfered, chrome-plated
Handle: T-handle, single-component

					
		mm	mm	mm	
05344536001	$\frac{3}{32}$ "	100	27	61	4"
05344537001	$\frac{7}{64}$ "	100	27	61	4"
05344538001	$\frac{1}{8}$ "	100	33	70	4"
05344546001	$\frac{9}{64}$ "	150	33	70	6"
05344545001	$\frac{5}{32}$ "	150	33	70	6"
05344544001	$\frac{3}{16}$ "	150	44	87	6"
05344543001	$\frac{7}{32}$ "	150	44	87	6"
05344542001	$\frac{1}{4}$ "	200	44	87	8"
05344541001	$\frac{5}{16}$ "	200	44	87	8"
05344540001	$\frac{3}{8}$ "	200	44	87	8"

467 T-handle TORX® driver



Application: TORX® screws
Blade: Round
Design: Chrome-plated, Black Point
Handle: T-handle, single-component

						
		mm	mm	mm		mm
05013350001	TX 6	100	27	61	4"	3,0
05013352001	TX 7	100	27	61	4"	3,0
05013354001	TX 8	100	27	61	4"	3,5
05013356001	TX 9	100	27	61	4"	3,5
05013358001	TX 10	100	27	61	4"	4,0
05013360001	TX 15	100	33	70	4"	4,0
05013362001	TX 20	100	33	70	4"	4,5
05013364001	TX 20	200	33	70	8"	4,5
05013366001	TX 25	100	33	70	4"	5,0
05013368001	TX 25	200	33	70	8"	5,0
05013370001	TX 27	200	44	87	8"	6,0
05013372001	TX 30	200	44	87	8"	6,0
05013374001	TX 40	200	44	87	8"	8,0
05013376001	TX 45	200	44	87	8"	9,0



495 T-handle nutspinner



Application: Hexagon headed bolts, screws and nuts

Blade: Round

Design: Hexagonal, chrome-plated

Handle: T-handle, single-component

		mm	mm	mm	mm	mm
05013400001	5	230	33	70	9"	8,1
05013399001	5,5	230	33	70	9"	8,1
05013401001	6	230	33	70	9"	9,1
05013402001	7	230	44	87	9"	11,0
05013403001	8	230	44	87	9"	12,1
05013404001	9	230	44	87	9"	13,1
05013405001	10	230	44	87	9"	14,1
05013407001	11	230	44	87	9"	16,0
05013409001	12	230	44	87	9"	17,1
05013411001	13	230	44	87	9"	18,1

489 R T-handle Rapidaptor




Application: Suitable for 1/4" DIN ISO 1173 C 6,3 and 6,3 hexagon insert bits und Wera Series 1 and 4

Drive: 1/4" hexagon with Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology, magnetic

Handle: T-handle, multi-component

		mm	mm	mm	mm
05013390001	1/4"	45	44	87	1 25/32"

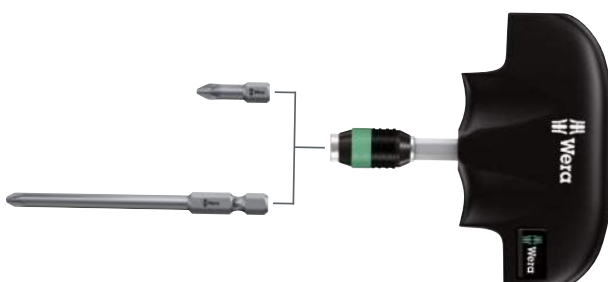

Rapidaptor

Rapid-in und self-lock



The bit can be pushed into the adaptor without moving the sleeve. The lock is activated automatically as soon as the bit is applied to the screw. Bits are held securely and wobble-free.

Rapid-out



Simply push the sleeve forward to change the bit. The spring mechanism lifts the bit off the magnet and unlocks the tool. The bit can be easily removed. The rapid-out function makes it easy to remove even the smallest bits without extra tools.

Chuck-all



The Rapidaptor quick-release chucks hold 1/4" DIN ISO 1173 C 6,3 and 6,3 as well as Wera series 1 and 4 bits.

Single-hand function



Every function of the Rapidaptor quick-release chuck, such as inserting or releasing bits, can be carried out with one hand. This is faster, more economical and more ergonomic. There are no unnecessary manoeuvres.





VDE Tools

	Kraftform Stainless VDE	74
	Kraftform Series 100 VDE	78
	Kraftform Kompakt VDE	92
	Kraftform Comfort VDE	104

Kraftform Stainless Screwdrivers VDE

Why are stainless elements so often affected by rust? One reason: screwdriving jobs are often carried out with a tool out of made from conventional steel which can result in extraneous rust forming. This is annoying. We were confident that this could be prevented by using tools likewise out of stainless steel and meeting the required standard of industrial hardness.

A tool series out of stainless steel. The forming of extraneous rust is prevented and a special vacuum ice-hardening process ensures the required degree of hardness – and they are even VDE-tested, too.



Solution to the rust problem: screw stainless steel together with stainless steel! Wera stainless steel tools are manufactured out of stainless steel so unsightly rust can be avoided.



The stainless steel tools from Wera are vacuum ice-hardened and have the hardness and strength needed for screw connections. There are no limitations to the industrial applications they are suitable for.



A precisely-focused laser creates a sharp-edged surface structure. This laser treatment results in an edge hardness of up to 1000 HV 0.3. Wera Lasertip "bites" itself into the screw head and prevents any slips out of the recess. It is available for screwdrivers for slotted, Phillips and Pozidriv screws.



Wera Lasertip reduces the contact pressure required and enhances force transfer – meaning less screwdriving effort is required. Screwdriving becomes safer and easier.



The outstanding design of the Kraftform handle that fits perfectly into the hand prevents hand injuries such as blisters and calluses.



The hard materials used for the handle ensure rapid hand repositioning without any danger of the skin “sticking” to the handle. The surrounding hard zones with large diameters glide like wheels across the hand.



The screw symbol and tip size identification markings on the handle make it easier to find the right screwdriver in the tool case or at the workplace.



The hexagonal non-roll feature prevents any rolling away at the workplace.

Series Kraftform Screwdrivers

Stainless Steel VDE

3160 i VDE Insulated Screwdriver for slotted screws, stainless



Application: Slotted screws

Blade: Insulated, individually tested as per IEC 60900

Design: Conical edge, Lasertip, stainless steel for minimising rust

Handle: Kraftform with non-roll feature, multi-component

	mm	mm	mm	mm		
05022729001 ¹⁾	0,5	3,0	80	81	1/8"	3 1/8"
05022730001	0,6	3,5	100	81	9/64"	4"
05022731001	0,8	4,0	100	98	5/32"	4"
05022732001	1,0	5,5	125	98	7/32"	5"

¹⁾ without Lasertip

3165 i PZ VDE Insulated screwdriver for Pozidriv screws, stainless



Application: Suitable for Pozidriv screws

Blade: Insulated, individually tested as per IEC 60900

Design: Lasertip

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	
05022740001	PZ 1	80	98	3 1/8"
05022741001	PZ 2	100	105	4"

3162 i PH VDE Insulated screwdriver for Phillips screws, stainless



Application: Phillips screws

Blade: Insulated, individually tested as per IEC 60900

Design: Lasertip, stainless steel for minimising rust

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	
05022733001	PH 1	80	98	3 1/8"
05022734001	PH 2	100	105	4"

3160 i/7 Screwdriver set, stainless and rack



Kraftform stainless: the safety screwdriver for stainless steel screws, Lasertip blade + voltage tester + rack

Application: Slotted and Phillips screws

Contents: Stainless steel, 7-piece set and rack in display carton

05022728001	
⊖	3247 1 x 0,5x3,0x70
⊕	3162 i VDE 1 x PH 1x80; 1 x PH 2x100
⊖	3160 i VDE 1 x 0,5x3,0x80 ¹⁾ ; 1 x 0,6x3,5x100; 1 x 0,8x4,0x100; 1 x 1,0x5,5x125

¹⁾ without Lasertip
Product not available in the USA and Canada.

3165 i/6 Screwdriver set, stainless and rack



Kraftform stainless: the safety screwdriver for stainless steel screws, Lasertip blade + rack

Application: Slotted and Pozidriv screws

Contents: Stainless steel, 6-piece set and rack in display carton

05022745001	
⊕	3165 i PZ VDE 1 x PZ 1x80; 1 x PZ 2x100
⊖	3160 i VDE 1 x 0,5x3,0x80 ¹⁾ ; 1 x 0,6x3,5x100; 1 x 0,8x4,0x100; 1 x 1,0x5,5x125

¹⁾ without Lasertip

Kraftform Screwdrivers


Series 100 VDE

We want our users to be able to work safely and conveniently.

So we have now transferred the advantages of the Kraftform Plus technology into the VDE segment.



The individual testing in a water bath at 10,000 volts, in accordance with DIN EN 60900 (IEC 60900), ensures safe working with loads up to 1,000 volts.

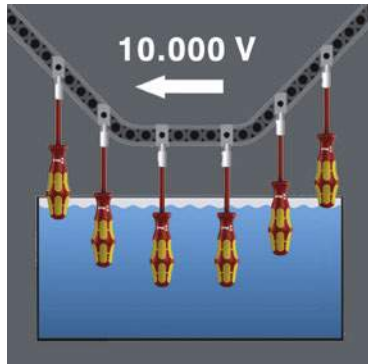

Impact strength tested at -40°C, guaranteeing safety even under extreme conditions.



The outstanding design of the Kraftform handle ensures that it fits perfectly into the hand, preventing hand injuries such as blisters and calluses.




The hard materials used for the handle ensure rapid hand repositioning, without any danger of the skin "sticking" to the handle. The softer "anti-slip" zones enable the low-loss transfer of high forces – resulting in less screwdriving effort being required.



A precisely-focused laser creates a sharp-edged surface structure. This laser treatment results in an edge hardness of up to 1000 HV 0.3. Wera Lasertip "bites" itself into the screw head and prevents any slips out of the recess. It is available for screwdrivers for slotted, Phillips and Pozidriv screws.



The screw symbol and tip size identification markings on the handle make it easier to find the right screwdriver in the tool case or at the workplace.

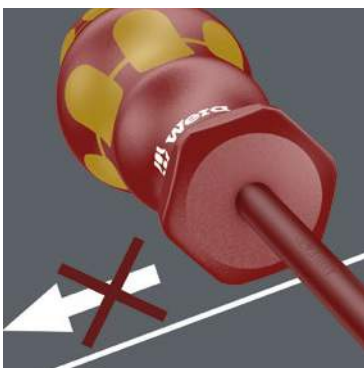

The hexagonal non-roll feature prevents any annoying rolling away at the workplace.

Kraftform Plus – Series 100 VDE

The safety screwdriver for working with live wiring

160 i VDE Insulated screwdriver for slotted screws



Application: Slotted screws

Blade: Insulated, individually tested as per IEC 60900

Design: Conical tip, Lasertip

Handle: Kraftform with non-roll feature, multi-component

						
	mm	mm	mm	mm	"	"
05006100001 ¹⁾	0,4	2,5	80	81	$\frac{3}{32}$ "	$3\frac{1}{8}$ "
05006105001 ¹⁾	0,5	3,0	100	81	$\frac{1}{8}$ "	4"
05006110001	0,6	3,5	100	81	$\frac{9}{64}$ "	4"
05006115001	0,8	4,0	100	98	$\frac{5}{32}$ "	4"
05006116001	0,8	4,0	150	98	$\frac{5}{32}$ "	6"
05006120001	1,0	5,5	125	98	$\frac{7}{32}$ "	5"
05006121001	1,0	5,5	200	98	$\frac{7}{32}$ "	8"
05006125001	1,2	6,5	150	105	$\frac{1}{4}$ "	6"
05006126001	1,2	6,5	200	105	$\frac{1}{4}$ "	8"
05006130001	1,2	8,0	175	112	$\frac{5}{16}$ "	7"
05006135001	1,6	8,0	200	112	$\frac{5}{16}$ "	8"
05006140001	1,6	10,0	200	112	$\frac{3}{8}$ "	8"

¹⁾ without Lasertip

160 iS VDE Insulated screwdriver with reduced blade diameter for slotted screws



Application: Slotted screws and actuating tool for spring terminals

Blade: Reduced blade diameter with integrated protective insulation, allows sunken screws and spring elements to be accessed and actuated, individually tested as per IEC 60900

Design: Conical blade, zinc-phosphated

Handle: Kraftform with non-roll feature, multi-component

						
	mm	mm	mm	mm	"	"
05006440001	0,6	3,5	100	81	$\frac{9}{64}$ "	4"
05006441001	0,8	4,0	100	98	$\frac{5}{32}$ "	4"
05006442001	1,0	5,5	125	98	$\frac{7}{32}$ "	5"

160 iSS VDE Insulated screwdriver with reduced blade diameter for slotted screws



Application: Slotted screws and actuating tool for spring terminals

Blade: Reduced blade diameter with integrated protective insulation, allows sunken screws and spring elements to be accessed and actuated, individually tested as per IEC 60900

Design: Conical blade, zinc-phosphated

Handle: Kraftform with non-roll feature, multi-component

						
	mm	mm	mm	mm	"	"
05020129001	0,8	4,0	100	81	$\frac{5}{32}$ "	4"

160 i SB VDE Insulated screwdriver for slotted screws

		
		4013288
05100000001	1 x 0.4x2.5x80 ¹⁾	181466
05100001001	1 x 0.5x3.0x100 ¹⁾	181473
05100002001	1 x 0.6x3.5x100	181480
05100003001	1 x 0.8x4.0x100	181497
05100004001	1 x 1.0x5.5x125	181503



162 i PH VDE Insulated screwdriver for Phillips screws



Application: Phillips screws

Blade: Insulated, individually tested as per IEC 60900

Design: Lasertip

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	"
05006150001 ¹⁾	PH 0	80	81	3 1/8"
05006152001	PH 1	80	98	3 1/8"
05006153001	PH 1	150	98	6"
05006154001	PH 2	100	105	4"
05006159001	PH 2	200	105	8"
05006156001	PH 3	150	112	6"
05006158001 ¹⁾	PH 4	200	112	8"

¹⁾ without Lasertip

162 i PH SB VDE Insulated screwdriver for Phillips screws




4013288

05100011001		1 x PH 1x80	181442
05100012001		1 x PH 2x100	181459



Tip

VDE-insulated screwdriver with reduced blade diameter



Reduced blade diameter with integrated protective insulation, allows sunken screws and spring elements to be accessed and actuated, individually tested as per IEC 60900.



How to prevent the screwdriver from slipping out of the screw head?



It happens time and time again that the tip slips out of the screw head when screwdriving, sometimes damaging valuable surfaces or even causing injury. The tips of the Wera Lasertip screwdrivers are microscopically roughened by means of a laser. This rough surface literally "bites" itself firmly into the screw head. Slipping out becomes a thing of the past.

Kraftform Plus – Series 100 VDE

The safety screwdriver for working with live wiring

162 iS PH VDE Insulated screwdriver with reduced blade diameter for Phillips screws



Application: Phillips screws

Blade: Reduced blade diameter with integrated protective insulation, allows sunken PH screws to be accessed and actuated, individually tested as per IEC 60900

Design: Blade zinc-phosphated

Handle: Kraftform with non-roll feature, multi-component

				
		mm	mm	"
05006450001	PH 1	80	98	3 1/8"
05006451001	PH 2	100	105	4"

165 i PZ VDE Insulated screwdriver for Pozidriv screws



Application: Suitable for Pozidriv screws

Blade: Insulated, individually tested as per IEC 60900

Design: Lasertip

Handle: Kraftform with non-roll feature, multi-component

				
		mm	mm	"
05006160001 ¹⁾	PZ 0	80	81	3 1/8"
05006162001	PZ 1	80	98	3 1/8"
05006163001	PZ 1	150	98	6"
05006164001	PZ 2	100	105	4"
05006165001	PZ 2	200	105	8"
05006166001	PZ 3	150	112	6"
05006168001 ¹⁾	PZ 4	200	112	8"

¹⁾ without Lasertip

162 iSS PH VDE Insulated screwdriver with reduced blade diameter for Phillips screws



Application: Phillips screws

Blade: Reduced blade diameter with integrated protective insulation, allows sunken PH screws to be accessed and actuated, individually tested as per IEC 60900

Design: Blade zinc-phosphated

Handle: Kraftform with non-roll feature, multi-component

				
		mm	mm	"
05020131001	PH 1	80	98	3 1/8"
05020133001	PH 2	100	105	4"

165 i PZ SB VDE Insulated screwdriver for Pozidriv screws

			
05100015001	1 x PZ 1x80	181510	4013288
05100016001	1 x PZ 2x100	181527	



165 iS PZ VDE Insulated screwdriver with reduced blade diameter for Pozidriv screws



Application: Suitable for Pozidriv screws

Blade: Reduced blade diameter with integrated protective insulation, allows sunken PZ screws to be accessed and actuated, individually tested as per IEC 60900

Design: Blade zinc-phosphated

Handle: Kraftform with non-roll feature, multi-component

		 mm	 mm	 "
05006460001	PZ 1	80	98	3 1/8"
05006461001	PZ 2	100	105	4"

162 i PH/S VDE Insulated screwdriver for PlusMinus screws (Phillips/slotted)



Application: PlusMinus screws (Phillips/slotted)

Blade: Insulated, individually tested as per IEC 60900

Design: PlusMinus (Phillips/slotted)

Handle: Kraftform with non-roll feature, multi-component

		 mm	 mm	 "
05006380001	# 1	80	98	3 1/8"
05006381001	# 2	100	105	4"

Tip

How to find the correct screwdriver quickly?



All Kraftform Plus screwdrivers are marked with their drive profile and size. This enables faster and more reliable selection of the correct tool from the tool case.




PlusMinus screwdrivers



For the use in terminal blocks, control cabinets, switches, relays, sockets etc.

Non-roll feature



All Kraftform screwdrivers have a non-roll feature at the lower end of the handle. The hexagonal design prevents any annoying rolling away of the screwdriver at the workplace.

Kraftform Plus – Series 100 VDE

The safety screwdriver for working with live wiring

162 iS PH/S VDE Insulated screwdriver with reduced blade diameter for PlusMinus screws (Phillips/slotted)



Application: PlusMinus screws (Phillips/slotted)

Blade: Reduced blade diameter with integrated protective insulation, allows sunken PlusMinus screws to be accessed and actuated, individually tested as per IEC 60900

Design: Combination profile Phillips/slotted, blade zinc-phosphated

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	
05006455001	# 1	80	98	3 1/8"
05006456001	# 2	100	105	4"

165 iS PZ/S VDE Insulated screwdriver with reduced blade diameter for PlusMinus screws (Pozidriv/slotted)



Application: For PlusMinus screws (Pozidriv/slotted)

Blade: Reduced blade diameter with integrated protective insulation, allows sunken PlusMinus screws to be accessed and actuated, individually tested as per IEC 60900

Design: PlusMinus (Pozidriv/slotted), blade zinc-phosphated

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	
05006465001	# 1	80	98	3 1/8"
05006466001	# 2	100	105	4"

165 i PZ/S VDE Insulated screwdriver for PlusMinus screws (Pozidriv/slotted)



Application: For PlusMinus screws (Pozidriv/slotted)

Blade: Insulated, individually tested as per IEC 60900

Design: PlusMinus (Pozidriv/slotted)

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	
05006190001	# 1	80	98	3 1/8"
05006191001	# 2	100	105	4"

165 iSS PZ/S VDE Insulated screwdriver with reduced blade diameter for PlusMinus screws (Pozidriv/slotted)



Application: For PlusMinus screws (Pozidriv/slotted)

Blade: Reduced blade diameter with integrated protective insulation, allows sunken PlusMinus screws to be accessed and actuated, individually tested as per IEC 60900

Design: PlusMinus (Pozidriv/slotted), blade zinc-phosphated

Handle: Kraftform with non-roll feature, multi-component

		mm	mm	
05020132001	# 1	80	81	3 1/8"
05020134001	# 2	100	98	4"

167 i VDE Insulated screwdriver for TORX® screws



Application: TORX® socket screws

Blade: Insulated, individually tested as per IEC 60900

Design: Zinc-phosphated

Handle: Kraftform with non-roll feature, multi-component

				
		mm	mm	
05006181001	TX 5	80	81	3 1/8"
05006182001	TX 6	80	81	3 1/8"
05006183001	TX 7	80	81	3 1/8"
05006184001	TX 8	80	81	3 1/8"
05006169001	TX 9	80	81	3 1/8"
05006170001	TX 10	80	81	3 1/8"
05006172001	TX 15	80	98	3 1/8"
05006174001	TX 20	80	98	3 1/8"
05006176001	TX 25	100	105	4"
05006177001	TX 27	100	105	4"
05006178001	TX 30	100	105	4"
05006179001	TX 40	150	112	6"
05006186001	TX 45	150	112	6"

164 i VDE Insulated screwdriver for hexagon socket screws



Application: Hexagon socket screws

Blade: Insulated, individually tested as per IEC 60900

Design: Zinc-phosphated

Handle: Kraftform with non-roll feature, multi-component

				
	mm	mm	mm	
05004650001	2,5	80	98	3 1/8"
05004655001	3,0	80	98	3 1/8"
05004660001	4,0	80	98	3 1/8"
05004665001	5,0	80	105	3 1/8"
05004670001	6,0	100	105	4"
05004675001	8,0	100	112	4"

Tip

"Tested for dielectric strength"



Our screwdrivers are tested for dielectric strength under a 10,000 volt load in a water bath to make sure that their most important property, their insulation, has been exhaustively tested. Each individual Wera VDE screwdriver is subjected to this test to guarantee safe working up to 1,000 volts.



The super slim VDE screwdrivers



The super slim VDE screwdrivers for installation jobs in particularly confined spaces. Not only do the blades have a reduced diameter, the handles also have a very slim design.



Kraftform Plus – Series 100 VDE

The safety screwdriver for working with live wiring

168 i VDE Insulated screwdriver for square socket head screws



Application: Square socket head screws

Blade: Insulated, individually tested as per IEC 60900

Design: Zinc-phosphated

Handle: Kraftform with non-roll feature, multi-component

			 mm	 mm	 "
05004780001		# 1	80	98	3 1/8"
05004783001		# 1	150	98	6"
05004781001		# 2	100	105	4"
05004784001		# 2	200	105	8"
05004782001		# 3	150	112	6"

168 i SB VDE Insulated screwdriver for square socket head screws

		
		4013288
05100024001	 1 x # 1x80	181534
05100025001	 1 x # 2x100	181541
05100026001	 1 x # 3x150	181558



190 i VDE Insulated nutdriver



Application: Hexagon headed bolts, screws and nuts

Blade: Insulated, individually inspected as per IEC 60900

Design: Zinc-phosphated

Handle: Kraftform with non-roll feature, multi-component

						
	mm	mm	mm	mm	mm	"
05005300001	5,5	125	98	11,0	5"	
05005305001	6,0	125	98	12,0	5"	
05005310001	7,0	125	105	14,0	5"	
05005315001	8,0	125	105	15,0	5"	
05005320001	9,0	125	105	16,0	5"	
05005325001	10,0	125	112	17,0	5"	
05005330001	11,0	125	112	19,0	5"	
05005335001	12,0	125	112	20,0	5"	
05005340001	13,0	125	112	21,0	5"	
05104900001	-	3/16"	125	98	11,0	5"
05345280001	-	7/32"	125	98	12,0	5"
05104905001	-	1/4"	125	98	13,0	5"
05104901001	-	5/16"	125	105	15,0	5"
05104906001	-	3/8"	125	105	17,0	5"
05104902001	-	7/16"	125	112	19,0	5"
05104904001	-	1/2"	125	112	21,0	5"
05104903001	-	9/16"	125	112	23,0	5"
05104907001	-	5/8"	125	112	25,0	5"

247 Single-pole voltage tester



Application: Voltage testing
Standard: ISO 57680/6 and VDE 0680/6 for 150 to 250 V


	 mm	 mm	 mm	 mm	 mm	 mm
05005655001	0,5	3,0	70	3,0	1/8"	2 3/4"

Product not available in the USA and Canada.

247 SB Single-pole voltage tester

	 4013288
05100100001	1 x 0.5x3.0x70 181664

Product not available in the USA and Canada.



Tip



Why is the Kraftform Plus handle made out of several components?



Wera produces the Kraftform handle out of several materials with different properties. A resistant plastic is used for the core which ensures that the blade is held securely even under high strain. A softer material is used for the coloured soft zones, which provides high frictional resistance and allows the transfer of high forces – resulting in less required screwdriving effort. The red sections with their hard surfaces prevent any “sticking” of the hand to the handle, making rapid repositioning of the hand possible.



Kraftform Plus – Series 100 VDE

The safety screwdriver for working with live wiring

Kraftform Big Pack 100 VDE



Kraftform: The safety screwdriver with Lasertip blade, voltage tester and rack

Application: Slotted, Phillips, PlusMinus (Pozidriv/slotted), Pozidriv and TORX® screws

Content: 14-piece set in display carton

05105631001	
⊕	162 i PH VDE 1 x PH 1x80; 1 x PH 2x100
⊕	165 i PZ VDE 1 x PZ 1x80; 1 x PZ 2x100
⊕	165 i PZ/S VDE 1 x # 1x80; 1 x # 2x100
⊕	167 i TORX® VDE 1 x TX 10x80; 1 x TX 15x80; 1 x TX 20x80
⊖	160 iS 1 x 0,6x3,5x100
⊖	160 i VDE 1 x 0,4x2,5x80 ¹⁾ ; 1 x 0,8x4,0x100; 1 x 1,0x5,5x125
⊖	247 1 x 0,5x3,0x70
	Rack 2 x 190,0x50,0

¹⁾ without Lasertip
Product not available in the USA and Canada.

160 i/6 Rack Screwdriver Set Kraftform Plus Series 100 + Rack



Kraftform: The safety screwdriver.

Lasertip blade + rack
For slotted and Phillips screws

Application: For slotted and Phillips screws

Content: 6-pieces set and rack in display carton

05006145001	
⊕	162 i PH VDE 1 x PH 1x80; 1 x PH 2x100
⊖	160 i VDE 1 x 0,4x2,5x80 ¹⁾ ; 1 x 0,6x3,5x100; 1 x 0,8x4,0x100; 1 x 1,0x5,5x125

¹⁾ without Lasertip

160 i/7 Rack screwdriver set Kraftform Plus Series 100, voltage tester and rack



Kraftform: The safety screwdriver with Lasertip blade, voltage tester and rack

Application: Slotted and Phillips screws

Content: 7-piece set and rack in display carton

05006147001	
	162 i PH VDE 1 x PH 1x80; 1 x PH 2x100
	160 i VDE 1 x 0,4x2,5x80 ¹⁾ ; 1 x 0,6x3,5x100; 1 x 0,8x4,0x100; 1 x 1,0x5,5x125
	247 1 x 0,5x3,0x70

¹⁾ without Lasertip
Product not available in the USA and Canada.

160 i/165 i/7 Rack screwdriver set Kraftform Plus Series 100, voltage tester and rack



Kraftform: The safety screwdriver with Lasertip blade, voltage tester and rack

Application: Slotted and Pozidriv screws

Content: 7-piece set and rack in display carton

05006148001	
	165 i PZ VDE 1 x PZ 1x80; 1 x PZ 2x100
	160 i VDE 1 x 0,4x2,5x80 ¹⁾ ; 1 x 0,6x3,5x100; 1 x 0,8x4,0x100; 1 x 1,0x5,5x125
	247 1 x 0,5x3,0x70

¹⁾ without Lasertip
Product not available in the USA and Canada.

167 i/6 Screwdriver set Kraftform Plus Series 100



Kraftform: The safety screwdriver

Application: TORX® socket screws

Content: 6-piece set

05133356001	
	167 i TORX® VDE 1 x TX 8x80; 1 x TX 9x80; 1 x TX 10x80; 1 x TX 15x80; 1 x TX 20x80; 1 x TX 25x100

Kraftform Plus – Series 100 VDE

The safety screwdriver for working with live wiring

160 iS/7 Rack screwdriver set Kraftform Plus Series 100, voltage tester and rack. With reduced blade diameter



Kraftform: The safety screwdriver. With reduced blade diameter, voltage tester and rack

Application: Slotted, Phillips, PlusMinus screws (Pozidriv/slotted)

Content: 7-piece set and rack in display carton

05006480001		
⊕	162 iS	1 x PH 1x80; 1 x PH 2x100
⊕	165 iS PZ/S	1 x # 2x100
⊖	160 iS	1 x 0,6x3,5x100; 1 x 0,8x4,0x100; 1 x 1,0x5,5x125
⊖	247	1 x 0,5x3,0x70

Product not available in the USA and Canada.

160 i/168 i/6 Rack Screwdriver set Kraftform Plus Series 100 + Rack



Kraftform: The safety screwdriver. Lasertip blade + rack

Application: For slotted, Phillips and square socket screws

Content: 6-pieces set and rack in display carton

05347777001		
⊕	162 i PH VDE	1 x PH 1x80; 1 x PH 2x100
⊖	160 i VDE	1 x 0,6x3,5x100; 1 x 1,0x5,5x125
⊖	168 i VDE	1 x # 1x80; 1 x # 2x100

160 iSS/7 screwdriver set Kraftform Plus Series 100.
With reduced blade diameter and smaller handle diameters



Kraftform: The safety screwdriver. With reduced blade diameter and partially smaller handle diameters

Application: Slotted, Phillips, PlusMinus screws (Pozidriv/slotted)

Content: 7-piece set

05135961001	
	160 iSS 1 x 0,8x4,0x100
	160 iS 1 x 0,6x3,5x100; 1 x 1,0x5,5x125
	162 iSS 1 x PH 1x80; 1 x PH 2x100
	165 iSS PZ/S 1 x # 1x80; 1 x # 2x100

160 i/162 i/167 i/9 Screwdriver set Kraftform Plus Series 100



Kraftform: The safety screwdriver

Application: Slotted, Phillips, Pozidriv, PlusMinus (Pozidriv/slotted) and TORX® socket screws

Content: 9-piece set

05133355001	
	162 i PH VDE 1 x PH 2x100
	165 i PZ VDE 1 x PZ 2x100
	165 i PZ/S 1 x # 1x80; 1 x # 2x100 VDE
	167 i TORX® 1 x TX 15x80; 1 x TX 20x80; 1 x TX 25x100 VDE
	160 i VDE 1 x 0,4x2,5x80 ¹⁾ ; 1 x 1,0x5,5x125

¹⁾ without Lasertip



Kraftform Kompakt VDE

Why is the right tool so often missing at the workplace? The reason: too many tools and overly-heavy tool bags can make it bothersome to carry keep them with you.

So for us it was a clear challenge: to develop a tool that is suitable for a whole host of applications and can be easily taken along to the workplace.

Our solution: Kraftform Kompakt tools. A handle into which blades with a range of different profiles can be inserted. Compactly and protectively housed in a light and robust textile pouch – and they are even VDE-tested, too.



Kraftform Kompakt VDE sets come with an insulated handle and insulated interchangeable blades, that can be exchanged without any special tools.



The handle/interchangeable blade system allows rapid exchange of the blades required for a wide range of applications.



Each Kraftform Kompakt VDE set has been tested individually in a water bath at 10,000 volts, in accordance with DIN EN 60900 (IEC 60900). This ten-times-higher testing load guarantees safe working at their maximum permitted load of 1,000 volts.



The tools can be stored and carried in a robust belt pouch, keeping them always to hand.

Kraftform Kompakt VDE

Versatile tools for work on live wiring

Kraftform Kompakt VDE Torque 1.2 - 3.0 Nm



1 Series 7400 VDE Kraftform adjustable torque handle (1.2 - 3.0 Nm) for Wera VDE interchangeable blades only

VDE interchangeable blades (each 154 mm long) with reduced blade diameter (articles KK 60 i 0,4x2,5 and KK 67 i TX 10 conventional diameter) with integrated protective insulation, allows sunken screws and spring elements to be accessed and actuated

15-piece set

05059291001	
●	7400 VDE 1 x 7441 VDEx1,2-3,0
⊕	KK 62 iS 1 x PH 1x154; 1 x PH 2x154
⊕	KK 65 iS PZ 1 x PZ 1x154; 1 x PZ 2x154
⊕	KK 65 iS PZ/S 1 x # 1x154; 1 x # 2x154
⊕	KK 67 i TORX® 1 x TX 10x154
⊕	KK 67 iS 1 x TX 15x154; 1 x TX 20x154; 1 x TX 25x154
●	KK 60 i 1 x 0,4x2,5x154
●	KK 60 iS 1 x 0,6x3,5x154; 1 x 0,8x4,0x154; 1 x 1,0x5,5x154

Kraftform Kompakt VDE 60 i/62 i/65 i/247/18



1x Kraftform handle 817 VDE for Wera VDE interchangeable blades only

VDE interchangeable blades (each 154 mm long)

Single-pole voltage tester

18-piece set

05003471001	
●	817 VDE 1 x 9x102
⊕	KK 62 i 1 x PH 1x154; 1 x PH 2x154
⊕	KK 62 i PH/S 1 x # 1x154; 1 x # 2x154
⊕	KK 65 i PZ 1 x PZ 1x154; 1 x PZ 2x154
⊕	KK 65 i PZ/S 1 x # 1x154; 1 x # 2x154
●	KK 60 i 1 x 0,4x2,5x154; 1 x 0,6x3,5x154; 1 x 0,8x4,0x154; 1 x 1,0x5,5x154
●	KK 96 VK 6,3 1 x 6,3x89
●	KK 97 VK 8,1 1 x 8,1x89
▲	KK 98 DK 1 x 89
●	KK 99 FL 1 x 89
●	247 1 x 0,5x3,0x70

Product not available in the USA and Canada.



VDE interchangeable blades (154 mm long)

18-piece set

		
05347108001		
	817 VDE	2 x 9x102
	KK 62 i	1 x PH 1x154; 1 x PH 2x154
	KK 62 i PH/S	1 x # 1x154; 1 x # 2x154
	KK 65 i PZ/S	1 x # 1x154; 1 x # 2x154
	KK 60 i	1 x 0,4x2,5x154; 1 x 0,6x3,5x154; 1 x 0,8x4,0x154; 1 x 1,0x5,5x154
	KK 68 i	1 x # 1x154; 1 x # 2x154
	KK 96 VK 6,3	1 x 6,3x89
	KK 97 VK 8,1	1 x 8,1x89
	KK 98 DK	1 x 89
	KK 99 FL	1 x 89





Tip



Kraftform VDE adjustable torque handle



Simple setting of the required torque by hand. Easy-to-read scale value. Measurement accuracy is $\pm 6\%$ in accordance with the standard EN ISO 6789. Distinctly audible and noticeable excess-load signal when the pre-set torque is reached.



One handle – many interchangeable blades



The system "one handle – many interchangeable blades" makes Krafftform Kompakt VDE compact screwdriving sets for in-house as well as mobile electrical applications out of the sets. The belt pouch is practical for tidy storage and transportation. Also available with electrical cabinet keys conforming to the industrial standards.



Kraftform Kompakt VDE

Versatile tools for work on live wiring

Kraftform Kompakt VDE 60 i/62 i/65 i/18



2x Kraftform handle 817 VDE for Wera VDE interchangeable blades only

VDE interchangeable blades (each 154 mm long)

18-piece set

05347107001	
817 VDE	2 x 9x102
KK 62 i	1 x PH 1x154; 1 x PH 2x154
KK 62 i PH/S	1 x # 1x154; 1 x # 2x154
KK 60 i	1 x 1,0x5,5x154; 1 x 0,4x2,5x154; 1 x 0,6x3,5x154; 1 x 0,8x4,0x154
KK 65 i PZ	1 x PZ 1x154; 1 x PZ 2x154
KK 65 i PZ/S	1 x # 1x154; 1 x # 2x154
KK 96 VK 6,3	1 x 6,3x89
KK 97 VK 8,1	1 x 8,1x89
KK 98 DK	1 x 89
KK 99 FL	1 x 89

Kraftform Kompakt 60i+iS/62i/65i/67i/17



2x 817 VDE Kraftform handle for Wera VDE interchangeable blades only

VDE exchangeable blades (each 154 mm long)

17-piece set

05059030001	
817 VDE	2 x 9x102
KK 62 i	1 x PH 1x154; 1 x PH 2x154
KK 65 i PZ	1 x PZ 1x154; 1 x PZ 2x154
KK 65 i PZ/S	1 x # 1x154; 1 x # 2x154
KK 67 i TORX®	1 x TX 10x154; 1 x TX 15x154; 1 x TX 20x154; 1 x TX 25x154
KK 60 i	1 x 0,4x2,5x154; 1 x 0,8x4,0x154; 1 x 1,0x5,5x154; 1 x 1,2x6,5x154
KK 60 iS	1 x 0,6x3,5x154

Kraftform Kompakt VDE 60 i/65 i/67 i/16



1 Kraftform handle 817 VDE for Wera VDE interchangeable blades only

VDE interchangeable blades (each 154 mm long)

Single-pole voltage tester

16-piece set

05003474001	
817 VDE	1 x 9x102
KK 62 i	1 x PH 1x154; 1 x PH 2x154
KK 65 i PZ	1 x PZ 1x154; 1 x PZ 2x154
KK 65 i PZ/S	1 x # 1x154; 1 x # 2x154
KK 67 i TORX®	1 x TX 10x154; 1 x TX 15x154; 1 x TX 20x154; 1 x TX 25x154
KK 60 i	1 x 0,4x2,5x154; 1 x 0,6x3,5x154; 1 x 0,8x4,0x154; 1 x 1,0x5,5x154
247	1 x 0,5x3,0x70

Product not available in the USA and Canada.

Kraftform Kompakt VDE 60 iS/65 iS/67 iS/16



1 Kraftform handle 817 VDE for Wera VDE interchangeable blades only

VDE interchangeable blades (each 154 mm long) with reduced blade diameter with integrated protective insulation, allows sunken screws and spring elements to be accessed and actuated

Single-pole voltage tester

16-piece set

05003484001		
817 VDE	1 x 9x102	
KK 62 iS	1 x PH 1x154; 1 x PH 2x154	
KK 65 iS PZ	1 x PZ 1x154; 1 x PZ 2x154	
KK 65 iS PZ/S	1 x # 1x154; 1 x # 2x154	
KK 67 i TORX®	1 x TX 10x154	
KK 67 iS	1 x TX 15x154; 1 x TX 20x154; 1 x TX 25x154	
KK 60 i	1 x 0,4x2,5x154	
KK 60 iS	1 x 0,6x3,5x154; 1 x 0,8x4,0x154; 1 x 1,0x5,5x154	
247	1 x 0,5x3,0x70	

Product not available in the USA and Canada.

Kraftform Kompakt VDE 60 i/7



1 Kraftform handle 817 VDE for Wera interchangeable blades only

VDE interchangeable blades (each 154 mm long)

7-piece set

05003470001		
817 VDE	1 x 9x102	
KK 62 i	1 x PH 1x154; 1 x PH 2x154	
KK 60 i	1 x 0,4x2,5x154; 1 x 0,6x3,5x154; 1 x 0,8x4,0x154; 1 x 1,0x5,5x154	

Kraftform Kompakt VDE 60 i/68 i/7



1 Kraftform handle 817 VDE for Wera VDE interchangeable blades only

VDE interchangeable blades (each 154 mm long)

7-piece set

05003473001		
817 VDE	1 x 9x102	
KK 62 i	1 x PH 1x154; 1 x PH 2x154	
KK 60 i	1 x 0,6x3,5x154; 1 x 1,0x5,5x154	
KK 68 i	1 x # 1x154; 1 x # 2x154	

Kraftform Kompakt VDE 60 i/65 i/7



1 Kraftform handle 817 VDE for Wera interchangeable blades only

VDE interchangeable blades (each 154 mm long)

7-piece set

05003472001		
817 VDE	1 x 9x102	
KK 65 i PZ	1 x PZ 1x154; 1 x PZ 2x154	
KK 60 i	1 x 0,4x2,5x154; 1 x 0,6x3,5x154; 1 x 0,8x4,0x154; 1 x 1,0x5,5x154	

Folding pouch for 18-piece Kraftform Kompakt VDE sets, empty



	mm	mm	mm	mm	mm	mm
05671388001	180,0	110,0				

Kraftform Kompakt VDE

Versatile tools for work on live wiring

Series 7400 VDE Kraftform adjustable torque handle (0.3-3.5 Nm)



Application: For Wera interchangeable Kraftform Kompakt VDE blades only

Accuracy: ±6 % (DIN EN ISO 6789). Numerical torque value scale, audible excess-load signal

Handle: Kraftform with non-roll feature, multi-component

	Art.No.	mm	Nm	Nm	mm	
	05074752001	7440 VDE	9	0,3-1,2	0,05	192 7 9/16"
	05074750001	7441 VDE	9	1,2-3,0	0,10	192 7 9/16"
	05074757001	7444 VDE	9	1,7-3,5	0,10	192 7 9/16"

817 VDE Kraftform blade-holding handle



Application: For Wera interchangeable VDE blades only

Handle: Kraftform with non-roll feature, multi-component

	mm	mm
05003990001	9	102

Kraftform Kompakt VDE 60 i



Application: Slotted screws

Blade: Insulated, individually tested as per IEC 60900

Drive: 9 mm hexagonal with entry chamfer

Design: Conical blade, zinc-phosphated, Black Point

	mm	mm	mm	"	"
05003400001	0,4	2,5	154	3/32"	6 1/16"
05003401001	0,5	3,0	154	1/8"	6 1/16"
05003402001	0,6	3,5	154	9/64"	6 1/16"
05003403001	0,8	4,0	154	5/32"	6 1/16"
05003404001	1,0	5,5	154	7/32"	6 1/16"
05003405001	1,2	6,5	154	1/4"	6 1/16"

Kraftform Kompakt VDE 60 iS



Application: Slotted screws

Blade: Reduced blade diameter with integrated protective insulation, allows sunken screws and spring elements to be accessed and actuated, individually tested as per IEC 60900

Drive: 9 mm hexagonal with entry chamfer

Design: Conical blade, zinc-phosphated, Black Point

	mm	mm	mm	"	"
05003406001	0,6	3,5	154	9/64"	6 1/16"
05003407001	0,8	4,0	154	5/32"	6 1/16"
05003408001	1,0	5,5	154	7/32"	6 1/16"

Kraftform Kompakt VDE 62 i



Application: Phillips screws

Blade: Insulated, individually tested as per IEC 60900

Drive: 9 mm hexagonal with entry chamfer

Design: Zinc-phosphated, Black Point

		mm	"
05003410001	PH 0	154	6 1/16"
05003411001	PH 1	154	6 1/16"
05003412001	PH 2	154	6 1/16"

Kraftform Kompakt VDE 62 iS



Application: Phillips screws

Blade: Reduced blade diameter with integrated protective insulation, allows sunken PH screws to be accessed and actuated, individually tested as per IEC 60900

Drive: 9 mm hexagonal with entry chamfer

Design: Zinc-phosphated, Black Point

			
		mm	
05003413001	PH 1	154	6 1/16"
05003414001	PH 2	154	6 1/16"

Kraftform Kompakt VDE 65 i



Application: Pozidriv screws

Blade: Insulated, individually tested as per IEC 60900

Drive: 9 mm hexagonal with entry chamfer

Design: Zinc-phosphated, Black Point

			
		mm	
05003450001	PZ 0	154	6 1/16"
05003451001	PZ 1	154	6 1/16"
05003452001	PZ 2	154	6 1/16"

Kraftform Kompakt VDE 65 iS



Application: Pozidriv screws

Blade: Reduced blade diameter with integrated protective insulation, allows sunken PZ screws to be accessed and actuated, individually tested as per IEC 60900

Drive: 9 mm hexagonal with entry chamfer

Design: Zinc-phosphated, Black Point

			
		mm	
05003455001	PZ 1	154	6 1/16"
05003456001	PZ 2	154	6 1/16"





Tip



Kraftform VDE adjustable torque handle



Simple setting of the required torque by hand. Easy-to-read scale value. Measurement accuracy is $\pm 6\%$ in accordance with the standard EN ISO 6789. Distinctly audible and noticeable excess-load signal when the pre-set torque is reached.



Kraftform Kompakt VDE

Versatile tools for work on live wiring

Kraftform Kompakt VDE 62 i PH/S



Application: PlusMinus screws, slotted/Phillips
Blade: Insulated, individually tested as per IEC 60900
Drive: 9 mm hexagonal with entry chamfer
Design: PlusMinus, slotted/Phillips, zinc-phosphated, Black Point

			
		mm	
05003440001	# 1	154	6 1/16"
05003441001	# 2	154	6 1/16"

Kraftform Kompakt VDE 62 iS PH/S



Application: PlusMinus screws, slotted/Phillips
Blade: Reduced blade diameter with integrated protective insulation, allows sunken PlusMinus screws to be accessed and actuated, individually tested as per IEC 60900
Drive: 9 mm hexagonal with entry chamfer
Design: PlusMinus, slotted/Phillips, zinc-phosphated, Black Point

			
		mm	
05003442001	# 1	154	6 1/16"
05003443001	# 2	154	6 1/16"

Kraftform Kompakt VDE 65 i PZ/S



Application: PlusMinus screws, slotted/Pozidriv
Blade: Insulated, individually tested as per IEC 60900
Drive: 9 mm hexagonal with entry chamfer
Design: PlusMinus, slotted/Pozidriv, zinc-phosphated, Black Point

			
		mm	
05003445001	# 1	154	6 1/16"
05003446001	# 2	154	6 1/16"

Kraftform Kompakt VDE 65 iS PZ/S



Application: PlusMinus screws, slotted/Pozidriv
Blade: Reduced blade diameter with integrated protective insulation, allows sunken PlusMinus screws to be accessed and actuated, individually tested as per IEC 60900
Drive: 9 mm hexagonal with entry chamfer
Design: PlusMinus, slotted/Pozidriv, zinc-phosphated, Black Point

			
		mm	
05003447001	# 1	154	6 1/16"
05003448001	# 2	154	6 1/16"

Kraftform Kompakt VDE 67 i TORX®



Application: TORX® socket screws
Blade: Insulated, individually tested as per IEC 60900
Drive: 9 mm hexagonal with entry chamfer
Design: Zinc-phosphated, Black Point

			
		mm	
05003430001	TX 9	154	6 1/16"
05003431001	TX 10	154	6 1/16"
05003432001	TX 15	154	6 1/16"
05003433001	TX 20	154	6 1/16"
05003434001	TX 25	154	6 1/16"
05003435001	TX 27	154	6 1/16"
05003436001	TX 30	154	6 1/16"

Kraftform Kompakt VDE 67 iS TORX®



Application: TORX® socket screws

Blade: Reduced blade diameter with integrated protective insulation, allows sunken TORX® socket screws to be accessed and actuated, individually tested as per IEC 60900

Drive: 9 mm hexagonal with entry chamfer

Design: Zinc-phosphated, Black Point

		mm	mm
05003437001	TX 15	154	6 1/16"
05003438001	TX 20	154	6 1/16"
05003439001	TX 25	154	6 1/16"

Kraftform Kompakt VDE 68 iS



Application: Square socket head screws

Blade: Reduced blade diameter with integrated protective insulation, allows sunken square socket head screws to be accessed and actuated, individually tested as per IEC 60900

Drive: 9 mm hexagonal with entry chamfer

Design: Zinc-phosphated, Black Point

		mm	mm
05003417001	# 1	154	6 1/16"
05003418001	# 2	154	6 1/16"

Kraftform Kompakt VDE 68 i



Application: Square socket head screws

Blade: Insulated, individually tested as per IEC 60900

Drive: 9 mm hexagonal with entry chamfer

Design: Zinc-phosphated, Black Point

		mm	mm
05003415001	# 1	154	6 1/16"
05003416001	# 2	154	6 1/16"

Kraftform Kompakt VDE 64 i



Application: Hexagon socket screws

Blade: Insulated, individually tested as per IEC 60900

Drive: 9 mm hexagonal with entry chamfer

Design: Zinc-phosphated, Black Point

	mm	mm	mm
05003420001	2,5	154	6 1/16"
05003421001	3,0	154	6 1/16"
05003422001	4,0	154	6 1/16"
05003423001	5,0	154	6 1/16"
05003424001	6,0	154	6 1/16"

Kraftform Kompakt VDE

Versatile tools for work on live wiring

Kraftform Kompakt 96 VK 6,3



Switch cabinet key, 6.3 mm, glass-fibre reinforced

			
	mm	mm	
05003460001	6,3	89	3 ⁹ / ₁₆ "

Kraftform Kompakt 99 FL



Switch cabinet key, glass-fibre reinforced

			
		mm	
05003463001		89	3 ⁹ / ₁₆ "

Kraftform Kompakt 97 VK 8,1



Switch cabinet key, 8.1 mm, glass-fibre reinforced

			
	mm	mm	
05003461001	8,1	89	3 ⁹ / ₁₆ "

Kraftform Kompakt 98 DK



Switch cabinet key, glass-fibre reinforced

			
		mm	
05003462001		89	3 ⁹ / ₁₆ "




Kraftform Comfort VDE Screwdrivers

The ergonomic introduction to convenient screwdriving.

Handle with Kraftform geometry and blade made from power bit material with Black Point tip for precise fit – and they are even VDE-tested, too.





Multi-component Kraftform handle, for quick and low-exertion working.

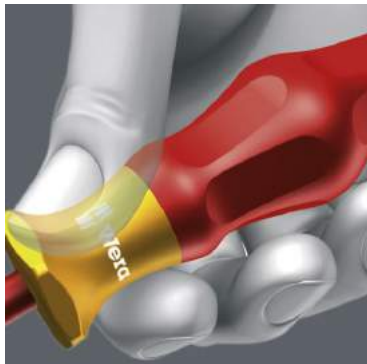


Screw symbol and tip size identification markings on the handle make it easier to find the right screwdriver in the tool case or at the workplace.



Hexagonal non-roll feature prevents any annoying rolling away at the workplace.

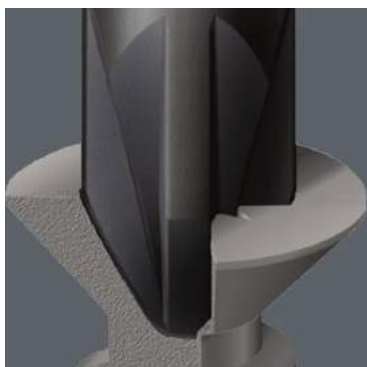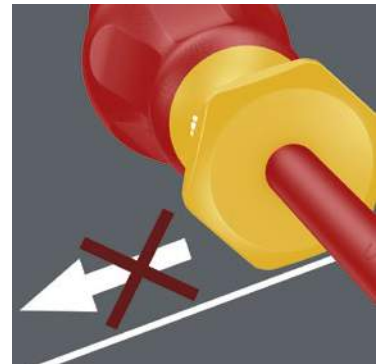

Wera Black Point tips and a refined hardening process ensure long service life of the tip, improved corrosion protection and an exact fit.

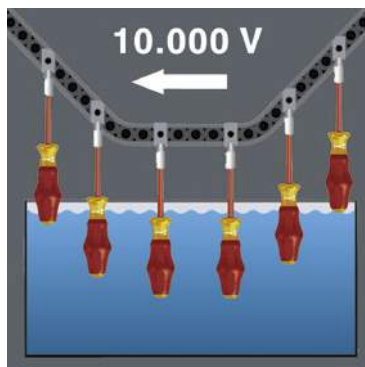

VDE tools: The individual testing in a water bath at 10,000 volts, in accordance with DIN EN 60900 (IEC 60900), ensures safe working under a load of up to 1,000 volts.



Kraftform Comfort VDE

Convenient, safe, good!

1160 i VDE Insulated screwdriver for slotted screws



Application: Slotted screws

Blade: Insulated, individually tested as per IEC 60900

Design: Conical tip, chrome-plated, Black Point

Handle: Kraftform Comfort with non-roll feature, multi-component

						
	mm	mm	mm	mm		
05031580001	0,4	2,5	80	81	$\frac{3}{32}$ "	$3\frac{1}{8}$ "
05031581001	0,5	3,0	100	81	$\frac{1}{8}$ "	4"
05031582001	0,6	3,5	100	81	$\frac{9}{64}$ "	4"
05031583001	0,8	4,0	100	98	$\frac{5}{32}$ "	4"
05031584001	0,8	4,0	150	98	$\frac{5}{32}$ "	6"
05031587001	1,0	5,5	125	98	$\frac{7}{32}$ "	5"
05031585001	1,0	5,5	200	98	$\frac{7}{32}$ "	8"
05031588001	1,2	6,5	150	105	$\frac{1}{4}$ "	6"
05031589001	1,2	8,0	175	112	$\frac{5}{16}$ "	7"

1165 i PZ VDE Insulated screwdriver for Pozidriv screws



Application: Suitable for Pozidriv screws

Blade: Insulated, individually tested as per IEC 60900

Design: Chrome-plated, Black Point

Handle: Kraftform Comfort with non-roll feature, multi-component

				
		mm	mm	
05031610001	PZ 0	80	81	$3\frac{1}{8}$ "
05031611001	PZ 1	80	98	$3\frac{1}{8}$ "
05031613001	PZ 2	100	105	4"
05031615001	PZ 3	150	112	6"

1162 i PH VDE Insulated screwdriver for Phillips screws



Application: Phillips screws

Blade: Insulated, individually tested as per IEC 60900

Design: Chrome-plated, Black Point

Handle: Kraftform Comfort with non-roll feature, multi-component

				
		mm	mm	
05031600001	PH 0	80	81	$3\frac{1}{8}$ "
05031601001	PH 1	80	98	$3\frac{1}{8}$ "
05031602001	PH 1	150	98	6"
05031603001	PH 2	100	105	4"
05031604001	PH 2	200	105	8"
05031605001	PH 3	150	112	6"



1160 i/7 Safety screwdriver set Kraftform Comfort VDE and voltage tester



Application: Slotted and Phillips screws

Content: 7-piece set in display carton

	
05031575001	
	1162 i PH VDE 1 x PH 1x80; 1 x PH 2x100
	1160 i VDE 1 x 0,4x2,5x80; 1 x 0,6x3,5x100; 1 x 0,8x4,0x100; 1 x 1,0x5,5x125
	4115 1 x 0,5x3,0x65

Product not available in the USA and Canada.

1160 i/1165 i/7 Screwdriver set Kraftform Comfort VDE and voltage tester



Application: Slotted and Pozidriv screws
Content: 7-piece set in display carton

	
05031576001	
	1165 i PZ VDE 1 x PZ 1x80; 1 x PZ 2x100
	1160 i VDE 1 x 0,4x2,5x80; 1 x 0,6x3,5x100; 1 x 0,8x4,0x100; 1 x 1,0x5,5x125
	4115 1 x 0,5x3,0x65

Product not available in the USA and Canada.



ESD Tools

When doing screwdriving jobs on electronic components (like e.g. smartphones and tablet PCs), there should be no electrostatic discharge as this could cause malfunctions and a complete failure.

Therefore, tools that are secure against electrostatic discharge are indispensable.





The requirements for ESD-safe screwdrivers are specified in the European standard DIN EN 61340-5-1. This standard also includes a handle that has to be out of a defined conductive material. The Wera products in the ESD series satisfy these standards and the even more stringent requirements demanded by some technology companies.



The electric surface resistance of the Wera ESD material is $\leq 10^9$ ohm. This securely protects components against electrostatic energy and associated damage.




Wera Black Point tips and a refined hardening process ensure long service life of the tip, improved corrosion protection and an exact fit.

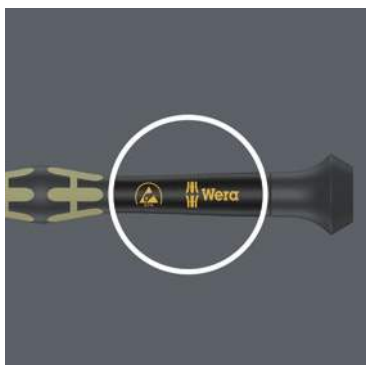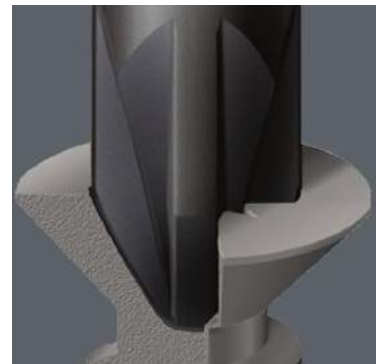

The fast-turning zone just below the rotating allows rapid twisting.



The power zone has integrated soft zones near the blade tip to ensure high torque transfer for loosening or tightening screws without losing contact with the screw.

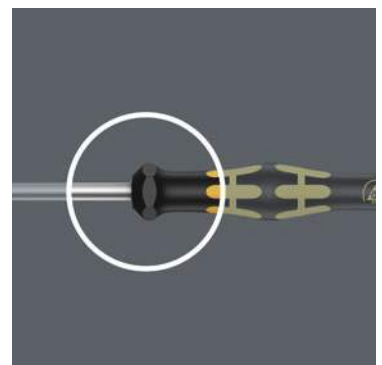

The precision zone directly above the blade gives the user a better feel for the right rotation angle during fine adjustment work.



ESD Series

ESD-safe tools

1578 A Kraftform Micro screwdriver for slotted screws



Application: Slotted screws
Blade: Round
Design: Chrome-plated, Black Point
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

							
	mm	mm	mm	mm	mm	mm	mm
05030101001	0,23	1,5	40	97	2,5	1/16"	1 9/16"
05030100001	0,25	1,2	40	97	2,5	0,05"	1 9/16"
05030102001	0,30	1,8	60	97	2,5	0,07"	2 3/8"
05030103001	0,40	2,0	60	97	2,5	5/64"	2 3/8"
05030104001	0,40	2,5	80	97	2,5	3/32"	3 1/8"
05030105001	0,50	3,0	80	97	3,0	1/8"	3 1/8"
05030106001	0,60	3,5	80	97	4,0	9/64"	3 1/8"
05030107001	0,80	4,0	80	97	4,0	5/32"	3 1/8"

1550 PH Kraftform Micro screwdriver for Phillips screws



Application: Phillips screws
Blade: Round
Design: Chrome-plated, Black Point
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

					
	mm	mm	mm	mm	mm
05030110001	PH 00	60	97	2,5	2 3/8"
05030111001	PH 0	60	97	3,0	2 3/8"
05030112001	PH 1	80	97	4,0	3 1/8"

1555 PZ Kraftform Micro screwdriver for Pozidriv screws



Application: Suitable for Pozidriv screws
Blade: Round
Design: Chrome-plated, Black Point
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

					
	mm	mm	mm	mm	mm
05030115001	PZ 0	60	97	3,0	2 3/8"
05030116001	PZ 1	80	97	4,0	3 1/8"

1567 TORX® HF Kraftform Micro screwdriver with holding function for TORX® screws



Application: TORX® socket screws
Blade: Round
Design: Holding function for TORX® screws made according to Acument Intellectual Properties specifications, chrome-plated, Black Point
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

					
	mm	mm	mm	mm	mm
05030400001	TX 4	40	97	2,5	1 9/16"
05030401001	TX 5	40	97	3,0	1 9/16"
05030402001	TX 6	40	97	3,0	1 9/16"
05030403001	TX 7	60	97	3,0	2 3/8"
05030404001	TX 8	60	97	3,0	2 3/8"
05030405001	TX 9	60	97	4,0	2 3/8"
05030406001	TX 10	60	97	4,0	2 3/8"

1567 TORX® Kraftform Micro screwdriver for TORX® screws



Application: TORX® socket screws

Blade: Round

Design: Chrome-plated, Black Point

Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

		 mm	 mm	 mm	 mm
05030120001	TX 4	40	97	2,5	1 ⁹ / ₁₆ "
05030121001	TX 5	40	97	3,0	1 ⁹ / ₁₆ "
05030122001	TX 6	40	97	3,0	1 ⁹ / ₁₆ "

1567 TORX® BO Screwdriver for tamper-proof TORX® screws



Application: TORX® socket screws with safety pin (BO = with bore hole)

Blade: Round

Design: Bore hole in TORX® section, chrome-plated, Black Point

Handle: Kraftform with non-roll feature, single-component

		 mm	 mm	 mm	 mm
05030131001	TX 10	80	81	4,0	3 ¹ / ₈ "
05030127001	TX 15	80	98	4,0	3 ¹ / ₈ "
05030128001	TX 20	100	98	4,5	4"
05030129001	TX 25	100	98	5,0	4"
05030130001	TX 30	115	98	6,0	4 ⁹ / ₁₆ "

Tip

Rotating cap and fast-turning zone




The fast-turning zone just below the rotating cap allow rapid twisting. This makes time-consuming grip adjustments as with other conventional precision screwdrivers unnecessary.

The power zone



The power zone has integrated soft zones near the blade tip to ensure high torque transfer for loosening or tightening screws without losing contact with the screw.

The precision zone



The precision zone directly above the blade gives the user a better feel for the right rotation angle during fine adjustment work.



ESD Series

ESD-safe tools

1572 ESD Kraftform Micro screwdriver for Microstix screws



Application: Microstix socket screws
Blade: Round
Design: Chrome-plated, Black Point
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

					
		mm	mm	mm	"
05030080001	m	40	97	2,5	1 ⁹ / ₁₆
05030081001	00	40	97	2,5	1 ⁹ / ₁₆
05030082001	F	40	97	2,5	1 ⁹ / ₁₆
05030083001	0	40	97	2,5	1 ⁹ / ₁₆
05030084001	1	40	97	2,5	1 ⁹ / ₁₆

1569 ESD Nutdriver



Application: Hexagon headed bolts, screws and nuts
Blade: Round
Design: Chrome-plated
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

					
		mm	mm	mm	"
05030410001	1,5	60	97	5,7	2 ³ / ₈
05030411001	1,8	60	97	5,7	2 ³ / ₈
05030412001	2,0	60	97	5,7	2 ³ / ₈
05030413001	2,5	60	97	5,7	2 ³ / ₈
05030414001	3,0	60	97	5,7	2 ³ / ₈
05030415001	3,2	60	97	5,7	2 ³ / ₈
05030416001	3,5	60	97	5,7	2 ³ / ₈
05030417001	4,0	60	97	5,7	2 ³ / ₈
05030418001	4,5	60	97	6,4	2 ³ / ₈
05030150001	5,0	60	97	7,0	2 ³ / ₈
05030151001	5,5	60	97	7,8	2 ³ / ₈

1578 A/6 Screwdriver set and rack for electronic applications



Application: Slotted and Phillips screws
Content: 6-piece set and rack in display carton

		
05030170001		
	1550 PH Micro	1 x PH 0x60; 1 x PH 1x80
	1578 A Micro	1 x 0,23x1,5x40; 1 x 0,25x1,2x40; 1 x 0,30x1,8x60; 1 x 0,40x2,5x80

1013 Kraftform Micro ESD bitholding screwdriver



Application: Suitable for bits with 4 mm Halfmoon drive (and Wera Serie 9) and 4 mm HIOS drive (and Wera Series 21)
Design: With quick-release chuck for rapid bit change
Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

			
	mm	mm	"
05300004001	23	97	1"

Bits of the Wera serie 9 and 21 can be found on pages 285, 314, 320, 322, 327, 334, 346 and 347.

816 R ESD bitholding screwdriver, non-magnetic



Application: Suitable for 1/4" DIN ISO 1173-C and E 6.3 hexagon insert bits and Wera Series 1 and 4

Design: 1/4" hexagon socket with Wera quick-release chuck and Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Handle: Kraftform with non-roll feature, multi-component

		mm
05051464001	1/4"	119

813 R ESD bitholding screwdriver, non-magnetic



Application: Suitable for 1/4" DIN ISO 1173-C and E 6.3 hexagon insert bits and Wera Series 1 and 4

Design: 1/4" hexagon socket with Wera quick-release chuck and Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Handle: Kraftform with non-roll feature, multi-component

		mm
05051273001	1/4"	90

Tip

Chuck-all



The Rapidaptor quick-release chucks hold both 1/4" bits as per DIN ISO 1173 C 6.3 (Wera series 1) and E 6.3 (Wera series 4).

Single-hand



All functions of the quick-release chuck such as the inserting or releasing of bits can be done with just one hand. That is faster, more economic and ergonomic. There are no unnecessary manoeuvres.

Rapid-in and self-lock



The bit can be pushed into the chuck without moving the sleeve. It automatically locks with a secure and wobble-free fit as soon as the bit is applied to the screw.

Rapid-out



Simply push the sleeve forward to change the bit. The spring mechanism lifts the bit off the magnet and unlocks the tool. The bit can be easily removed. Particularly helpful: even the smallest bits can be removed without any extra tools.

ESD Series

ESD-safe tools

Kraftform Kompakt 60 ESD



Pouch with 89 mm bits

17-piece set

1 Kraftform bitholding screwdriver 816 R ESD with Rapidaptor quick-release chuck

05051043001		
●	816 R ESD	1 x 1/4"x119
⊕	851/4 Z PH	1 x PH 1x89; 1 x PH 2x89; 1 x PH 3x89
⊕	855/4 Z PZ	1 x PZ 1x89; 1 x PZ 2x89; 1 x PZ 3x89
⊕	867/4 Z TORX® B0	1 x TX 10x89; 1 x TX 15x89; 1 x TX 20x89; 1 x TX 25x89; 1 x TX 30x89
○	840/4 Z Hex-Plus	1 x 3,0x89; 1 x 4,0x89; 1 x 5,0x89; 1 x 6,0x89
●	800/4 Z	1 x 1,0x5,5x89

Kraftform Kompakt Micro-Set ESD/20 SB



Pouch with 44 mm bits

20-piece set

1 Kraftform Micro ESD bitholding screwdriver

05073671001		
●	1013 Kraftform Micro ESD	1 x 97
●	851/9 C	1 x PH 00x44; 1 x PH 0x44; 1 x PH 1x44
●	851/9 C	1 x PH 00x44; 1 x PH 0x44; 1 x PH 1x44
⊕	867/9 C TORX®	1 x TX 1x44; 1 x TX 2x44; 1 x TX 3x44; 1 x TX 4x44; 1 x TX 5x44; 1 x TX 6x44
⊕	867/9 C TORX PLUS®	1 x 1 IPx44; 1 x 2 IPx44; 1 x 3 IPx44; 1 x 4 IPx44
○	840/9 C	1 x 1,5x44; 1 x 2,0x44
●	800/9 C	1 x 0,23x1,5x44; 1 x 0,40x2,0x44; 1 x 0,50x3,0x44
⊕	873/9 Five Lobe	1 x # 1x44

Kraftform Kompakt Micro-Set ESD/11 SB



Pouch with 44 mm bits
11-piece set
1 Kraftform Micro ESD bitholding screwdriver

05073670001		
1013	1 x 97	
Kraftform Micro ESD		
851/9 C	1 x PH 00x44; 1 x PH 0x44; 1 x PH 1x44	
851/9 C	1 x PH 00x44; 1 x PH 0x44; 1 x PH 1x44	
867/9 C	1 x TX 5x44; 1 x TX 6x44	
TORX®		
800/9 C	1 x 0,23x1,5x44; 1 x 0,40x2,0x44; 1 x 0,50x3,0x44	
840/9 C	1 x 1,5x44; 1 x 2,0x44	

811/1 ESD bitholding screwdriver



Application: Suitable for 1/4" DIN ISO 1173-C 6.3 hexagon socket bits and Wera Series 1

Design: Extra short, 1/4" hexagon insert bits with retaining ring

Handle: Kraftform, single-component

				
	mm	mm	mm	mm
05051106001	1/4"	10	54	3/8"

810/1 ESD bitholding screwdriver with retaining ring



Application: Suitable for 1/4" DIN ISO 1173-C 6.3 hexagon insert bits and Wera Series 1

Blade: Hexagon

Design: 1/4" hexagon socket with retaining ring, chrome-plated

Handle: Kraftform with non-roll feature, single-component

				
	mm	mm	mm	mm
05328463001	1/4"	100	112	4"



Ratchets

The Zyklop Ratchets, 1/4"



Zyklop Speed

130



Zyklop Metal Push

136



Zyklop Metal Switch

138



Zyklop Accessories

140



The Zyklop Ratchets, 3/8"



Zyklop Speed

146



Zyklop Metal Push

150



Zyklop Metal Switch

152



Zyklop Accessories

154

The Zyklop Ratchets, 1/2"



Zyklop Speed

160



Zyklop Hybrid

164



Zyklop Metal Push

166



Zyklop Metal Switch

168



Zyklop Accessories

170

1/2" Koloss ratchet with hammer function



176

Zyklop Mini 1 & 2



180



Wera ratchets

We simply could not believe that it was not possible to improve on existing standards for ratchets.

We took up the challenges confronting users when working with ratchets. Mostly, it is a question of working speed, confined working space and diverse functionality.

We did a lot of research, until we finally came up with suitable problem solutions that we can offer across the entire range.



The Zyklop Speed Ratchet

The Wera Zyklop Speed ratchet combines the advantages of five different types of ratchet in one. And it is a really fast mover.



The Zyklop Hybrid Ratchet

Combines robustness, slim design, and little weight.



The Zyklop Ratchet Metal Push

Extremely slim. Long leverage. With push-through square.



The Zyklop Ratchet Metal Switch

Extremely slim. Long leverage. With switch lever.



The Koloss Ratchet

The heavy-duty ratchet that can also be safely used as a hammer.



The Zyklop Mini Ratchets

For all difficult-to-access applications.

Zyklop Speed ratchet

We just could not believe that it was not possible to make a ratchet work more quickly. Moreover, we did not like the way users had to apply many different types of ratchet to get a job done. We therefore questioned everything that was conventional about ratchets. The Zyklop Speed ratchet is what has emerged. The flywheel design of the Zyklop Speed ensures high working speeds. And: the Zyklop Speed combines the advantages of 5 types of ratchet in a single tool. Additionally, it can be used as a screwdriver.




The ratchet head pivots freely and can be locked into any position by using the slide switch that is positioned on either side. It is even possible to work in very confined and difficult-to-access areas with enhanced hand clearance. The pre-defined locking at 0°, 15° and 90°, both to the right and left, ensure safe working without any slipping of the ratchet head.


The Zyklop Speed ratchets are really fast movers. The gyrating mass design means that screwdriving is accelerated. The rotation-symmetric structure of the Kraftform handle and the free-turning sleeve reinforce this rapid twisting process, particularly when the ratchet does not engage due to too little resistance in the thread.




The outstanding design of the Kraftform handle fits perfectly into the hand, preventing hand injuries such as blisters and calluses. The hard materials used for the handle ensure quick and easy hand repositioning without any danger of the skin "sticking" to the handle, whilst the softer "anti-slip" zones enable the low-loss transfer of high forces – resulting in less screwdriving effort being required. The circular handle design allows rapid turning in the 0° position.

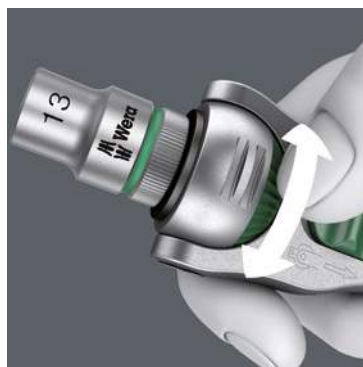


All Zyklop Speed ratchets feature a thumbwheel that can be used to quickly and easily switch between clockwise and anticlockwise rotation, at any position. No complicated handling, no loss of time!

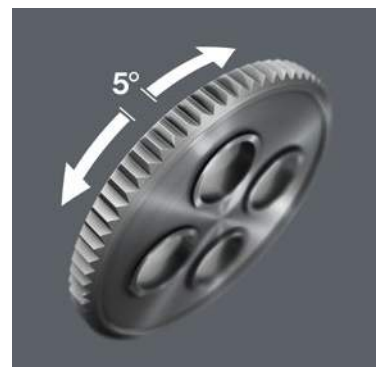

The reversible ratchet with 72 fine-pitched teeth has a low return angle of only 5°. This short stroke allows fast and precise work in all types of installation.

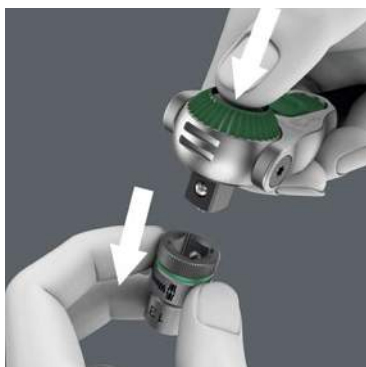

The ball lock holds the sockets and attachments securely, ensuring safe working. A changeover into any predefined position is completed by simply pressing the release button – this is even the case in the 90° position.

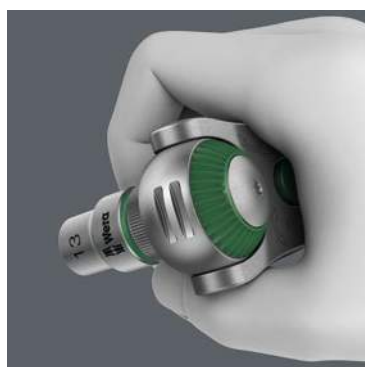

The ratchet head has an ergonomic design with finger recesses that offer a perfect contact surface for the hand or fingers to turn the head.



The ratchet can be used as a conventional screwdriver in the 0° position by attaching a bitholding adaptor and a bit.

Zyklop Hybrid ratchet

We wanted to integrate all the mostly-desired ratchet advantages in a single tool. Our idea was to develop a light ratchet with an ergonomic handle, slim design, long lever and an extension option.

Since the term “hybrid” refers to a combination from various sectors, it was quite easy to decide on the name.



The reversible ratchet with 72 finepitched teeth has a low return angle of only 5°. This short stroke allows fast and precise work in all types of installation.



The ball lock holds the sockets and attachments securely, ensuring safe working.




Multi-component Kraftform handle for optimum pressure and tensile loads.



Very slim ratchet head.



Larger overall length for higher torque transfer.

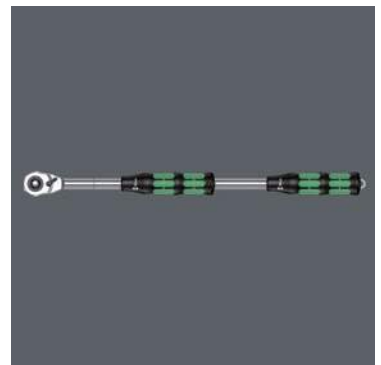

Even more torque can be applied by using the extension.



Zyklop Metal ratchet

Due to the ever-more confined working environment, space is becoming more and more an issue for the application of ratchets. Our product developers therefore intensively occupied themselves with the issue of confined working spaces, and Wera has now solved this problem.

The extremely slim and robust Zyklop Metal ratchet with a long lever was what emerged. When the change in direction needs to be quick, the Zyklop Metal Switch ratchet is the right tool.

When the socket must not get lost and a coincidental change of direction has to be avoided at all cost, the Zyklop Metal Push is the correct choice.




Forged, full metal ratchet (chrome-molybdenum) that is extremely robust with a long service life; slim design to enable work in very confined spaces.




Zyklop Metal Push

Smooth push-through mechanism, that cannot get lost.

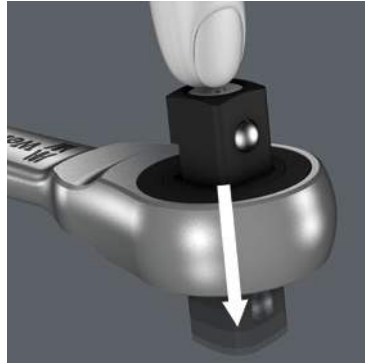

Zyklop Metal Push

The dual-ratchet-teeth design means that a 76 fine-toothing division can be achieved from the 38 robust teeth with a return angle of only 4.7°.

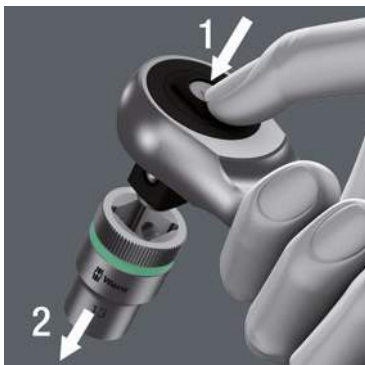

The ball lock holds the sockets and attachments securely, ensuring safe working.



Zyklop Metal Switch
Switch lever for convenient change of direction.



Zyklop Metal Switch
Fine-tooth mechanism with 72 teeth for a return angle of only 5°. This short stroke allows fast and precise work in all types of installation.

Zyklop Accessories

We did not just want our creativity to end with the ratchets themselves so we also occupied ourselves intensively with ratchet accessories. That is why our users are now provided with an extension with freely spinning sleeve and flexible lock to enable more secure and more rapid screwdriving.

The sockets have been completely redesigned: we wanted to spare the user the need of having two different series – one for manual and the other for power tool applications.

And: we wanted to enormously simplify the task of finding the right sizes. Technically, our own ambitious goals represented a real challenge: to endow sockets with the advantage of the holding function on screwdrivers and bits. We succeeded in this!




"Take it easy" tool finder system - with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).



The manual and machine sockets can be used both for hand and power tools use (non-impact). Users need just one socket set for all applications.



Zyklop sockets and bit sockets with holding function securely hold the screw on the tool. This is particularly helpful in difficult-to-access working spaces where the second hand cannot be used to hold the screw.

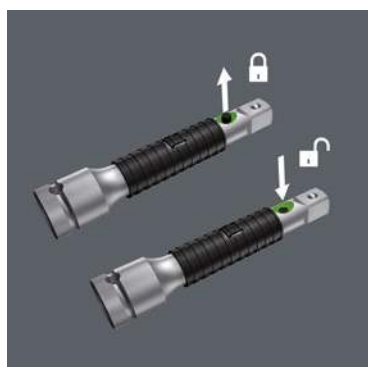

The extensions from the premium lines are also equipped with the unique “flexible-lock-system”. By activating this system, attachments can be fixed to the extension permanently – preventing slipping and any unintentional loss of the attachment. When the system is deactivated, the sockets can be attached as usual and changed in a flash.



The freely spinning sleeve on the Zyklop Speed and the Zyklop extension effectively accelerates the turning of screws and nuts.



Zyklop Ratchets, 1/4"



Zyklop Speed

130



Zyklop Metal Push

136



Zyklop Metal Switch

138



Zyklop Accessories


140



The Zyklop Speed Ratchets, 1/4"

Combine 5 types of ratchet

8100 SA 6 Zyklop Speed Ratchet Set, 1/4" drive, metric




28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Speed Ratchet with 1/4" drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 15 bits

05004016001	
8000 A	1 x 1/4"x152,0
8790 HMA	1 x 5,0x23,0; 1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0; 1 x 11,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0
8794 LA	1 x 1/4"x150,0
8794 A	1 x 1/4"x56,0
8784 A1	1 x 1/4"x1/4"x37,0
851/4 TZ PH	1 x PH 1x50; 1 x PH 2x50; 1 x PH 3x50
855/4 TZ PZ	1 x PZ 1x50; 1 x PZ 2x50
867/4 Z TORX®	1 x TX 10x50; 1 x TX 15x50; 1 x TX 20x50; 1 x TX 25x50; 1 x TX 27x50; 1 x TX 30x50
840/4 Z Hex-Plus	1 x 3,0x50; 1 x 4,0x50; 1 x 5,0x50; 1 x 6,0x50

8100 SA 9 Zyklop Speed Ratchet Set, 1/4" drive, imperial




28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Speed Ratchet with 1/4" drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 15 bits

05004019001	
8000 A	1 x 1/4"x152,0
8790 HMA	1 x 3/16"x23,0; 1 x 7/32"x23,0; 1 x 1/4"x23,0; 1 x 9/32"x23,0; 1 x 5/16"x23,0; 1 x 11/32"x23,0; 1 x 3/8"x23,0; 1 x 7/16"x23,0; 1 x 1/2"x23,0
8794 LA	1 x 1/4"x150,0
8794 A	1 x 1/4"x56,0
8784 A1	1 x 1/4"x1/4"x37,0
851/4 TZ PH	1 x PH 1x50; 1 x PH 2x50; 1 x PH 3x50
855/4 TZ PZ	1 x PZ 1x50; 1 x PZ 2x50
867/4 Z TORX®	1 x TX 10x50; 1 x TX 15x50; 1 x TX 20x50; 1 x TX 25x50; 1 x TX 27x50; 1 x TX 30x50
840/4 Z Hex-Plus	1 x 5/32"x50; 1 x 3/16"x50; 1 x 7/32"x50; 1 x 1/4"x50

Kraftform Kompakt Zyklop MS1 Metal/Speed 1/4"



8-piece set; in surface-protecting, compact textile box, highly robust; low volume and weight for simplified mobility.

1 Zyklop Speed ratchet with 1/4" drive, 1 Zyklop Metal ratchet with switch lever and 1/4" drive, 1 Zyklop extension (long) with rapid spin sleeve and "flexible-lock" system, 2 Zyklop extensions (short and long) with rapid spin sleeve, 1 adaptor with rapid change chuck, 1 wobble extension, 1 universal joint.

05135949001		
8000 A	1 x 1/4"x152,0	
8004 A	1 x 1/4"x141,0	
8796 LA	1 x 1/4"x150,0	
8794 LA	1 x 1/4"x150,0	
8794 SA	1 x 1/4"x75,0	
8784 A1	1 x 1/4"x1/4"x37,0	
8794 A	1 x 1/4"x56,0	
8795 A	1 x 1/4"x35,5	

Tip

Zyklop "6 in 1"



1. Fine-tooth ratchet
2. Flex-head ratchet
3. Angle ratchet
4. Quick-release ratchet
5. Power ratchet
6. Screwdriver

New set concept



The textile boxes offer dramatically improved portability, and are space-saving to boot! This means you can now carry the same collection of tools, in a much more compact and comfortable package.



The hassle of running back and forth for the right tools has now become a thing of the past. And the much lower weight of a set makes carrying more convenient than ever before. The textile box including the tool will even survive a fall undamaged.



"Take it easy"




"Take it easy" tool finder system – with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).

The Zyklop Speed Ratchets, 1/4"

Combine 5 types of ratchet

8100 SA 2 Zyklop Speed ratchet set, 1/4" drive, metric




42-piece set in strong metal case

1 Zyklop ratchet with 1/4" drive, 13 Zyklop sockets (metric), 2 Zyklop "flexible-lock" extensions (short and long) with free-turning sleeve, 1 wobble extension, 1 sliding T-handle, 1 universal joint, 1 adaptor with quick-release chuck, 22 bits

05003533001	
8000 A	1 x 1/4"x152,0
8790 HMA	1 x 4,0x23,0; 1 x 4,5x23,0; 1 x 5,0x23,0; 1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 9,0x23,0; 1 x 10,0x23,0; 1 x 11,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0; 1 x 14,0x23,0
8789 A	1 x 1/4"x110,0
8794 A	1 x 1/4"x56,0
8795 A	1 x 1/4"x35,5
8784 A1	1 x 1/4"x1/4"x37,0
8796 SA	1 x 1/4"x75,0
8796 LA	1 x 1/4"x150,0
840/1 Z Hex-Plus	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25; 1 x 8,0x25
867/1 Z TORX® B0	1 x TX 8x25; 1 x TX 9x25; 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25
800/1 Z	1 x 0,6x4,5x25; 1 x 1,0x5,5x25; 1 x 1,2x8,0x25
851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25; 1 x PZ 3x25

8100 SA 4 Zyklop Speed ratchet set, 1/4" drive, imperial




41-piece set in strong metal case

1 Zyklop ratchet with 1/4" drive, 10 Zyklop sockets (imperial), 2 Zyklop "flexible-lock" extensions (short and long) with free-turning sleeve, 1 wobble extension, 1 sliding T-handle, 1 universal joint, 1 adaptor with quick-release chuck, 24 bits

05003535001	
8000 A	1 x 1/4"x152,0
8790 HMA	1 x 3/16"x23,0; 1 x 7/32"x23,0; 1 x 1/4"x23,0; 1 x 9/32"x23,0; 1 x 5/16"x23,0; 1 x 11/32"x23,0; 1 x 3/8"x23,0; 1 x 7/16"x23,0; 1 x 1/2"x23,0; 1 x 9/16"x23,0
8789 A	1 x 1/4"x110,0
8794 A	1 x 1/4"x56,0
8795 A	1 x 1/4"x35,5
8784 A1	1 x 1/4"x1/4"x37,0
8796 SA	1 x 1/4"x75,0
8796 LA	1 x 1/4"x150,0
867/1 Z TORX® B0	1 x TX 8x25; 1 x TX 9x25; 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25
800/1 Z	1 x 0,6x4,5x25; 1 x 1,0x5,5x25; 1 x 1,2x8,0x25
851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25; 1 x PZ 3x25
840/1 Z Hex-Plus	1 x 5/64"x25; 1 x 3/32"x25; 1 x 1/8"x25; 1 x 9/64"x25; 1 x 5/32"x25; 1 x 3/16"x25; 1 x 7/32"x25

8100 SA/SC 2 Zyklop Speed ratchet set, 1/4" drive and 1/2" drive, metric



43 piece set, in strong metal case

1 Zyklop ratchet with 1/4" drive, 1 Zyklop ratchet with 1/2" drive, 21 Zyklop sockets (metric), 2 Zyklop "flexible-lock" extensions (long) with freewheel sleeve, 1 adaptor with quick-release chuck, 1 Kraftform bitholding screwdriver with Rapidaptor quick-release chuck, 16 bits

05160785001		
8000 A	1 x 1/4"x152,0	
8790 HMA	1 x 4,0x23,0; 1 x 4,5x23,0; 1 x 5,0x23,0; 1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 9,0x23,0; 1 x 10,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0	
8784 A1	1 x 1/4"x1/4"x37,0	
8796 LA	1 x 1/4"x150,0	
8000 C	1 x 1/2"x277,0	
8790 HMC	1 x 13,0x37,0; 1 x 14,0x37,0; 1 x 15,0x37,0; 1 x 16,0x37,0; 1 x 17,0x37,0; 1 x 18,0x37,0; 1 x 19,0x37,0; 1 x 21,0x37,0; 1 x 22,0x37,0; 1 x 24,0x37,0	
8796 LC	1 x 1/2"x250,0	
816 R	1 x 1/4"x119	
800/4 Z	1 x 1,0x5,5x89	
840/4 Z Hex-Plus	1 x 3,0x89; 1 x 4,0x89; 1 x 5,0x89; 1 x 6,0x89	
851/4 Z PH	1 x PH 1x89; 1 x PH 2x89; 1 x PH 3x89	
855/4 Z PZ	1 x PZ 1x89; 1 x PZ 2x89; 1 x PZ 3x89	
867/4 Z TORX®1 B0	1 x TX 10x89; 1 x TX 15x89; 1 x TX 20x89; 1 x TX 25x89; 1 x TX 30x89	

Tip

How to notice missing tools more quickly




Perfectly conceived in every detail: the storage case for the Zyklop Speed ratchet sets! The two-tone foam insert section means that the tools can be quickly and reliably replaced, and that missing tools can be detected immediately. The tools and their position can be clearly seen in the lid where they have been laser-etched, ensuring

that they are legible even when the insert section is covered with grease, dirt or oil. Additionally, the foam section can be removed and placed in the drawer of a tool cabinet or trolley.



"Flexible-lock-system"



The extensions from the premium lines are also equipped with the unique "flexible-lock-system". By activating this system, attachments can be fixed to the extension permanently – preventing slipping and any unintentional loss of the attachment. When the system is deactivated, the sockets can be attached as usual and changed in a flash.

Is it also possible to reverse the drive with oily hands?



The thumbwheel is designed in such a way that it offers outstanding grip and can, therefore, even be operated with oily fingers.

The Zyklop Speed Ratchets, 1/4"

Combine 5 types of ratchet

Kraftform Kompakt Zyklop Speed



26-piece set in a belt pouch

1 Zyklop Speed ratchet with 1/4" drive, 7 Zyklop sockets (metric), 1 Zyklop extension (long) with free-turning sleeve, 1 adaptor, 16 bits of 50 mm in length

05051045001	
8000 A	1 x 1/4"x152,0
8784 A1	1 x 1/4"x1/4"x37,0
8794 LA	1 x 1/4"x150,0
851/4 TZ PH	1 x PH 1x50; 1 x PH 2x50; 1 x PH 3x50
855/4 TZ PZ	1 x PZ 1x50; 1 x PZ 2x50
867/4 Z TORX®	1 x TX 10x50; 1 x TX 15x50; 1 x TX 20x50; 1 x TX 25x50; 1 x TX 27x50; 1 x TX 30x50
800/4 Z	1 x 1,0x5,5x50
840/4 Z Hex-Plus	1 x 3,0x50; 1 x 4,0x50; 1 x 5,0x50; 1 x 6,0x50
8790 HMA	1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0



”To learn more about this product, scan the QR code. “

8000 A Zyklop Speed ratchet with 1/4" drive



Application: 1/4" square sockets and 1/4" adaptors with square drive, equipped with ball lock

Design: Flywheel design and easy-to-grip free-turning sleeve for faster work, swivel ratchet head, defined lock positions at 0° and 90° to the left and right as well as at 15° before 90° inwards, at 0° it can be used like a conventional screwdriver, pushbutton release, left/right switchover, fine-tooth design, small return angle of 5°

Handle: Multi-component Kraftform handle ensures minimum fatigue

05003500001	1/4"	152,0
-------------	------	-------

8000 A SB Zyklop ratchet with 1/4" drive

05073260001	1 x 1/4"x152,0	4013288
-------------	----------------	---------





The Zyklop Metal Ratchets Push, 1/4"

With push-through square

8100 SA 7 Zyklop Metal Ratchet Set with push-through square, 1/4" drive, metric




28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with push-through square and 1/4" drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 15 bits

05004017001		
8003 A	1 x 1/4"x141,0	
8790 HMA	1 x 5,0x23,0; 1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0; 1 x 11,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0	
8794 LA	1 x 1/4"x150,0	
8794 A	1 x 1/4"x56,0	
8784 A1	1 x 1/4"x1/4"x37,0	
851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25	
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25	
867/1 Z TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 27x25; 1 x TX 30x25	
840/1 Z Hex-Plus	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25	

8100 SA 10 Zyklop Metal Ratchet Set with push-through square, 1/4" drive, imperial




28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with push-through square and 1/4" drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 15 bits

05004020001		
8003 A	1 x 1/4"x141,0	
8790 HMA	1 x 3/16"x23,0; 1 x 7/32"x23,0; 1 x 1/4"x23,0; 1 x 9/32"x23,0; 1 x 5/16"x23,0; 1 x 11/32"x23,0; 1 x 3/8"x23,0; 1 x 7/16"x23,0; 1 x 1/2"x23,0	
8794 LA	1 x 1/4"x150,0	
8794 A	1 x 1/4"x56,0	
8784 A1	1 x 1/4"x1/4"x37,0	
851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25	
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25	
867/1 Z TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 27x25; 1 x TX 30x25	
840/1 Z Hex-Plus	1 x 5/32"x25; 1 x 3/16"x25; 1 x 7/32"x25; 1 x 1/4"x25	

8003 A Zyklop Metal Ratchet with push-through square and 1/4" drive



Application: 1/4" square sockets as well as for 1/4" adaptors with square drive, with ball locking device

Design: Forged, full metal ratchet (chrome-molybdenum) that is extremely robust with a long service life; slim design to enable work in very confined spaces; the dual-ratchet-teeth design means that a 76 fine-toothing division can be achieved from the 38 robust teeth with a return angle of only 4.7°; simple direction change with the undetachable push-through square and very secure socket lock mechanism

	mm	mm	mm	mm
05004003001	1/4"	141,0	21	22



” To learn more about this product, scan the QR code. “

Tip

The Zyklop Metal Ratchets Push



Forged, full metal ratchet (chrome-molybdenum) that is extremely robust with a long service life; slim design to enable work in very confined spaces.

Textile boxes



The textile boxes offer dramatically improved portability, and are space-saving to boot!

This means you can now carry the same collection of tools, in a much more compact and comfortable package. The hassle of running back and forth for the right tools has now become a thing of the past. And the much lower weight of a set makes carrying more convenient than ever before. The textile box including the tool will even survive a fall undamaged. And: it leaves absolutely no signs of scratches on sensitive surfaces.



“Take it easy”



“Take it easy” tool finder system – with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).

The Zyklop Metal Ratchets Switch, 1/4"

With switch lever

8100 SA 8 Zyklop Metal Ratchet Set with switch lever, 1/4" drive, metric



28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with switch lever and 1/4" drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 15 bits

05004018001	
8004 A	1 x 1/4"x141,0
8790 HMA	1 x 5,0x23,0; 1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0; 1 x 11,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0
8794 LA	1 x 1/4"x150,0
8794 A	1 x 1/4"x56,0
8784 A1	1 x 1/4"x1/4"x37,0
851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25
867/1 Z TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 27x25; 1 x TX 30x25
840/1 Z Hex-Plus	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25

8100 SA 11 Zyklop Metal Ratchet Set with switch lever, 1/4" drive, imperial



28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with switch lever and 1/4" drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 15 bits

05004021001	
8004 A	1 x 1/4"x141,0
8790 HMA	1 x 3/16"x23,0; 1 x 7/32"x23,0; 1 x 1/4"x23,0; 1 x 9/32"x23,0; 1 x 5/16"x23,0; 1 x 11/32"x23,0; 1 x 3/8"x23,0; 1 x 7/16"x23,0; 1 x 1/2"x23,0
8794 LA	1 x 1/4"x150,0
8794 A	1 x 1/4"x56,0
8784 A1	1 x 1/4"x1/4"x37,0
851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25
867/1 Z TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 27x25; 1 x TX 30x25
840/1 Z Hex-Plus	1 x 5/32"x25; 1 x 3/16"x25; 1 x 7/32"x25; 1 x 1/4"x25

8004 A Zyklop Metal Ratchet with switch lever and 1/4" drive



Application: 1/4" square sockets as well as for 1/4" adaptors with square drive, with ball locking device

Design: Forged, full metal ratchet (chrome-molybdenum) that is extremely robust with a long service life; slim design to enable work in very confined spaces; fine-tooth mechanism with 72 teeth for a return angle of only 5°; switch lever for convenient change of direction; secure socket locking function

05004004001	1/4"	141,0 mm	19 mm	22 mm

Tip

The Zyklop Metal Ratchets Switch



Extremely slim. Long leverage. Very robust without any torque limitation. Forged, full metal ratchet out of chrome molybdenum.

Textile boxes



The textile boxes offer dramatically improved portability, and are space-saving to boot!

This means you can now carry the same collection of tools, in a much more compact and comfortable package. The hassle of running back and forth for the right tools has now become a thing of the past. And the much lower weight of a set makes carrying more convenient than ever before. The textile box including the tool will even survive a fall undamaged. And: it leaves absolutely no signs of scratches on sensitive surfaces.



"Take it easy"



"Take it easy" tool finder system – with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).

Zyklop accessories, 1/4"

The perfect add-on for all Zyklop ratchets

8790 HMA Zyklop 1/4" socket



Application: Hexagon headed bolts, screws and nuts

Design: Manual and (non-impact) machine applications, ball intercept ring, knurls at base for precision handling in manual operations, chrome vanadium, brushed chrome-plated finish. Take it easy toolfinder: Colour coding to enable the desired socket to be easily located.

	mm	mm	mm	mm	mm	mm
05003501001	4,0		23,0	6,9	13,0	10,0
05003502001	4,5		23,0	7,5	13,0	10,0
05003503001	5,0		23,0	8,2	13,0	10,0
05003504001	5,5		23,0	8,8	13,0	10,0
05003505001	6,0		23,0	9,4	13,0	10,0
05003506001	7,0		23,0	11,0	13,0	10,0
05003507001	8,0		23,0	12,0	13,0	10,0
05003508001	9,0		23,0	13,0	14,0	10,0
05003509001	10,0		23,0	14,5	14,5	-
05003510001	11,0		23,0	16,0	15,0	13,0
05003511001	12,0		23,0	17,0	16,0	13,0
05003512001	13,0		23,0	18,0	17,0	13,0
05003513001	14,0		23,0	20,0	18,0	13,0
05003514001		3/16"	23,0	7,5	13,0	10,0
05003515001		7/32"	23,0	8,8	13,0	10,0
05003516001		1/4"	23,0	11,0	13,0	10,0
05003517001		9/32"	23,0	11,0	13,0	10,0
05003518001		5/16"	23,0	12,0	13,0	10,0
05003519001		11/32"	23,0	13,0	14,0	10,0
05003520001		3/8"	23,0	14,5	14,5	-
05003521001		7/16"	23,0	16,0	15,0	13,0
05003522001		1/2"	23,0	18,0	17,0	13,0
05003523001		9/16"	23,0	20,0	18,0	13,0

8796 SA Zyklop "flexible-lock" extension with free-turning sleeve, short, 1/4"



Application: 1/4" square drive sockets with ball lock

Design: Flexible lock system either for permanent interlocking or fast change of accessories, free-turning sleeve for rapid tightening or loosening of screws and nuts, chrome vanadium, brushed chrome-plated finish

	mm	mm
05003530001	1/4"	75,0

8796 LA Zyklop "flexible-lock" extension with free-turning sleeve, long, 1/4"



Application: 1/4" square drive sockets with ball lock

Design: Flexible lock system either for permanent interlocking or fast change of accessories, free-turning sleeve for rapid tightening or loosening of screws and nuts, chrome vanadium, brushed chrome-plated finish

	mm	mm
05003531001	1/4"	150,0

8794 SA Zyklop extension with free-turning sleeve, short, 1/4"



Application: 1/4" square drive sockets with ball lock

Design: Easy-to-grip free-turning sleeve for rapid tightening or loosening of screws and nuts, chrome vanadium, brushed chrome-plated finish

	 	mm
05003525001	1/4"	75,0

8794 LA Zyklop extension with free-turning sleeve, long, 1/4"



Application: 1/4" square drive sockets with ball lock

Design: Easy-to-grip free-turning sleeve for rapid tightening or loosening of screws and nuts, chrome vanadium, brushed chrome-plated finish

	 	mm
05003526001	1/4"	150,0

8789 A Zyklop sliding T-handle, 1/4"



Application: 1/4" square drive sockets with ball lock

Design: Sliding drive, chrome vanadium, brushed chrome-plated finish

	 	mm
05003524001	1/4"	110,0

Tip


How to avoid the need for two socket sets – one for manual and one for machine operations



The manual and machine sockets can be used both for hand and power tools use (non-impact). Users need just one socket set for all applications.



"Flexible-lock-system"



The extensions from the premium lines are also equipped with the unique "flexible-lock-system". By activating this system, attachments can be fixed to the extension permanently – preventing slipping and any unintentional loss of the attachment. When the system is deactivated, the sockets can be attached as usual and changed in a flash.

The free-turning sleeve



The free-turning sleeve effectively speeds up the tightening or loosening of screws and bolts.



8795 A Zyklop universal joint, 1/4"



Application: 1/4" square drive sockets with ball lock

Design: Chrome vanadium/chrome molybdenum, brushed chrome-plated finish

			mm
05003528001	1/4"	35,5	

8794 A Zyklop wobble extension, 1/4"



Application: 1/4" square drive sockets with ball lock

Design: Swivels through 15°, chrome vanadium, brushed chrome-plated finish

			mm
05003527001	1/4"	56,0	

8784 A1 Zyklop Bit adaptor, 1/4"



Application: Suitable for 1/4" hex bits as per DIN ISO 1173-C 6.3 and E 6.3 and Wera series 1 and 4

Design: Quick-release chuck for fast bit changes, chromium vanadium

				mm
05003529001	1/4"	1/4"	37,0	

Tip

How to work well in confined installation areas



The Zyklop wobble extensions pivot through 15° in all directions. This enables rapid and precise work in concealed or confined installation areas.





Zyklop Ratchets, 3/8"



Zyklop Speed

146



Zyklop Metal Push

150



Zyklop Metal Switch

152



Zyklop Accessories


154



The Zyklop Speed Ratchets, $\frac{3}{8}$ "

5 types of ratchet in 1 tool

8100 SB 6 Zyklop Speed Ratchet Set, $\frac{3}{8}$ " drive, metric




29-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Speed Ratchet with $\frac{3}{8}$ " drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 16 bits

05004046001		
8000 B	1 x 3/8"x199,0	
8790 HMB	1 x 8,0x29,0; 1 x 10,0x29,0; 1 x 12,0x29,0; 1 x 13,0x29,0; 1 x 15,0x29,0; 1 x 16,0x30,0; 1 x 17,0x30,0; 1 x 18,0x30,0; 1 x 19,0x30,0	
8794 LB	1 x 3/8"x200,0	
8794 B	1 x 3/8"x76,0	
8784 B1	1 x 1/4"x3/8"x44,0	
851/4 TZ PH	1 x PH 1x50; 1 x PH 2x50; 1 x PH 3x50	
855/4 TZ PZ	1 x PZ 1x50; 1 x PZ 2x50; 1 x PZ 3x50	
867/4 Z TORX®	1 x TX 20x50; 1 x TX 25x50; 1 x TX 27x50; 1 x TX 30x50; 1 x TX 40x50	
840/4 Z Hex-Plus	1 x 4,0x50; 1 x 5,0x50; 1 x 6,0x50; 1 x 8,0x50	
800/4 Z	1 x 1,0x5,5x50	

8100 SB 9 Zyklop Speed Ratchet Set, $\frac{3}{8}$ " drive, imperial



29-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Speed Ratchet with $\frac{3}{8}$ " drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 16 bits

05004049001		
8000 B	1 x 3/8"x199,0	
8790 HMB	1 x 1/4"x29,0; 1 x 5/16"x29,0; 1 x 3/8"x29,0; 1 x 7/16"x29,0; 1 x 1/2"x29,0; 1 x 9/16"x29,0; 1 x 5/8"x30,0; 1 x 11/16"x30,0; 1 x 3/4"x30,0	
8794 LB	1 x 3/8"x200,0	
8794 B	1 x 3/8"x76,0	
8784 B1	1 x 1/4"x3/8"x44,0	
851/4 TZ PH	1 x PH 1x50; 1 x PH 2x50; 1 x PH 3x50	
855/4 TZ PZ	1 x PZ 1x50; 1 x PZ 2x50; 1 x PZ 3x50	
867/4 Z TORX®	1 x TX 20x50; 1 x TX 25x50; 1 x TX 27x50; 1 x TX 30x50; 1 x TX 40x50	
840/4 Z Hex-Plus	1 x 3/16"x50; 1 x 7/32"x50; 1 x 1/4"x50; 1 x 5/16"x50	
800/4 Z	1 x 1,0x5,5x50	

8100 SB 2 Zyklop Speed ratchet set, $\frac{3}{8}$ " drive, metric



43-piece set in strong metal case

1 Zyklop ratchet with $\frac{3}{8}$ " drive, 18 Zyklop sockets (metric), 2 Zyklop "flexible-lock" extensions (short and long) with free-turning sleeve, 1 sliding T-handle, 1 wobble extension, 1 universal joint, 1 adaptor with quick-release chuck, 18 bits

05003594001		
8000 B	1 x 3/8"x199,0	
8790 HMB	1 x 6,0x29,0; 1 x 7,0x29,0; 1 x 8,0x29,0; 1 x 9,0x29,0; 1 x 10,0x29,0; 1 x 11,0x29,0; 1 x 12,0x29,0; 1 x 13,0x29,0; 1 x 14,0x29,0; 1 x 15,0x29,0; 1 x 16,0x30,0; 1 x 17,0x30,0; 1 x 18,0x30,0; 1 x 19,0x30,0; 1 x 20,0x30,0; 1 x 21,0x30,0; 1 x 22,0x30,0; 1 x 24,0x32,0	
8789 B	1 x 3/8"x165,0	
8794 B	1 x 3/8"x76,0	
8795 B	1 x 3/8"x50,0	
8784 B1	1 x 1/4"x3/8"x44,0	
8796 SB	1 x 3/8"x125,0	
8796 LB	1 x 3/8"x200,0	
840/1 Z Hex-Plus	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25; 1 x 8,0x25; 1 x 10,0x25	
867/1 Z TORX® B0	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 27x25; 1 x TX 30x25; 1 x TX 40x25	
800/1 Z	1 x 1,0x5,5x25	
851/1 Z PH	1 x PH 2x25; 1 x PH 3x25	
855/1 Z PZ	1 x PZ 2x25; 1 x PZ 3x25	

Tip

Zyklop "6 in 1"



1. Fine-tooth ratchet
2. Flex-head ratchet
3. Angle ratchet
4. Quick-release ratchet
5. Power ratchet
6. Screwdriver

New set concept



The textile boxes offer dramatically improved portability, and are space-saving to boot! This means you can now carry the same collection of tools, in a much more compact and comfortable package.



The hassle of running back and forth for the right tools has now become a thing of the past. And the much lower weight of a set makes carrying more convenient than ever before. The textile box including the tool will even survive a fall undamaged.



"Take it easy"




"Take it easy" tool finder system – with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).

The Zyklop Speed Ratchets, $\frac{3}{8}$ "

5 types of ratchet in 1 tool

8100 SB 4 Zyklop Speed ratchet set, $\frac{3}{8}$ " drive, imperial




38-piece set in strong metal case

1 Zyklop ratchet with $\frac{3}{8}$ " drive, 12 Zyklop sockets (imperial), 2 Zyklop "flexible-lock" extensions (short and long) with free-turning sleeve, 1 sliding T-handle, 1 wobble extension, 1 universal joint, 1 adaptor with quick-release chuck, 19 bits

05003596001	
8000 B	1 x 3/8"x199,0
8790 HMB	1 x 1/4"x29,0; 1 x 5/16"x29,0; 1 x 11/32"x29,0; 1 x 3/8"x29,0; 1 x 7/16"x29,0; 1 x 1/2"x29,0; 1 x 9/16"x29,0; 1 x 5/8"x30,0; 1 x 11/16"x30,0; 1 x 3/4"x30,0; 1 x 13/16"x30,0; 1 x 7/8"x30,0
8789 B	1 x 3/8"x165,0
8794 B	1 x 3/8"x76,0
8795 B	1 x 3/8"x50,0
8784 B1	1 x 1/4"x3/8"x44,0
8796 SB	1 x 3/8"x125,0
8796 LB	1 x 3/8"x200,0
867/1 Z TORX® B0	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 27x25; 1 x TX 30x25; 1 x TX 40x25
800/1 Z	1 x 1,0x5,5x25
851/1 Z PH	1 x PH 2x25; 1 x PH 3x25
855/1 Z PZ	1 x PZ 2x25; 1 x PZ 3x25
840/1 Z Hex-Plus	1 x 5/64"x25; 1 x 3/32"x25; 1 x 1/8"x25; 1 x 9/64"x25; 1 x 5/32"x25; 1 x 3/16"x25; 1 x 7/32"x25

8000 B Zyklop ratchet with $\frac{3}{8}$ " drive



Application: $\frac{3}{8}$ " square drive sockets and $\frac{3}{8}$ " adaptors with square drive, equipped with ball lock

Design: Flywheel design and easy-to-grip free-turning sleeve for faster work, swivel ratchet head, defined lock positions at 0° and 90° to the left and right as well as at 15° before 90° inwards, at 0° it can be used like a conventional screwdriver, pushbutton release, left/right switchover, fine-tooth design, small return angle of 5°

Handle: Multi-component Kraftform handle ensures minimum fatigue

		mm
05003550001	$\frac{3}{8}$ "	199,0

8000 B SB Zyklop ratchet with $\frac{3}{8}$ " drive

		mm
05073261001	$\frac{3}{8}$ "	199,0





Tip

How to notice missing tools more quickly




Perfectly conceived in every detail: the storage case for the Zyklop Speed ratchet sets! The two-tone foam insert section means that the tools can be quickly and reliably replaced, and that missing tools can be detected immediately. The tools and their position can be clearly seen in the lid where they have been laser-etched, ensuring

that they are legible even when the insert section is covered with grease, dirt or oil. Additionally, the foam section can be removed and placed in the drawer of a tool cabinet or trolley.



“Flexible-lock-system”



The extensions from the premium lines are also equipped with the unique “flexible-lock-system”. By activating this system, attachments can be fixed to the extension permanently – preventing slipping and any unintentional loss of the attachment. When the system is deactivated, the sockets can be attached as usual and changed in a flash.

Is it also possible to reverse the drive with oily hands?




The thumbwheel is designed in such a way that it offers outstanding grip and can, therefore, even be operated with oily fingers.

The Zyklop Metal Ratchets Push, $\frac{3}{8}$ "

With push-through square

8100 SB 7 Zyklop Metal Ratchet Set with push-through square, $\frac{3}{8}$ " drive, metric




29-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with $\frac{3}{8}$ " drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 16 bits

05004047001	
8003 B	1 x 3/8"x222,0
8790 HMB	1 x 8,0x29,0; 1 x 10,0x29,0; 1 x 12,0x29,0; 1 x 13,0x29,0; 1 x 15,0x29,0; 1 x 16,0x30,0; 1 x 17,0x30,0; 1 x 18,0x30,0; 1 x 19,0x30,0
8794 LB	1 x 3/8"x200,0
8794 B	1 x 3/8"x76,0
8784 B1	1 x 1/4"x3/8"x44,0
851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25
867/1 Z TORX®	1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 27x25; 1 x TX 30x25; 1 x TX 40x25
840/1 Z Hex-Plus	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25; 1 x 8,0x25

8100 SB 10 Zyklop Metal Ratchet Set with push-through square, $\frac{3}{8}$ " drive, imperial




29-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with $\frac{3}{8}$ " drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 16 bits

05004050001	
8003 B	1 x 3/8"x222,0
8790 HMB	1 x 1/4"x29,0; 1 x 5/16"x29,0; 1 x 3/8"x29,0; 1 x 7/16"x29,0; 1 x 1/2"x29,0; 1 x 9/16"x29,0; 1 x 5/8"x30,0; 1 x 11/16"x30,0; 1 x 3/4"x30,0
8794 LB	1 x 3/8"x200,0
8794 B	1 x 3/8"x76,0
8784 B1	1 x 1/4"x3/8"x44,0
851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25
867/1 Z TORX®	1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 27x25; 1 x TX 30x25; 1 x TX 40x25
840/1 Z Hex-Plus	1 x 5/32"x25; 1 x 3/16"x25; 1 x 7/32"x25; 1 x 1/4"x25; 1 x 5/16"x25

8003 B Zyklop Metal Ratchet with push-through square and $\frac{3}{8}$ " drive



Application: $\frac{3}{8}$ " square sockets as well as for $\frac{3}{8}$ " adaptors with square drive, with ball locking device

Design: Forged, full metal ratchet (chrome-molybdenum) that is extremely robust with a long service life; slim design to enable work in very confined spaces; the dual-ratchet-teeth design means that a 76 fine-toothing division can be achieved from the 38 robust teeth with a return angle of only 4.7°; simple direction change with the undetachable push-through square and very secure socket lock mechanism

				
	mm	mm	mm	mm
05004033001	$\frac{3}{8}$ "	222,0	27	29

Tip

The Zyklop Metal Ratchets Push



Forged, full metal ratchet (chrome-molybdenum) that is extremely robust with a long service life; slim design to enable work in very confined spaces.

Textile boxes



The textile boxes offer dramatically improved portability, and are space-saving to boot!

This means you can now carry the same collection of tools, in a much more compact and comfortable package. The hassle of running back and forth for the right tools has now become a thing of the past. And the much lower weight of a set makes carrying more convenient than ever before. The textile box including the tool will even survive a fall undamaged. And: it leaves absolutely no signs of scratches on sensitive surfaces.



"Take it easy"



"Take it easy" tool finder system – with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).

The Zyklop Metal Ratchets Switch, $\frac{3}{8}$ "

With switch lever

8100 SB 8 Zyklop Metal Ratchet Set with switch lever, $\frac{3}{8}$ " drive, metric



29-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with $\frac{3}{8}$ " drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 16 bits

05004048001		
8004 B	1 x 3/8"x222,0	
8790 HMB	1 x 8,0x29,0; 1 x 10,0x29,0; 1 x 12,0x29,0; 1 x 13,0x29,0; 1 x 15,0x29,0; 1 x 16,0x30,0; 1 x 17,0x30,0; 1 x 18,0x30,0; 1 x 19,0x30,0	
8794 LB	1 x 3/8"x200,0	
8794 B	1 x 3/8"x76,0	
8784 B1	1 x 1/4"x3/8"x44,0	
851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25	
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25	
867/1 Z TORX®	1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 27x25; 1 x TX 30x25; 1 x TX 40x25	
840/1 Z Hex-Plus	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25; 1 x 8,0x25	

8100 SB 11 Zyklop Metal Ratchet Set with switch lever, $\frac{3}{8}$ " drive, imperial



29-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with $\frac{3}{8}$ " drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 16 bits

05004051001		
8004 B	1 x 3/8"x222,0	
8790 HMB	1 x 1/4"x29,0; 1 x 5/16"x29,0; 1 x 3/8"x29,0; 1 x 7/16"x29,0; 1 x 1/2"x29,0; 1 x 9/16"x29,0; 1 x 5/8"x30,0; 1 x 11/16"x30,0; 1 x 3/4"x30,0	
8794 LB	1 x 3/8"x200,0	
8794 B	1 x 3/8"x76,0	
8784 B1	1 x 1/4"x3/8"x44,0	
851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25	
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25	
867/1 Z TORX®	1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 27x25; 1 x TX 30x25; 1 x TX 40x25	
840/1 Z Hex-Plus	1 x 5/32"x25; 1 x 3/16"x25; 1 x 7/32"x25; 1 x 1/4"x25; 1 x 5/16"x25	

8004 B Zyklop Metal Ratchet with switch lever and $\frac{3}{8}$ " drive



Application: $\frac{3}{8}$ " square sockets as well as for $\frac{3}{8}$ " adaptors with square drive, with ball locking device

Design: Forged, full metal ratchet (chrome-molybdenum) that is extremely robust with a long service life; slim design to enable work in very confined spaces; fine-tooth mechanism with 72 teeth for a return angle of only 5°; switch lever for convenient change of direction; secure socket locking function

				
05004034001	$\frac{3}{8}$ "	222,0 mm	26 mm	29 mm

Tip

The Zyklop Metal Ratchets Switch



Extremely slim. Long leverage. Very robust without any torque limitation. Forged, full metal ratchet out of chrome molybdenum.

Textile boxes



The textile boxes offer dramatically improved portability, and are space-saving to boot!

This means you can now carry the same collection of tools, in a much more compact and comfortable package. The hassle of running back and forth for the right tools has now become a thing of the past. And the much lower weight of a set makes carrying more convenient than ever before. The textile box including the tool will even survive a fall undamaged. And: it leaves absolutely no signs of scratches on sensitive surfaces.



"Take it easy"



"Take it easy" tool finder system – with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).

Zyklop Accessories, $\frac{3}{8}$ "

The perfect add-on for all Zyklop ratchets

8790 HMB Zyklop $\frac{3}{8}$ " socket



Application: Hexagon headed bolts, screws and nuts

Design: Manual and (non-impact) machine applications, ball intercept ring, knurls at base for precision handling in manual operations, chrome vanadium, brushed chrome-plated finish
Take it easy toolfinder: Colour coding to enable the desired socket to be easily located.

		mm	mm	mm	mm	mm
05003551001		6,0		29,0	10,5	18,0
05003552001		7,0		29,0	11,0	18,0
05003553001		8,0		29,0	12,2	18,0
05003554001		9,0		29,0	13,5	18,0
05003555001		10,0		29,0	14,5	18,0
05003556001		11,0		29,0	16,0	18,0
05003557001		12,0		29,0	17,0	18,0
05003558001		13,0		29,0	18,5	20,0
05003559001		14,0		29,0	19,5	22,0
05003560001		15,0		29,0	21,0	24,0
05003561001		16,0		30,0	22,0	24,0
05003562001		17,0		30,0	23,5	24,0
05003563001		18,0		30,0	24,5	24,0
05003564001		19,0		30,0	26,0	24,0
05003565001		20,0		30,0	28,0	25,0
05003566001		21,0		30,0	28,0	25,0
05003567001		22,0		30,0	32,0	25,0
05003568001		24,0		32,0	32,0	25,0
05003569001			$\frac{1}{4}$ "	29,0	11,0	18,0
05003570001			$\frac{5}{16}$ "	29,0	12,2	18,0
05003571001			$\frac{11}{32}$ "	29,0	13,5	18,0
05003572001			$\frac{3}{8}$ "	29,0	14,5	18,0
05003573001			$\frac{7}{16}$ "	29,0	16,0	18,0
05003574001			$\frac{1}{2}$ "	29,0	18,5	20,0
05003575001			$\frac{9}{16}$ "	29,0	19,5	22,0
05003576001			$\frac{5}{8}$ "	30,0	22,0	24,0
05003577001			$\frac{11}{16}$ "	30,0	23,0	24,0
05003578001			$\frac{3}{4}$ "	30,0	26,0	24,0
05003579001			$\frac{13}{16}$ "	30,0	28,0	25,0
05003580001			$\frac{7}{8}$ "	30,0	32,0	25,0

8796 SB Zyklop "flexible-lock" extension with free-turning sleeve, short, $\frac{3}{8}$ "



Application: $\frac{3}{8}$ " square drive sockets with ball lock

Design: Flexible lock system either for permanent interlocking or fast change of accessories, free-turning sleeve for rapid tightening or loosening of screws and nuts, chrome vanadium, brushed chrome-plated finish

		mm
05003591001	$\frac{3}{8}$ "	125,0

8796 LB Zyklop "flexible-lock" extension with free-turning sleeve, long, $\frac{3}{8}$ "



Application: $\frac{3}{8}$ " square drive sockets with ball lock

Design: Flexible lock system either for permanent interlocking or fast change of accessories, free-turning sleeve for rapid tightening or loosening of screws and nuts, chrome vanadium, brushed chrome-plated finish

		mm
05003592001	$\frac{3}{8}$ "	200,0

8794 SB Zyklop extension with free-turning sleeve, short, $\frac{3}{8}$ "



Application: $\frac{3}{8}$ " square drive sockets with ball lock

Design: Easy-to-grip free-turning sleeve for rapid tightening or loosening of screws and nuts, chrome vanadium, brushed chrome-plated finish

05003582001	$\frac{3}{8}$ "	125,0

8794 LB Zyklop extension with free-turning sleeve, long, $\frac{3}{8}$ "



Application: $\frac{3}{8}$ " square drive sockets with ball lock

Design: Easy-to-grip free-turning sleeve for rapid tightening or loosening of screws and nuts, chrome vanadium, brushed chrome-plated finish

05003583001	$\frac{3}{8}$ "	200,0

Tip


How to avoid the need for two socket sets – one for manual and one for machine operations



The manual and machine sockets can be used both for hand and power tools use (non-impact). Users need just one socket set for all applications.



"Flexible-lock-system"



The extensions from the premium lines are also equipped with the unique "flexible-lock-system". By activating this system, attachments can be fixed to the extension permanently – preventing slipping and any unintentional loss of the attachment. When the system is deactivated, the sockets can be attached as usual and changed in a flash.

The free-turning sleeve



The free-turning sleeve effectively speeds up the tightening or loosening of screws and bolts.

Zyklop accessories, $\frac{3}{8}$ "

The perfect add-on for all Zyklop ratchets

8784 B1 Zyklop Bit adaptor, $\frac{3}{8}$ "



Application: Suitable for $\frac{1}{4}$ " hex bits as per DIN ISO 1173-C 6.3 and E 6.3 and Wera series 1 and 4

Design: Quick-release chuck for fast bit changes, chromium vanadium

			mm
05003590001	$\frac{1}{4}$ "	$\frac{3}{8}$ "	44,0

8789 B Zyklop sliding T-handle, $\frac{3}{8}$ "



Application: $\frac{3}{8}$ " square drive sockets with ball lock

Design: Sliding drive, chrome vanadium, brushed chrome-plated finish

		mm
05003581001	$\frac{3}{8}$ "	165,0

8795 B Zyklop universal joint, $\frac{3}{8}$ "



Application: $\frac{3}{8}$ " square drive sockets with ball lock

Design: Chrome vanadium/chrome molybdenum, brushed chrome-plated finish

		mm
05003585001	$\frac{3}{8}$ "	50,0

8794 B Zyklop wobble extension, $\frac{3}{8}$ "



Application: $\frac{3}{8}$ " square drive sockets with ball lock

Design: Swivels through 15°, chrome vanadium, brushed chrome-plated finish

		mm
05003584001	$\frac{3}{8}$ "	76,0





Zyklop Ratchets, 1/2"


	Zyklop Speed	160
	Zyklop Hybrid Ratchet	164
	Zyklop Metal Push	166
	Zyklop Metal Switch	168
	Zyklop Accessories	170
	1/2" Koloss ratchet with hammer function	176



The Zyklop Speed Ratchets, 1/2"

5 types of ratchet in 1 tool

8100 SC 6 Zyklop Speed Ratchet Set, 1/2" drive, metric




28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Speed Ratchet with 1/2" drive, 10 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 14 bits

05004076001		
8000 C	1 x 1/2"x277,0	
8790 HMC	1 x 10,0x37,0; 1 x 11,0x37,0; 1 x 12,0x37,0; 1 x 13,0x37,0; 1 x 14,0x37,0; 1 x 15,0x37,0; 1 x 16,0x37,0; 1 x 17,0x37,0; 1 x 18,0x37,0; 1 x 19,0x37,0	
8794 LC	1 x 1/2"x250,0	
8794 C	1 x 1/2"x52,0	
8784 C2	1 x 5/16"x1/2"x50,0	
851/2 Z PH	1 x PH 2x32; 1 x PH 3x32	
855/2 Z PZ	1 x PZ 2x32; 1 x PZ 3x32	
867/2 Z TORX®	1 x TX 20x35; 1 x TX 25x35; 1 x TX 30x35; 1 x TX 40x35; 1 x TX 45x35; 1 x TX 50x35	
840/2 Z	1 x 5x30; 1 x 6x30; 1 x 8x30; 1 x 10x30	

8100 SC 9 Zyklop Speed Ratchet Set, 1/2" drive, imperial



28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Speed Ratchet with 1/2" drive, 10 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 14 bits

05004079001		
8000 C	1 x 1/2"x277,0	
8790 HMC	1 x 3/8"x37,0; 1 x 7/16"x37,0; 1 x 1/2"x37,0; 1 x 9/16"x37,0; 1 x 19/32"x37,0; 1 x 5/8"x37,0; 1 x 11/16"x37,0; 1 x 3/4"x37,0; 1 x 25/32"x37,0; 1 x 13/16"x37,0	
8794 LC	1 x 1/2"x250,0	
8794 C	1 x 1/2"x52,0	
8784 C2	1 x 5/16"x1/2"x50,0	
851/2 Z PH	1 x PH 2x32; 1 x PH 3x32	
855/2 Z PZ	1 x PZ 2x32; 1 x PZ 3x32	
867/2 Z TORX®	1 x TX 20x35; 1 x TX 25x35; 1 x TX 30x35; 1 x TX 40x35; 1 x TX 45x35; 1 x TX 50x35	
840/2 Z	1 x 7/32"x30; 1 x 1/4"x30; 1 x 5/16"x30; 1 x 3/8"x30	

8100 SC 2 Zyklop Speed ratchet set, 1/2" drive, metric



37-piece set in strong metal case

1 Zyklop ratchet with 1/2" drive, 17 Zyklop sockets (metric),

2 Zyklop "flexible-lock" extensions (short and long) with free-tuning sleeve,
1 sliding T-handle, 1 universal joint, 1 wobble extension, 1 adaptor with
quick-release chuck, 13 bits

05003645001	
8000 C	1 x 1/2"x277,0
8790 HMC	1 x 10,0x37,0; 1 x 11,0x37,0; 1 x 12,0x37,0; 1 x 13,0x37,0; 1 x 14,0x37,0; 1 x 15,0x37,0; 1 x 16,0x37,0; 1 x 17,0x37,0; 1 x 18,0x37,0; 1 x 19,0x37,0; 1 x 20,0x37,0; 1 x 21,0x37,0; 1 x 22,0x37,0; 1 x 24,0x37,0; 1 x 27,0x40,0; 1 x 30,0x42,0; 1 x 32,0x42,0
8789 C	1 x 1/2"x250,0
8794 C	1 x 1/2"x52,0
8795 C	1 x 1/2"x69,0
8784 C2	1 x 5/16"x1/2"x50,0
8796 SC	1 x 1/2"x125,0
8796 LC	1 x 1/2"x250,0
840/2 Z	1 x 5x30; 1 x 6x30; 1 x 8x30; 1 x 10x30
851/2 Z PH	1 x PH 3x32
855/2 Z PZ	1 x PZ 3x32
867/2 Z TORX®	1 x TX 20x35; 1 x TX 25x35; 1 x TX 30x35; 1 x TX 40x35; 1 x TX 45x35; 1 x TX 50x35; 1 x TX 55x35

Tip

Zyklop "6 in 1"



1. Fine-tooth ratchet
2. Flex-head ratchet
3. Angle ratchet
4. Quick-release ratchet
5. Power ratchet
6. Screwdriver

New set concept



The textile boxes offer dramatically improved portability, and are space-saving to boot! This means you can now carry the same collection of tools, in a much more compact and comfortable package.



The hassle of running back and forth for the right tools has now become a thing of the past. And the much lower weight of a set makes carrying more convenient than ever before. The textile box including the tool will even survive a fall undamaged.



"Take it easy"




"Take it easy" tool finder system – with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).

The Zyklop Speed Ratchets, 1/2"

5 types of ratchet in 1 tool

8100 SC 4 Zyklop Speed ratchet set, 1/2" drive, imperial



38-piece set in strong metal case

1 Zyklop ratchet with 1/2" drive, 18 Zyklop sockets (imperial),

2 Zyklop "flexible-lock" extensions (short and long) with free-tuning sleeve, 1 sliding T-handle, 1 universal joint, 1 wobble extension, 1 adaptor with quick-release chuck, 13 bits

05003647001	
8000 C	1 x 1/2"x277,0
8790 HMC	1 x 3/8"x37,0; 1 x 7/16"x37,0; 1 x 1/2"x37,0; 1 x 9/16"x37,0; 1 x 19/32"x37,0; 1 x 5/8"x37,0; 1 x 11/16"x37,0; 1 x 3/4"x37,0; 1 x 25/32"x37,0; 1 x 13/16"x37,0; 1 x 7/8"x37,0; 1 x 15/16"x37,0; 1 x 31/32"x37,0; 1 x 1"x40,0; 1 x 1 1/16"x40,0; 1 x 1 1/8"x40,0; 1 x 1 3/16"x42,0; 1 x 1 1/4"x42,0
8789 C	1 x 1/2"x250,0
8794 C	1 x 1/2"x52,0
8795 C	1 x 1/2"x69,0
8784 C2	1 x 5/16"x1/2"x50,0
8796 SC	1 x 1/2"x125,0
8796 LC	1 x 1/2"x250,0
851/2 Z PH	1 x PH 3x32
855/2 Z PZ	1 x PZ 3x32
867/2 Z TORX®	1 x TX 20x35; 1 x TX 25x35; 1 x TX 30x35; 1 x TX 40x35; 1 x TX 45x35; 1 x TX 50x35; 1 x TX 55x35
840/2 Z	1 x 7/32"x30; 1 x 1/4"x30; 1 x 5/16"x30; 1 x 3/8"x30

8000 C Zyklop Speed ratchet with 1/2" drive



Application: 1/2" square drive sockets and 1/2" adapters with square drive, equipped with ball lock

Design: Flywheel design and easy-to-grip free-turning sleeve for faster work, swivel ratchet head, defined lock positions at 0° and 90° to the left and right as well as at 15° before 90° inwards, at 0° it can be used like a conventional screwdriver, pushbutton release, left/right switchover, fine-tooth design, small return angle of 5°

Handle: Multi-component Kraftform handle ensures minimum fatigue

05003600001	1/2"	277,0

8000 C SB Zyklop ratchet with 1/2" drive

05073262001	1 x 1/2"x277,0	4013288 128058





The Zyklop Hybrid Ratchets, 1/2"

8006 SC 1 Zyklop Hybrid Ratchet Set, 1/2" drive, metric



13-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Hybrid Ratchet with 1/2" drive, 10 Zyklop sockets with holding function, 1 Zyklop Hybrid Extension with release pin, 1 Zyklop extension (long) with free-turning sleeve

05004090001		
	8006 C	1 x 1/2"x281,0
	8797 C	1 x 271,0
	8794 LC	1 x 1/2"x250,0
	8790 HMC HF	1 x 10,0x37,0; 1 x 11,0x37,0; 1 x 12,0x37,0; 1 x 13,0x37,0; 1 x 14,0x37,0; 1 x 15,0x37,0; 1 x 16,0x37,0; 1 x 17,0x37,0; 1 x 18,0x37,0; 1 x 19,0x37,0

Zyklop Hybrid Set



Application: Ratchet function for 1/2" square sockets and 1/2" adaptors with square drive, equipped with ball lock

Design: Fine-tooth mechanism with 72 teeth for a return angle of only 5°; switch lever for convenient change of direction; secure socket locking function

Handle: Multi-component Kraftform handle for optimum pressure, impact and tensile loads, handle end designed for connection of Zyklop Hybrid extension 8797 C

05004095001		
	8006 C	1 x 1/2"x281,0
	8797 C	1 x 271,0

8006 C Zyklop Hybrid Ratchet with switch lever and 1/2" drive



Application: 1/2" square sockets as well as for 1/2" adaptors with square drive, with ball locking device

Design: Fine-tooth mechanism with 72 teeth for a return angle of only 5°; switch lever for convenient change of direction; secure socket locking function

Handle: Multi-component Kraftform handle for optimum pressure and tensile loads; handle end designed for connection of Zyklop Hybrid extension

				
	mm	mm	mm	mm
05003780001	1/2"	281,0	34	37

8797 C Zyklop Hybrid extension



Application: Extension for use with Wera Zyklop Hybrid 8006 C to increase torque transfer

Design: Tough, tempered Cr-Mo steel

Handle: Multi-component Kraftform handle for optimum pressure and tensile loads; with extension release pin

		
	mm	mm
05003781001	134,0	137

Tip



"Take it easy"



"Take it easy" tool finder system – with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).



Secure hold and easy removal




The all new smooth turning mechanism guarantees both secure and rattle-free storage, yet allows easy removal of the tool.

The Zyklop Metal Ratchets Push, 1/2"

With push-through square

8100 SC 7 Zyklop Metal Ratchet Set with push-through square, 1/2" drive, metric




28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with push-through square and 1/2" drive, 10 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 14 bits

05004077001	
8003 C	1 x 1/2"x281,0
8790 HMC	1 x 10,0x37,0; 1 x 11,0x37,0; 1 x 12,0x37,0; 1 x 13,0x37,0; 1 x 14,0x37,0; 1 x 15,0x37,0; 1 x 16,0x37,0; 1 x 17,0x37,0; 1 x 18,0x37,0; 1 x 19,0x37,0
8794 LC	1 x 1/2"x250,0
8794 C	1 x 1/2"x52,0
8784 C2	1 x 5/16"x1/2"x50,0
851/2 Z PH	1 x PH 2x32; 1 x PH 3x32
867/2 Z TORX®	1 x TX 20x35; 1 x TX 25x35; 1 x TX 27x35; 1 x TX 30x35; 1 x TX 40x35; 1 x TX 45x35; 1 x TX 50x35; 1 x TX 55x35
840/2 Z	1 x 5x30; 1 x 6x30; 1 x 8x30; 1 x 10x30

8100 SC 10 Zyklop Metal Ratchet Set with push-through square, 1/2" drive, imperial




28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with push-through square and 1/2" drive, 10 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 14 bits

05004080001	
8003 C	1 x 1/2"x281,0
8790 HMC	1 x 3/8"x37,0; 1 x 7/16"x37,0; 1 x 1/2"x37,0; 1 x 9/16"x37,0; 1 x 19/32"x37,0; 1 x 5/8"x37,0; 1 x 11/16"x37,0; 1 x 3/4"x37,0; 1 x 25/32"x37,0; 1 x 13/16"x37,0
8794 LC	1 x 1/2"x250,0
8794 C	1 x 1/2"x52,0
8784 C2	1 x 5/16"x1/2"x50,0
851/2 Z PH	1 x PH 2x32; 1 x PH 3x32
867/2 Z TORX®	1 x TX 20x35; 1 x TX 25x35; 1 x TX 27x35; 1 x TX 30x35; 1 x TX 40x35; 1 x TX 45x35; 1 x TX 50x35; 1 x TX 55x35
840/2 Z	1 x 7/32"x30; 1 x 1/4"x30; 1 x 5/16"x30; 1 x 3/8"x30

8003 C Zyklop Metal Ratchet with push-through square and 1/2" drive



Application: 1/2" square sockets as well as for 1/2" adaptors with square drive, with ball locking device

Design: Forged, full metal ratchet (chrome-molybdenum) that is extremely robust with a long service life; slim design to enable work in very confined spaces; the dual-ratchet-teeth design means that a 76 fine-toothing division can be achieved from the 38 robust teeth with a return angle of only 4.7°; simple direction change with the undetachable push-through square and very secure socket lock mechanism

		mm	mm	mm
05004063001	1/2"	281,0	36	37

Tip

The Zyklop Metal Ratchets Push



Forged, full metal ratchet (chrome-molybdenum) that is extremely robust with a long service life; slim design to enable work in very confined spaces.

Textile boxes



The textile boxes offer dramatically improved portability, and are space-saving to boot!

This means you can now carry the same collection of tools, in a much more compact and comfortable package. The hassle of running back and forth for the right tools has now become a thing of the past. And the much lower weight of a set makes carrying more convenient than ever before. The textile box including the tool will even survive a fall undamaged. And: it leaves absolutely no signs of scratches on sensitive surfaces.



TAKE IT EASY
TOOL FINDER

"Take it easy"




"Take it easy" tool finder system – with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).

The Zyklop Metal Ratchets Switch, 1/2"

With switch lever

8100 SC 8 Zyklop Metal Ratchet Set with switch lever, 1/2" drive, metric




28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with switch lever and 1/2" drive, 10 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 14 bits

05004078001		
8004 C	1 x 1/2"x281,0	
8790 HMC	1 x 10,0x37,0; 1 x 11,0x37,0; 1 x 12,0x37,0; 1 x 13,0x37,0; 1 x 14,0x37,0; 1 x 15,0x37,0; 1 x 16,0x37,0; 1 x 17,0x37,0; 1 x 18,0x37,0; 1 x 19,0x37,0	
8794 LC	1 x 1/2"x250,0	
8794 C	1 x 1/2"x52,0	
8784 C2	1 x 5/16"x1/2"x50,0	
851/2 Z PH	1 x PH 2x32; 1 x PH 3x32	
867/2 Z TORX®	1 x TX 20x35; 1 x TX 25x35; 1 x TX 27x35; 1 x TX 30x35; 1 x TX 40x35; 1 x TX 45x35; 1 x TX 50x35; 1 x TX 55x35	
840/2 Z	1 x 5x30; 1 x 6x30; 1 x 8x30; 1 x 10x30	

8100 SC 11 Zyklop Metal Ratchet Set with switch lever, 1/2" drive, imperial




28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with switch lever and 1/2" drive, 10 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 14 bits

05004081001		
8004 C	1 x 1/2"x281,0	
8790 HMC	1 x 3/8"x37,0; 1 x 7/16"x37,0; 1 x 1/2"x37,0; 1 x 9/16"x37,0; 1 x 19/32"x37,0; 1 x 5/8"x37,0; 1 x 11/16"x37,0; 1 x 3/4"x37,0; 1 x 25/32"x37,0; 1 x 13/16"x37,0	
8794 LC	1 x 1/2"x250,0	
8794 C	1 x 1/2"x52,0	
8784 C2	1 x 5/16"x1/2"x50,0	
851/2 Z PH	1 x PH 2x32; 1 x PH 3x32	
867/2 Z TORX®	1 x TX 20x35; 1 x TX 25x35; 1 x TX 27x35; 1 x TX 30x35; 1 x TX 40x35; 1 x TX 45x35; 1 x TX 50x35; 1 x TX 55x35	
840/2 Z	1 x 7/32"x30; 1 x 1/4"x30; 1 x 5/16"x30; 1 x 3/8"x30	

8004 C Zyklop Metal Ratchet with switch lever and 1/2" drive



Application: 1/2" square sockets as well as for 1/2" adaptors with square drive, with ball locking device

Design: Forged, full metal ratchet (chrome-molybdenum) that is extremely robust with a long service life; slim design to enable work in very confined spaces; fine-tooth mechanism with 72 teeth for a return angle of only 5°; switch lever for convenient change of direction; secure socket locking function

		mm	mm	mm
05004064001	1/2"	281,0	34	37

Tip

The Zyklop Metal Ratchets Switch



Extremely slim. Long leverage. Very robust without any torque limitation. Forged, full metal ratchet out of chrome molybdenum.

Textile boxes



The textile boxes offer dramatically improved portability, and are space-saving to boot!

This means you can now carry the same collection of tools, in a much more compact and comfortable package. The hassle of running back and forth for the right tools has now become a thing of the past. And the much lower weight of a set makes carrying more convenient than ever before. The textile box including the tool will even survive a fall undamaged. And: it leaves absolutely no signs of scratches on sensitive surfaces.



"Take it easy"



"Take it easy" tool finder system – with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).

Zyklop Accessories, 1/2"

The perfect add-on for all Zyklop ratchets

8790 HMC Zyklop socket with 1/2" drive



Application: Hexagon headed bolts, screws and nuts

Design: Manual and (non-impact) machine applications, ball intercept ring, knurls at base for precision handling in manual operations, chrome vanadium, brushed chrome-plated finish. Colour coding to enable the desired bit socket to be easily located

							
		mm	mm	mm	mm	mm	mm
05003601001		10,0	37,0	15,5	24,0	17,0	
05003602001		11,0	37,0	16,5	24,0	17,0	
05003603001		12,0	37,0	17,5	24,0	17,0	
05003604001		13,0	37,0	19,0	24,0	17,0	
05003605001		14,0	37,0	20,0	24,0	17,0	
05003606001		15,0	37,0	21,0	24,0	17,0	
05003607001		16,0	37,0	22,5	24,0	17,0	
05003608001		17,0	37,0	24,0	26,0	17,0	
05003609001		18,0	37,0	25,0	26,0	17,0	
05003610001		19,0	37,0	26,5	26,0	20,0	
05003611001		20,0	37,0	28,0	26,0	20,0	
05003612001		21,0	37,0	29,0	26,0	20,0	
05003613001		22,0	37,0	30,5	26,0	20,0	
05003614001		24,0	37,0	33,0	28,0	20,0	
05003615001		27,0	40,0	36,5	32,0	23,0	
05003616001		30,0	42,0	40,0	34,0	25,0	
05003617001		32,0	42,0	42,0	36,0	25,0	
05003618001		3/8"	37,0	15,5	24,0	17,0	
05003619001		7/16"	37,0	16,5	24,0	17,0	
05003620001		1/2"	37,0	19,0	24,0	17,0	
05003621001		9/16"	37,0	20,0	24,0	17,0	
05003622001		19/32"	37,0	21,0	24,0	17,0	
05003623001		5/8"	37,0	22,5	24,0	17,0	
05003624001		11/16"	37,0	25,5	26,0	17,0	
05003625001		3/4"	37,0	26,5	26,0	20,0	
05003626001		25/32"	37,0	28,0	26,0	20,0	
05003627001		13/16"	37,0	29,0	26,0	20,0	
05003628001		7/8"	37,0	30,5	26,0	20,0	
05003629001		15/16"	37,0	33,0	28,0	20,0	
05003630001		31/32"	37,0	33,0	28,0	20,0	
05003631001		1"	40,0	36,5	32,0	23,0	
05003632001		1 1/16"	40,0	36,5	32,0	23,0	
05003633001		1 1/8"	40,0	40,0	34,0	23,0	
05003634001		1 3/16"	42,0	40,0	34,0	25,0	
05003635001		1 1/4"	42,0	42,0	36,0	25,0	

8790 HMC HF Zyklop socket with 1/2" drive with holding function



Application: Hexagon headed bolts, screws and nuts

Design: Manual and (non-impact) machine applications, ball intercept ring, knurls at base for precision handling in manual operations, with holding function, chrome vanadium, brushed chrome-plated finish. Colour coding to enable the desired bit socket to be easily located

						
		mm	mm	mm	mm	mm
05003730001		10,0	37,0	17,8	23,5	10,4
05003731001		11,0	37,0	18,8	23,5	10,4
05003732001		12,0	37,0	20,4	23,5	11,4
05003733001		13,0	37,0	21,4	23,5	11,4
05003734001		14,0	37,0	22,6	23,5	11,4
05003735001		15,0	37,0	23,6	23,5	12,0
05003736001		16,0	37,0	25,0	23,5	12,0
05003737001		17,0	37,0	26,8	23,5	12,5
05003738001		18,0	37,0	28,0	23,5	12,5
05003739001		19,0	37,0	29,2	23,5	14,0

8790 HF 1 Zyklop socket set with holding function



10-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

10 Zyklop sockets with $\frac{1}{2}$ " drive with holding function

05004203001	
	8790 HMC HF 1 x 10,0x37,0; 1 x 11,0x37,0; 1 x 12,0x37,0; 1 x 13,0x37,0; 1 x 14,0x37,0; 1 x 15,0x37,0; 1 x 16,0x37,0; 1 x 17,0x37,0; 1 x 18,0x37,0; 1 x 19,0x37,0

Tip

Sockets with retaining function for hexagon headed bolts, screws and nuts



The clamping of the screw is achieved by two flexible locking balls and a robust, permanently elastic, heat-shrunk tubing. The tubing is effectively protected against mechanical wear and tear by a steel ring. The holding function is especially helpful in confined, hard-to-reach spaces, where there is no room for a second hand to secure the screw.



"Take it easy"



"Take it easy" tool finder system – with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).



Secure hold and easy removal




The all new smooth turning mechanism of the Zyklop HF Socket sets guarantees both secure and rattle-free storage, yet allows easy removal of the tool.

Zyklop Accessories, 1/2"

The perfect add-on for all Zyklop ratchets

8767 C HF TORX® Zyklop bit socket with 1/2" drive with holding function

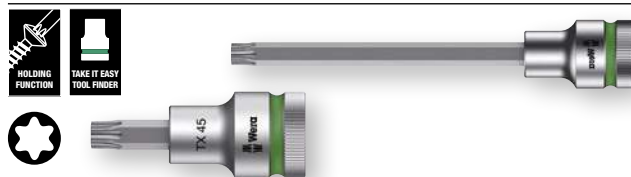

Application: TORX® socket screws

Design: Manual and (non-impact) machine applications, ball intercept ring, knurls at base for precision handling in manual operations, chrome vanadium, brushed chrome-plated finish, holding function for TORX® screws made according to Acument Intellectual Properties specifications. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily located

			mm	mm	mm
05003830001		TX 20	60,0	16,4	23,5
05003850001		TX 20	140,0	16,4	101,5
05003831001		TX 25	60,0	16,4	23,5
05003851001		TX 25	140,0	16,4	101,5
05003832001		TX 27	60,0	16,4	23,5
05003852001		TX 27	140,0	16,4	101,5
05003833001		TX 30	60,0	16,4	23,5
05003853001		TX 30	140,0	16,4	101,5
05003834001		TX 40	60,0	16,4	23,5
05003854001		TX 40	140,0	16,4	101,5
05003835001		TX 45	60,0	16,4	23,5
05003855001		TX 45	140,0	16,4	101,5
05003836001		TX 50	60,0	21,4	23,5
05003856001		TX 50	140,0	21,4	101,5
05003837001		TX 55	60,0	21,4	23,5
05003857001		TX 55	140,0	21,4	101,5
05003838001		TX 60	60,0	21,4	23,5
05003858001		TX 60	140,0	21,4	101,5

8767 C TORX® HF 1 Zyklop bit socket set with 1/2" drive, with holding function



9-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

9 Zyklop bit sockets for TORX® screws, with 1/2" drive, with holding function

05004202001		
	8767 C HF	1 x TX 20x60; 1 x TX 25x60; 1 x TX 27x60; 1 x TX 30x60; 1 x TX 40x60; 1 x TX 45x60; 1 x TX 50x60; 1 x TX 55x60; 1 x TX 60x60

8740 C HF Zyklop bit socket with 1/2" drive with holding function



Application: Hexagon socket screws

Design: Manual and (non-impact) machine applications, ball intercept ring, knurls at base for precision handling in manual operations, chrome vanadium, brushed chrome-plated finish, holding function for hexagon socket screws. Colour coding to enable the desired bit socket to be easily located

		mm	mm	mm	mm
05003820001		4,0	60,0	14,0	21,5
05003840001		4,0	140,0	14,0	101,5
05003821001		5,0	60,0	14,0	21,5
05003841001		5,0	140,0	14,0	101,5
05003822001		6,0	60,0	14,0	21,5
05003842001		6,0	140,0	14,0	101,5
05003823001		7,0	60,0	14,0	23,5
05003843001		7,0	140,0	14,0	101,5
05003824001		8,0	60,0	16,0	23,5
05003844001		8,0	140,0	16,0	101,5
05003825001		10,0	60,0	16,0	23,5
05003845001		10,0	140,0	16,0	101,5
05003826001		12,0	60,0	21,0	23,5
05003827001		14,0	60,0	22,0	23,5
05003828001		17,0	60,0	24,5	25,5
05003829001		19,0	60,0	26,5	27,5

8740 C HF 1 Zyklus bit socket set with 1/2" drive with holding function



9-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

9 Zyklus bit sockets for hexagon socket screws, with 1/2" drive, with holding function

05004201001	
8740 C HF	1 x 4,0x60,0; 1 x 5,0x60,0; 1 x 6,0x60,0; 1 x 7,0x60,0; 1 x 8,0x60,0; 1 x 10,0x60,0; 1 x 12,0x60,0; 1 x 14,0x60,0; 1 x 17,0x60,0

8796 SC Zyklus „flexible-lock“ extension with free-turning sleeve, short, 1/2"



Application: 1/2" square drive sockets with ball lock

Design: Flexible lock system either for permanent interlocking or fast change of accessories, free-turning sleeve for rapid tightening or loosening of screws and nuts, chrome vanadium, brushed chrome-plated finish

05003642001	
1/2"	125,0

Tip

Bit sockets with holding function for TORX® screws



The HF tools developed by Wera are ideal because they feature an optimised geometry of the original TORX® profile. The wedging forces resulting from the surface pressure between the drive tip and the screw profile mean that TORX® screws made according to Acument Intellectual Properties specifications are securely held on the tool!

Bit sockets with retaining function for hexagon socket screws



The clamping of the screw is achieved by a flexible locking ball. The holding function is especially helpful in confined, hard-to-reach spaces, where there is no room for a second hand to secure the screw.



Secure hold and easy removal



The all new smooth turning mechanism of the Zyklus HF socket sets guarantees both secure and rattle-free storage, yet allows easy removal of the tool.

Zyklop Accessories, 1/2"

The perfect add-on for all Zyklop ratchets

8796 LC Zyklop "flexible-lock" extension with free-turning sleeve, long, 1/2"



Application: 1/2" square drive sockets with ball lock

Design: Flexible lock system either for permanent interlocking or fast change of accessories, free-turning sleeve for rapid tightening or loosening of screws and nuts, chrome vanadium, brushed chrome-plated finish

		mm
05003643001	1/2"	250,0

8794 LC Zyklop extension with free-turning sleeve, long, 1/2"



Application: 1/2" square drive sockets with ball lock

Design: Easy-to-grip free-turning sleeve for rapid tightening or loosening of screws and nuts, chrome vanadium, brushed chrome-plated finish

		mm
05003638001	1/2"	250,0

8794 SC Zyklop extension with free-turning sleeve, short, 1/2"



Application: 1/2" square drive sockets with ball lock

Design: Easy-to-grip free-turning sleeve for rapid tightening or loosening of screws and nuts, chrome vanadium, brushed chrome-plated finish

		mm
05003637001	1/2"	125,0

8789 C Zyklop sliding T-handle, 1/2"



Application: 1/2" square drive sockets with ball lock

Design: Sliding drive, chrome vanadium, brushed chrome-plated finish

		mm
05003636001	1/2"	250,0

8795 C Zyklop universal joint, 1/2"



Application: 1/2" square drive sockets with ball lock
Design: Chrome vanadium/chrome molybdenum, brushed chrome-plated finish

			mm
05003640001	1/2"	69,0	


8784 C2 Zyklop Bit adaptor, 1/2", 5/16"



Application: Suitable for 5/16" hex bits as per DIN ISO 1173-C 8 and Wera series 2
Design: Quick-release chuck for fast bit changes, chromium vanadium

			mm
05003641001	5/16"	1/2"	50,0

8794 C Zyklop wobble extension, 1/2"



Application: 1/2" square drive sockets with ball lock
Design: Swivels through 15°, chrome vanadium, brushed chrome-plated finish

			mm
05003639001	1/2"	52,0	

The Koloss

Obviously, many users also apply their ratchet as a hammer. This often ruins the ratchet and is dangerous to boot.

That is why we developed the heavy-duty Koloss ratchet whose mechanism is extremely robust, and nearly impossible to destroy through impact.

The Koloss is so robust that it can even be used safely with its extension element.




Non-removable sealed and hardened square drive for tough jobs.



Changing the ratchet direction using a hardened push-through square drive ensures great resilience, since there is no susceptible switching mechanism that could be damaged by hammer blows. This is far more robust than a forward/reverse switch.



Tubular shaft minimises impact vibrations.

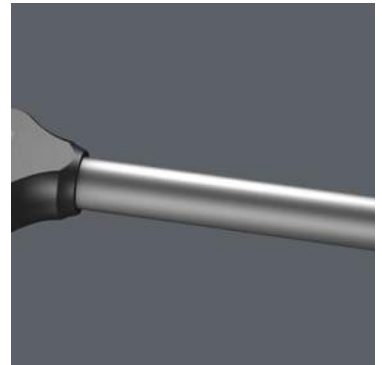

Dry-fined hammer face: used with rubber pad attachments to protect materials and surfaces.



The drop-forged hammer head is permanently pinned to the shaft in a form-fit joint. This guarantees an almost non-detachable positioning of the hammer head on the handle.



Dual ratchet teeth: gives the robust 30 saw teeth the precision engineering effect of 60 fine teeth with a 6° return angle.



Newly developed, multi-component Kraftform handle that satisfies both the hammer and ratchet application requirements.



Sockets and accessories can simply and quickly be attached.




The degree of torque applied can be increased by using the Wera extension Koloss 8002 C.

Koloss

This ratchet is a real hit! And that is for sure!

8002 C Koloss All Inclusive Set with 1/2" drive



Application: Ratchet function for 1/2" square sockets and 1/2" adaptors with square drive, equipped with ball lock, hammer function e.g. to align work pieces

Design: Push-through square drive for forward and reverse operation, fine-tooth ratchet mechanism, small return angle of 6°, can transfer at least 600 Nm of torque, tubular shaft to minimise impact vibrations, drop-forged hammer head, positively pinned, ground striking face

Handle: Multi-component Kraftform handle for optimum pressure, impact and tensile loads, handle end designed for connection of Koloss extension 8780 C and Koloss centering pin 8781 C

05133862001	
8002 C	1 x 1/2"x341,0
8782 C	1 x 2x50,0
8780 C	1 x 341,0x137
8000 E	1 x Extension release pin
8000 HLF	1 x Holster

8002 C Koloss 1/2" with 1/2" drive



Application: Ratchet function for 1/2" square sockets and 1/2" adaptors with square drive, equipped with ball lock, hammer function e.g. to align work pieces

Design: Push-through square drive for forward and reverse operation, fine-tooth ratchet mechanism, small return angle of 6°, can transfer at least 600 Nm of torque, tubular shaft to minimise impact vibrations, drop-forged hammer head, positively pinned, ground striking face

Handle: Multi-component Kraftform handle for optimum pressure, impact and tensile loads, handle end designed for connection of Koloss extension 8780 C and Koloss centering pin 8781 C

05003692001	
8002 C	1 x 1/2"x341,0
8782 C	1 x 2x50,0
8000 HLF	1 x Holster

8780 C Koloss extension



Application: Extension for use with Wera Koloss 8002 C to increase torque transfer

Design: Tough, tempered Cr-Mo steel

Handle: Multi-component Kraftform handle for optimum pressure, impact and tensile loads, laser-engraved safety instructions for permanent recognition

	⌀	⌀
	mm	mm
05003695001	341,0	137



” To learn more about this product, scan the QR code. “

8781 C Koloss centring pin



Application: Centering pin for use with Wera Koloss 8002 C to align lugs or drill holes

Design: Tapered pin out of tough, tempered Cr-Mo steel

		
	mm	mm
05003696001	85	135,0

8782 C Koloss pad set



Application: Protective attachment for striking faces for use with Wera Koloss 8002 C to protect materials and surfaces

Design: Flexible, thermoplastic elastomer material for lasting elasticity and maximum protection

	
	# mm
05003697001	2 50,0

Tip

Dry-fined hammer face



Dry-fined hammer face: used with rubber pad attachments to protect materials and surfaces.

Why do the dual ratchet teeth provide particular robustness?



Dual ratchet teeth: gives the robust 30 saw teeth the precision engineering effect of 60 fine teeth with a 6° return angle.

Who is the Koloss suitable for?



Basically anyone who would like to work with a ½" ratchet. Typical fields of application are mechanical engineering, boatbuilding, mining, aircraft construction, bridge building, commercial vehicle construction and maintenance, railway and road construction and maintenance, industrial plant and equipment construction, high-bay

warehouse construction, petroleum industry and many more.

Zyklop Mini

Combines elegant design with incredible resilience. Suitable for rapid fastening even in confined working situations. The Wera Zyklop Mini is applied whenever fastening with a power tool or conventional tools is impossible due to insufficient space.

The Zyklop Mini 1 for the direct attachment of bits; the Zyklop Mini 2 for the direct attachment of the special Wera Zyklop sockets.



The fine tooth mechanism, with its 60 teeth, allows a small return angle of only 6° – ideal for precision work.



Thumbwheel enables rapid screw-driving, even when there isn't sufficient room for ratcheting use.



Simple switching between left/right operations.



Its slim design makes it ideal for all particularly confined working situations.

Zyklop Mini

For confined spaces

Bit-Check 30 Zyklop Mini 1



28 bits, 1 Rapidaptor bit holder, 1 adaptor 870/1 (1/4" hexagon to 1/4" square), 1 Wera Bit Ratchet, drop-forged full steel design, suitable for 1/4" hex bits as per DIN ISO 1173-C 6.3 and E 6.3 and Wera series 1 and 4

05073640001		
	8001 A	1 x 1/4"x87,0
⊗	870/1	1 x 1/4"x25
⊗	889/4/1 K	1 x 1/4"x50
+	851/1 TZ PH	2 x PH 1x25; 3 x PH 2x25; 1 x PH 3x25
+	855/1 TH PZ	1 x PZ 1x25; 3 x PZ 2x25; 1 x PZ 3x25
+	867/1 TZ TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25
+	867/1 Z TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25
+	800/1 TZ	1 x 1,0x5,5x25
+	840/1 Z Hex-Plus	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25; 1 x 8,0x25

Bit-Check 30 Zyklop Mini 2



28 bits, 1 Rapidaptor bit holder, 1 adaptor 870/1 (1/4" hexagon to 1/4" square), 1 Wera Bit Ratchet, drop-forged full steel design, suitable for 1/4" hex bits as per DIN ISO 1173-C 6.3 and E 6.3 and Wera series 1 and 4

05346293001		
	8001 A	1 x 1/4"x87,0
⊗	870/1	1 x 1/4"x25
⊗	889/4/1 K	1 x 1/4"x50
+	851/1 TZ PH	2 x PH 1x25; 3 x PH 2x25; 1 x PH 3x25
+	867/1 TZ TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25
+	867/1 Z TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25
+	800/1 TZ	1 x 1,0x5,5x25
+	840/1 Z Hex-Plus	1 x 3/32"x25; 1 x 1/8"x25; 1 x 5/32"x25; 1 x 3/16"x25; 1 x 1/4"x25
+	868/1 Z	1 x # 1x25; 3 x # 2x25; 1 x # 3x25

Kraftform Kompakt Zyklop Mini 2



1 Wera Bit Ratchet Zyklop Mini 1, drop-forged full steel design, suitable for 1/4" hex bits as per DIN ISO 1173-C 6.3 and E 6.3 and Wera series 1 and 4. Can also be used with 1/4" sockets by using the Wera socket adaptor 870/1. 1 Wera Ratchet Zyklop Mini 2, drop-forged full steel design, suitable for for Wera sockets 8790 FA. 9 Wera sockets 8790 FA, 1 socket adaptor 870/1, 14 bits, tough, for universal use

05135918001		
	8001 A	1 x 1/4"x87,0
	8005	1 x 107
●	813	1 x 1/4"x78
⊗	870/1	1 x 1/4"x25
⊕	851/1 Z PH	1 x PH 1x25; 1 x PH 2x25
⊕	855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25
⊗	867/1 TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25
○	840/1 Z Hex-Plus	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25
	8790 FA	1 x 4,0; 1 x 5,0; 1 x 5,5; 1 x 6,0; 1 x 7,0; 1 x 8,0; 1 x 10,0; 1 x 12,0; 1 x 13,0

Tip

Zyklop Mini tool sets



Available in a set with the dependable Wera Bit-Check with socket adaptor and belt clip. Simple fitting and removal of tools. Very robust and a long service life.

Bit-Check as a lever



The Bit-Check itself can be used as a lever.

Zyklop Mini 2



The Zyklop Mini 2 is suitable for the direct attachment of the special Wera Zyklop sockets 8790 FA. These sockets feature a very low height, ideal for confined working spaces.

Zyklop Mini

For confined spaces

Tool-Check PLUS



28 bits, 1 hand holder 813 suitable for the attachment of bits with $\frac{1}{4}$ " hexagon drive as per DIN ISO 1173-C 6.3 and Wera connection series 1, 1 Rapidaptor bit holder, 1 adaptor 870/1 ($\frac{1}{4}$ " hexagon to $\frac{1}{4}$ " square), 7 sockets ($\frac{1}{4}$ "); 1 Wera Bit Ratchet, drop-forged full steel design suitable for the attachment of bits with $\frac{1}{4}$ " hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 and Wera connection series 1 and 4; the use of $\frac{1}{4}$ " sockets is also possible with the application of the Wera adaptor 870/1

05056490001		
8001 A	1 x $\frac{1}{4}$ "x87,0	
813	1 x $\frac{1}{4}$ "x78	
889/4/1 K	1 x $\frac{1}{4}$ "x50	
870/1	1 x $\frac{1}{4}$ "x25	
8790 HMA	1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0	
851/1 TZ PH	2 x PH 1x25; 3 x PH 2x25; 1 x PH 3x25	
855/1 TH PZ	1 x PZ 1x25; 3 x PZ 2x25; 1 x PZ 3x25	
867/1 TZ	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25	
867/1 Z TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25	
840/1 Z Hex-Plus	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25; 1 x 8,0x25	
800/1 TZ	1 x 1,0x5,5x25	

Tool-Check PLUS Imperial



28 bits, 1 hand holder 813 suitable for the attachment of bits with $\frac{1}{4}$ " hexagon drive as per DIN ISO 1173-C 6.3 and Wera connection series 1, 1 Rapidaptor bit holder, 1 adaptor 870/1 ($\frac{1}{4}$ " hexagon to $\frac{1}{4}$ " square), 7 sockets ($\frac{1}{4}$ "); 1 Wera Bit Ratchet, drop-forged full steel design suitable for the attachment of bits with $\frac{1}{4}$ " hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 and Wera connection series 1 and 4; the use of $\frac{1}{4}$ " sockets is also possible with the application of the Wera adaptor 870/1

05056491001		
8001 A	1 x $\frac{1}{4}$ "x87,0	
813	1 x $\frac{1}{4}$ "x78	
889/4/1 K	1 x $\frac{1}{4}$ "x50	
870/1	1 x $\frac{1}{4}$ "x25	
8790 HMA	1 x $\frac{3}{16}$ "x23,0; 1 x $\frac{1}{4}$ "x23,0; 1 x $\frac{5}{16}$ "x23,0; 1 x $\frac{11}{32}$ "x23,0; 1 x $\frac{3}{8}$ "x23,0; 1 x $\frac{7}{16}$ "x23,0; 1 x $\frac{1}{2}$ "x23,0	
851/1 TZ PH	2 x PH 1x25; 3 x PH 2x25; 1 x PH 3x25	
800/1 TZ	1 x 1,0x5,5x25	
867/1 TZ	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25	
867/1 Z TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25	
840/1 Z Hex-Plus	1 x $\frac{3}{32}$ "x25; 1 x $\frac{1}{8}$ "x25; 1 x $\frac{5}{32}$ "x25; 1 x $\frac{3}{16}$ "x25; 1 x $\frac{5}{16}$ "x25	
868/1 V	1 x # 1x25; 1 x # 2x25; 1 x # 3x25	



”To learn more about this product, scan the QR code. “

Tool-Check 1 SB




28 bits; 1 socket adaptor 870/1 (1/4" hexagonal to 1/4" square); 7 manual & power tool sockets; 1 Rapidaptor bit holder; 1 Wera Bit Ratchet, with drop-forged steel design suitable for the fitting of bits with 1/4" hexagonal headed drive as per DIN ISO 1173-C 6.3 and E 6.3, i.e. Wera Series 1 and 4. Can also be used with 1/4" sockets by using the socket adaptor (870/1).

05073220001	
8001 A	1 x 1/4"x87,0
870/1	1 x 1/4"x25
889/4/1 K	1 x 1/4"x50
851/1 TZ PH	2 x PH 1x25; 3 x PH 2x25; 1 x PH 3x25
855/1 TH PZ	1 x PZ 1x25; 3 x PZ 2x25; 1 x PZ 3x25
867/1 TZ	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25;
TORX®	1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25
867/1 Z TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25;
B0	1 x TX 25x25; 1 x TX 30x25
800/1 TZ	1 x 1,0x5,5x25
840/1 Z	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25;
Hex-Plus	1 x 8,0x25
8790 HMA	1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0;
	1 x 8,0x23,0; 1 x 10,0x23,0; 1 x 12,0x23,0;
	1 x 13,0x23,0

Tip

What parts can be connected to the Zyklop Mini 1?



Bits and sockets. Bits can be connected directly. However, a holder can be connected first and then the bit can be attached to this. This then serves as an extension with a free-turning sleeve. An adaptor e.g. Wera 870/1 is needed for sockets – 1/4" hexagonal on a square drive (included in the Bit-Check and with the individual Zyklop Mini 1 in the set).

When is the Zyklop Mini 1 needed?



Particularly when the space is confined and there is not much room for the tool.

Is rapid screwdriving possible with the Zyklop Mini?



High working speeds can be attained with the Zyklop Mini. The thumb wheel is important, enabling more rapid screwdriving, and the Zyklop Mini handle only needs to be used for the final tightening of the screw.



"Take it easy"



"Take it easy" tool finder system – with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).

Zyklop Mini

For confined spaces

Tool-Check Automotive 1




28 bits; 1 870/1 socket adaptor (1/4" hexagonal to 1/4" square); 7 manual & power tool sockets; 1 Rapidaptor bit holder; 1 Wera Bit Ratchet, with drop-forged steel design suitable for the fitting of bits with 1/4" hexagonal headed drive as per DIN ISO 1173-C 6.3 and E 6.3, i.e. Wera Series 1 and 4. Can also be used with 1/4" sockets by using the socket adaptor (870/1).

05200995001	
8001 A	1 x 1/4"x87,0
870/1	1 x 1/4"x25
889/4/1 K	1 x 1/4"x50
851/1 TZ PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
867/1 TZ TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25
867/1 Z TORX® B0	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25
800/1 TZ	1 x 1,0x5,5x25
840/1 Z Hex-Plus	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25; 1 x 8,0x25
860/1 XZN Vielzahn	1 x M 4x25; 1 x M 5x25; 1 x M 6x25; 1 x M 8x25
873/1 Five Lobe	1 x 20x25; 1 x 25x25; 1 x 27x25; 1 x 30x25
8790 HMA	1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0



” To learn more about this product, scan the QR code. “

Kraftform Kompakt Zyklop Mini 1



9 bits, tough, for universal use, 1 Wera Bit Ratchet Zyklop Mini 1, drop-forged full steel design, suitable for 1/4" hex bits as per DIN ISO 1173-C 6.3 and E 6.3 and Wera series 1 and 4. Can also be used with 1/4" sockets by using the Wera socket adaptor 870/1.

05073645001	
8001 A	1 x 1/4"x87,0
851/1 Z PH	1 x PH 1x25; 1 x PH 2x25
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25
867/1 TORX®	1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25
840/1 Z Hex-Plus	1 x 4,0x25; 1 x 5,0x25

8001 A Zyklop Mini 1 Bit Ratchet 1/4" SB with 1/4" drive



Application: Suitable for 1/4" hex bits as per DIN ISO 1173-C 6.3 and E 6.3 and Wera series 1 and 4, Wera adaptor 870/1 for 1/4" sockets

Design: Drop-forged full steel design, fine-tooth ratchet mechanism, small return angle of 6°, forward and reverse drive switch

Handle: Kraftform handle with proven Kraftform geometry provides perfectly designed finger contact zones, ergonomic ratchet head and handle

05073230001	
8001 A	1 x 1/4"x87,0
870/1	1 x 1/4"x25

Zyklop Mini 2



Application: Suitable for Wera sockets 8790 FA

Design: Drop-forged full steel design, fine-tooth ratchet mechanism, small return angle of 6°, forward and reverse drive switch

Handle: Kraftform handle with proven Kraftform geometry provides perfectly designed finger contact zones, ergonomic ratchet head and handle

05003660001	107

8790 FA Zyklop socket with 1/4" and Hexagon 11 drive



Application: Hexagon headed bolts, screws and nuts

Design: 1/4" external square and hexagon size; suitable for 1/4" ratchets and Wera Zyklop Mini 2 ratchet

Handle: Manual applications; ball intercept ring; extremely low height, ideal for confined spaces; chrome vanadium, chrome-plated

	mm	mm	mm	mm	mm
05003665001	4,0	11,8	9,5	18,0	6,4
05003666001	4,5	11,8	9,5	18,0	7,0
05003667001	5,0	11,8	9,5	18,0	7,6
05003668001	5,5	11,8	9,5	18,0	8,2
05003669001	6,0	11,8	9,5	18,0	9,2
05003670001	7,0	11,8	9,5	18,0	10,4
05003675001	8,0	11,8	9,5	18,0	11,5
05003690001	10,0	11,8	9,5	18,0	13,8
05003684001	12,0	11,8	9,5	18,0	16,8
05003685001	13,0	11,8	9,5	18,0	17,8

Tip

Is such a small tool sufficiently resilient?



The Zyklop Mini 1 can withstand at least 65 Nm. That is far more power than can normally be transferred to such a small tool.

Zyklop Mini 2



The Zyklop Mini 2 is suitable for the direct attachment of the special Wera Zyklop sockets 8790 FA. These sockets feature a very low height, ideal for confined working spaces.



“Take it easy”



“Take it easy” tool finder system – with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).



Joker Wrenches



Joker
Ratcheting combination wrenches

192



Joker Switch
Ratcheting combination wrenches

194



Joker open-ended wrench

When we began to think about open-ended wrenches, we asked ourselves: why does the wrench always have to be flipped over; why does it have an offset design; why does it slip off injuring fingers? The new design of the mouth resulted in a real “Joker” that works even when all other trumps have been played.



The Joker's holding function means that nuts and bolts can be held in the jaw and easily positioned where they are needed. Fastening on to the thread can then be done quickly and safely, thanks to the innovative special stop-plate which holds the fastener. No more time-wasting searches for dropped nuts and bolts! After applying and positioning the nut or bolt, fastening can begin immediately – no additional tools required.



Constant re-positioning of the wrench? Difficulty holding fasteners in confined spaces? Easing off to avoid any risks of injury or fastener damage? That was yesterday. Today, the Joker prevents slipping off of the fastener head with its integrated limit-stop – no longer is the thumb needed to act as a depth stop. This makes applications much easier and allows significantly more force to be applied during fastening jobs.



The Joker's clever double-hex geometry delivers a very positive connection with nuts or bolts – it's a perfect fit. And the exchangeable, hardened metal gripping plate in the Joker's mouth literally bites itself into the bolt, with its extremely hard tips. Both features combine to prevent slipping, even at higher torque.



Instead of 60°, the Joker only has a 30° return angle thanks to its unique double-hex design. Along with the Joker's straight neck, this means that flipping the wrench has become a thing of the past. With the Joker, you can now loosen and tighten nuts and bolts, in situations where conventional tools fail. Particularly in confined spaces, where conventional open-jawed wrenches cannot be used. The combination of limit stop and small return angle enables effective work, even on screw pipe connections.



The ratcheting feature at the ring end boasts an exceptional, fine tooth mechanism – 80 teeth in all – which provides greater flexibility, even in very confined workspaces.

Joker

Combination ratchet wrenches

Joker Ratcheting combination wrenches



Application: Hexagonal nuts or bolts

Design: Ratcheting combination wrench

							
		mm	mm	mm	mm	mm	mm
05073268001		8	144	20	5,5	18	7
05073270001		10	159	22	5,5	21	7,2
05073271001		11	165	25	6,3	22	7,5
05073272001		12	170,7	26,3	6,6	25	8,5
05073273001		13	177	27,3	7	25	8,6
05073274001		14	188	29,3	7,5	28	9,2
05073275001		15	200	32,3	7,8	28,5	9,2
05073276001		16	212	35	8,2	32,7	10,5
05073277001		17	224	37,2	8,5	32,7	10,5
05073278001		18	235	39	9	33,8	11
05073279001		19	246	42	9,5	34,8	11

Joker Ratcheting combination wrenches, Imperial




Application: Hexagonal nuts or bolts

Design: Ratcheting combination wrench

							
			mm	mm	mm	mm	mm
05073280001		5/16"	144	20	5,5	18	7
05073281001		3/8"	159	22	5,5	21	7,2
05073282001		7/16"	165	25	6,3	22	7,5
05073283001		1/2"	177	27,3	7	25	8,6
05073284001		9/16"	188	29,3	7,5	28	9,2
05073285001		5/8"	212	35	8,2	32,7	10,5
05073286001		11/16"	235	39	9	33,8	11
05073287001		3/4"	246	42	9,5	34,8	11

Joker Double Open-Ended Wrench



Application: Hexagon bolts and nuts

Design: Double open-ended wrench

							
		mm	mm	mm	mm	mm	mm
05003760001		10	23	13	27	5,5	7
05003765001		17	37	19	42	8,5	9,5

Joker Set of ratcheting combination wrenches



Set of ratcheting combination wrenches

11-piece set

Durable pouch

05020013001		
	Joker	1 x 8x144; 1 x 10x159; 1 x 11x165; 1 x 12x170,7; 1 x 13x177; 1 x 14x188; 1 x 15x200; 1 x 16x212; 1 x 17x224; 1 x 18x235; 1 x 19x246

Joker Set of ratcheting combination wrenches, imperial



Set of ratcheting combination wrenches
8-piece set
Durable pouch

05020012001	
Joker inch	1 x 5/16"x144; 1 x 3/8"x159; 1 x 7/16"x165; 1 x 1/2"x177; 1 x 9/16"x188; 1 x 5/8"x212; 1 x 11/16"x235; 1 x 3/4"x246

Joker Set of ratcheting combination / double open-ended wrenches



Ratcheting Combination/Double Open-Ended Wrench Set
6-piece set
Durable pouch

05020022001	
Joker	1 x 10x159; 1 x 13x177; 1 x 17x224; 1 x 19x246
Joker Double	1 x 10x13x167; 1 x 17x19x235

Tip

Fine tooth mechanism



The ratcheting feature at the ring end boasts an exceptional, fine tooth mechanism – 80 teeth in all – which provides greater flexibility, even in very confined working spaces.



Double open-ended wrench



The Joker double open-ended wrench is ideally suited for locking down nuts and bolts.



"Take it easy"



"Take it easy" tool finder system – with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).

Joker

Combination ratchet wrenches

Joker Set of ratcheting combination wrenches



Set of ratcheting combination wrenches
4-piece set
Durable pouch

05073290001		
	Joker	1 x 10x159; 1 x 13x177; 1 x 17x224; 1 x 19x246

Joker Set of ratcheting combination wrenches, Imperial



Set of ratcheting combination wrenches
4-piece set
Durable pouch

05073295001		
	Joker inch	1 x 7/16"x165; 1 x 1/2"x177; 1 x 9/16"x188; 1 x 3/4"x246



” To learn more about this product, scan the QR code. “

Joker Switch Ratcheting combination wrenches, with switch lever



Application: Hexagonal nuts or bolts

Design: Ratcheting combination wrench, switch lever for convenient change of direction; ring end angled at 15° from the handle

		mm	mm	mm	mm	mm	mm
05020064001		8	144	20,3	5,5	18	7
05020065001		10	159	23	5,5	21,5	7,5
05020066001		11	165	24,3	6,3	22	7,5
05020067001		12	171	26,3	6,6	25	8,5
05020068001		13	179	27,3	7	26	8,5
05020069001		14	187	30	7,5	28	9,5
05020070001		15	199	32	7,8	28,8	9,5
05020071001		16	213	35	8,2	31,7	10,5
05020072001		17	225	37	8,5	33	10,5
05020073001		18	234	39,5	9	34	11
05020074001		19	246	42	9,5	34,7	11

Available as of autumn 2016

Joker Switch Ratcheting combination wrenches, Imperial, reversible




Application: Hexagonal nuts or bolts

Design: Ratcheting combination wrench, switch lever for convenient change of direction; ring end angled at 15° from the handle

		mm	mm	mm	mm	mm	mm
05020075001		5/16"	144	20,3	5,5	18	7
05020076001		3/8"	159	23	5,5	21,5	7,5
05020077001		7/16"	165	24,3	6,3	22	7,5
05020078001		1/2"	171	26,3	6,6	25	8,5
05020079001		9/16"	187	30	7,5	28	9,5
05020080001		5/8"	213	35	8,2	31,7	10,5
05020081001		11/16"	234	39,5	9	34	11
05020082001		3/4"	246	42	9,5	34,7	11

Available as of autumn 2016

Joker Switch Set of ratcheting combination wrenches



Set of ratcheting combination wrenches, reversible


4-piece set

Durable pouch

05020090001	
	Joker Switch 1 x 10x159; 1 x 13x179; 1 x 17x225; 1 x 19x246

Available as of autumn 2016

Joker Switch Set of ratcheting combination wrenches, Imperial



Set of ratcheting combination wrenches, reversible

4-piece set

Durable pouch

05020092001	
	Joker Switch 1 x 7/16"x165; 1 x 1/2"x171; 1 x 9/16"x187; inch 1 x 3/4"x246

Available as of autumn 2016


Tip

Fine tooth mechanism



The ratcheting feature at the ring end boasts an exceptional, fine tooth mechanism – 80 teeth in all – which provides greater flexibility, even in very confined working spaces.

Angled ratchet end



The ratchet end is angled at 15° to the tool axis, making application of the tool in confined spaces much easier.

Joker Switch



The direction of the fine-tooth ratchet mechanism can easily be changed via the smooth switch lever.

Joker

Combination ratchet wrenches

Joker Set of ratcheting combination wrenches, Imperial



Set of ratcheting combination wrenches, reversible
8-piece set
Durable pouch

05020093001	
Joker Switch inch	1 x 5/16"x144; 1 x 3/8"x159; 1 x 7/16"x165; 1 x 1/2"x171; 1 x 9/16"x187; 1 x 5/8"x213; 1 x 11/16"x234; 1 x 3/4"x246

Available as of autumn 2016

Joker Switch Set of ratcheting combination wrenches




Set of ratcheting combination wrenches, reversible
11-piece set
Durable pouch

05020091001	
Joker Switch	1 x 8x144; 1 x 10x159; 1 x 11x165; 1 x 12x171; 1 x 13x179; 1 x 14x187; 1 x 15x199; 1 x 16x213; 1 x 17x225; 1 x 18x234; 1 x 19x246

Available as of autumn 2016

Pouch for 4 Joker Ratcheting combination wrenches



		
	mm	mm
05671383001	290,0	100,0

Pouch for 8 Joker Ratcheting combination wrenches



		
	mm	mm
05671381001	290,0	110,0

Pouch for 11 Joker Ratcheting combination wrenches



		
	mm	mm
05671382001	290,0	135,0





L-keys



L-keys for Hexagon Socket Screws

202



L-keys
for TORX® and TORX PLUS® Screws

212



Offset Screwdrivers

216



L-keys

We questioned the classic L-key design, since all too often the screw head recess is rounded out, meaning screws can no longer be tightened or loosened – and so the user finds the L-key slipping out of the recess.

Wera Hex-Plus tools have a larger contact surface in the screw head. The notching effects are reduced and thereby the deformation of the screws. At the same time, as much as 20 % more torque can be applied.




Stainless L-Keys are hardened to the same strength as conventional (carbon) steel tools, and prevent extraenous rust forming.



SPKL – protects fingers! L-keys with a thermoplastic sleeve (SPKL) are manufactured out of easy-to-grip, circular material. The sleeve ensures that work is safe and comfortable even at low temperatures. High corrosion protection features thanks to the special BlackLaser surface treatment. Colour coding and large stamp to enable the desired L-key to be easily located.



Chrome-plated hexagon L-keys or with BlackLaser surface treatment for outstanding surface protection and long service life. High corrosion protection.

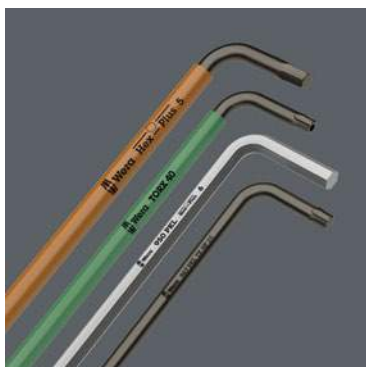

The size of each L-keys has been engraved by a laser. In addition SPKL L-keys have a colour coding according to sizes – for simple and rapid accessing of the required tool. Making it easy to find the right tool.



The wear-resistant clip material ensures that the L-keys are securely held yet are easy to remove.

L-Keys for Hexagon Socket Screws

The Hex-Plus profile extends the service life of hexagon socket screws

3950 PKL/9 L-key set, metric, stainless



9-piece set in a two-component clip

Application: Hexagon socket screws

Design: Stainless steel

Tip: Hex-Plus, ball-end hexagon on long arm

05022720001	
○	3950 PKL 1 x 1,5x90; 1 x 2,0x101; 1 x 2,5x112; 1 x 3,0x123; 1 x 4,0x137; 1 x 5,0x154; 1 x 6,0x172; 1 x 8,0x195; 1 x 10,0x224

3950 PKL/9 SB L-key set, metric, stainless

		4013288
05073544001		111364
○	3950 PKL	1 x 1.5x90; 1 x 2.0x101; 1 x 2.5x112; 1 x 3.0x123; 1 x 4.0x137; 1 x 5.0x154; 1 x 6.0x172; 1 x 8.0x195; 1 x 10.0x224



3950 PKL/9 SZ L-key set, imperial, stainless



9-piece set in belt pouch

Application: Hexagon socket screws

Design: Stainless steel

Tip: Hex-Plus, ball-end hexagon on long arm

05022721001	
○	3950 PKL inch 1 x 3/32"x112; 1 x 7/64"x119; 1 x 1/8"x123; 1 x 9/64"x130; 1 x 5/32"x137; 1 x 3/16"x154; 1 x 1/4"x185; 1 x 5/16"x195; 1 x 3/8"x224

950 SPKL/9 SM N Multicolour L-key set, metric, BlackLaser



9-piece set in a two-component clip

Application: Hexagon socket screws

Design: BlackLaser surface, durable plastic sleeve. The contrasting inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find the right tool.

Tip: Hex-Plus, ball-end hexagon on long arm

05022089001	
○	950 SPKL Multicolour 1 x 1,5x90; 1 x 2,0x101; 1 x 2,5x112; 1 x 3,0x123; 1 x 4,0x137; 1 x 5,0x154; 1 x 6,0x172; 1 x 8,0x195; 1 x 10,0x224

950 SPKL/9 SM N SB Multicolour L-key set, metric, BlackLaser

		4013288
05073593001		165688
○	950 SPKL Multicolour	1 x 1.5x90; 1 x 2.0x101; 1 x 2.5x112; 1 x 3.0x123; 1 x 4.0x137; 1 x 5.0x154; 1 x 6.0x172; 1 x 8.0x195; 1 x 10.0x224



950 SPKL/9 SZ Multicolour L-key set, imperial, BlackLaser



9-piece set in belt pouch

Application: Hexagon socket screws

Design: BlackLaser surface, durable plastic sleeve. The contrasting inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find the right tool.

Tip: Hex-Plus, ball-end hexagon on long arm

05022639001	
○	950 SPKL inch 1 x 5/64"x101; 1 x 3/32"x112; 1 x 1/8"x123; 1 x 5/32"x137; 1 x 3/16"x154; 1 x 7/32"x172; 1 x 1/4"x185; 1 x 5/16"x195; 1 x 3/8"x224

950 SPKL/7B SM Multicolour Magnetic L-key set, metric, BlackLaser



7-piece set in a two-component clip. For recessed screws, it's often advantageous for the screw to be held on the L-key by magnetic force. The Wera clips with magnetiser/demagnetiser enable a magnetisation/demagnetisation of L-keys in a flash.

Application: Hexagon socket screws

Design: BlackLaser surface, durable plastic sleeve. The contrasting inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find the right tool.

Tip: Hex-Plus, ball-end hexagon on long arm

05022534001	
○	950 SPKL 1 x 1,5x90; 1 x 2,0x101; 1 x 2,5x112; 1 x 3,0x123; 1 x 4,0x137; 1 x 5,0x154; 1 x 6,0x172

Tip



"Take it easy"



"Take it easy" tool finder system – with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).

Why do the SPKL L-keys from Wera have a round design and come with a rubber sleeve?



L-keys made from circular material fit into the hand better and allow less strenuous work over a longer period. Additionally, the rubber sleeve provides a pleasant grip, particularly in applications at low temperatures. Colour coding and large stamp enable the desired L-key to be easily located. Moreover, the round material keys are more robust, particularly where smaller sizes are concerned.



Magnetiser/Demagnetiser



Magnetising



Demagnetising

For recessed screws, it's often advantageous for the screw to be held on the L-key by magnetic force. The Wera clips with magnetiser/demagnetiser enable a magnetisation/demagnetisation of L-keys in a flash.

L-Keys for Hexagon Socket Screws

The Hex-Plus profile extends the service life of hexagon socket screws

950 PKL/9 SM N L-key set, metric, chrome-plated



9-piece set in a two-component clip

Application: Hexagon socket screws

Design: Chrome-plated

Tip: Hex-Plus, ball-end hexagon on long arm

05022087001	
○	950 PKL 1 x 1,5x90 ¹⁾ ; 1 x 2,0x100; 1 x 2,5x112; 1 x 3,0x126; 1 x 4,0x140; 1 x 5,0x160; 1 x 6,0x180; 1 x 8,0x200; 1 x 10,0x219

¹⁾ Regular hexagon

950 PKL/9 BM N L-key set, metric, BlackLaser



9-piece set in a two-component clip

Application: Hexagon socket screws

Design: BlackLaser surface

Tip: Hex-Plus, ball-end hexagon on long arm

05022086001	
○	950 PKL BM 1 x 1,5x90 ¹⁾ ; 1 x 2,0x100; 1 x 2,5x112; 1 x 3,0x126; 1 x 4,0x140; 1 x 5,0x160; 1 x 6,0x180; 1 x 8,0x200; 1 x 10,0x219

¹⁾ Regular hexagon

950 PKL/9 SM N SB L-key set, metric, chrome-plated

05073391001	
○	950 PKL 1 x 1.5x90 ¹⁾ ; 1 x 2.0x100; 1 x 2.5x112; 1 x 3.0x126; 1 x 4.0x140; 1 x 5.0x160; 1 x 6.0x180; 1 x 8.0x200; 1 x 10.0x219

¹⁾ Regular hexagon



950 PKL/9 BM N SB L-key set, metric, BlackLaser

05073596001	
○	950 PKL BM 1 x 1.5x90 ¹⁾ ; 1 x 2.0x100; 1 x 2.5x112; 1 x 3.0x126; 1 x 4.0x140; 1 x 5.0x160; 1 x 6.0x180; 1 x 8.0x200; 1 x 10.0x219

¹⁾ Regular hexagon



950 PKL/9 SZ N L-key set, imperial, BlackLaser



9-piece set in a two-component clip

Application: Hexagon socket screws

Design: BlackLaser surface

Tip: Hex-Plus, ball-end hexagon on long arm

05022171001	
○	950 PKL inch 1 x 5/64"x100; 1 x 3/32"x112; 1 x 1/8"x126; 1 x 5/32"x140; 1 x 3/16"x160; 1 x 7/32"x180; 1 x 1/4"x190; 1 x 5/16"x200; 1 x 3/8"x212

950 PKL/9 SZ N SB L-key set, imperial, BlackLaser

		4013288
05133180001		154118
○	950 PKL inch 1 x 5/64"x100; 1 x 3/32"x112; 1 x 1/8"x126; 1 x 5/32"x140; 1 x 3/16"x160; 1 x 7/32"x180; 1 x 1/4"x190; 1 x 5/16"x200; 1 x 3/8"x212	




Tip

Hex-Plus for hexagon socket screws



Hexagon screws can endure a problem because the contact surfaces delivering the power from the conventional tool, is transferred to the screw via very small surface areas. The consequence: the screw can become damaged (rounding out). Hex-Plus tools have a greater contact surface that prevents this from happening! Good to know: Hex-Plus tools fit into every standard hexagon socket screw!

Ball tip



The spherical drive profile means that it is possible to swivel the axis of the tool to that of the screw, and therefore enable angled, "around-the-corner" screwdriving jobs.



L-Keys for Hexagon Socket Screws

The Hex-Plus profile extends the service life of hexagon socket screws

950 PKL/13 SZ N L-key set, imperial, BlackLaser



13-piece set in a two-component clip

Application: Hexagon socket screws

Design: BlackLaser surface

Tip: Hex-Plus, ball-end hexagon on long arm

05021728001	
○	950 PKL inch 1 x 0,05"x83 ¹⁾ ; 1 x 1/16"x91 ¹⁾ ; 1 x 5/64"x100; 1 x 3/32"x112; 1 x 7/64"x119; 1 x 1/8"x126; 1 x 9/64"x132; 1 x 5/32"x140; 1 x 3/16"x160; 1 x 7/32"x180; 1 x 1/4"x190; 1 x 5/16"x200; 1 x 3/8"x212

¹⁾ Regular hexagon

950 PKL/7 SM N L-key set, metric, chrome-plated



7-piece set in a two-component clip

Application: Hexagon socket screws

Design: Chrome-plated

Tip: Hex-Plus, ball-end hexagon on long arm

05022181001	
○	950 PKL 1 x 1,5x90 ¹⁾ ; 1 x 2,0x100; 1 x 2,5x112; 1 x 3,0x126; 1 x 4,0x140; 1 x 5,0x160; 1 x 6,0x180

¹⁾ Regular hexagon

950 PKL/7B SM Magnetic L-key set, metric, chrome-plated



7-piece set in a two-component clip. For recessed screws, it's often advantageous for the screw to be held on the L-key by magnetic force. The Wera clips with magnetiser/demagnetiser enable a magnetisation/demagnetisation of L-keys in a flash.

Application: Hexagon socket screws

Design: Chrome-plated

Tip: Hex-Plus, ball-end hexagon on long arm

05022101001	
○	950 PKL 1 x 1,5x90 ¹⁾ ; 1 x 2,0x100; 1 x 2,5x112; 1 x 3,0x126; 1 x 4,0x140; 1 x 5,0x160; 1 x 6,0x180

¹⁾ Regular hexagon

950 PKLS/9 SM SB L-key set, metric, chrome-plated



9-piece set in a two-component clip

Application: Hexagon socket screws

Blade: Chrome plated, with extra short arm for use on screws that are difficult to access

Tip: Hex-Plus, ballpoint hexagon on long arm

05073594001	
○	950 PKLS 1 x 1,5x90 ¹⁾ ; 1 x 2,0x100; 1 x 2,5x112; 1 x 3,0x126; 1 x 4,0x140; 1 x 5,0x160; 1 x 6,0x180; 1 x 8,0x200; 1 x 10,0x219

¹⁾ Regular hexagon

950 L/9 SM N L-key set, metric, chrome-plated



Application: Hexagon socket screws
Design: Chrome-plated
Tip: Hex-Plus

05021909001	
○	950 L 1 x 1,5x90 ¹⁾ ; 1 x 2,0x100; 1 x 2,5x112; 1 x 3,0x126; 1 x 4,0x140; 1 x 5,0x160; 1 x 6,0x180; 1 x 8,0x200; 1 x 10,0x219

¹⁾ Regular hexagon

950/9 BM N L-key set, metric, BlackLaser



Application: Hexagon socket screws
Design: BlackLaser surface
Tip: Hex-Plus

05021737001	
○	950 BM 1 x 1,5x45 ¹⁾ ; 1 x 2,0x50; 1 x 2,5x56; 1 x 3,0x63; 1 x 4,0x70; 1 x 5,0x80; 1 x 6,0x90; 1 x 8,0x100; 1 x 10,0x112

¹⁾ Regular hexagon.

Tip



Are there any advantages of an L-key with an extra short arm?




All users will recognise the need to saw or grind down L-keys to make them shorter for particularly confined screwdriving jobs. This has the disadvantage that they no longer have any corrosion protection at the separation point and secondly, they can become "soft" and therefore useless due to an alteration in the hardening during the shortening process.



L-Keys for Hexagon Socket Screws

The Hex-Plus profile extends the service life of hexagon socket screws

950/9 SM N L-key set, metric, chrome-plated



9-piece set in a two-component clip

Application: Hexagon socket screws

Blade: Chrome-plated

Tip: Hex-Plus

05021406001	
	950 1 x 1,5x45 ¹⁾ ; 1 x 2,0x50; 1 x 2,5x56; 1 x 3,0x63; 1 x 4,0x70; 1 x 5,0x80; 1 x 6,0x90; 1 x 8,0x100; 1 x 10,0x112

¹⁾ Regular hexagon.

950 PKS/9 SM N L-key set, metric, chrome-plated



9-piece set in a two-component clip

Application: Hexagon socket screws

Design: Chrome-plated

Tip: Hex-Plus, ball-end hexagon on long arm

05133163001	
	950 PKS 1 x 1,5x50 ¹⁾ ; 1 x 2,0x56; 1 x 2,5x63; 1 x 3,0x71; 1 x 4,0x80; 1 x 5,0x90; 1 x 6,0x100; 1 x 8,0x112; 1 x 10,0x125

¹⁾ Regular hexagon

3950 PKL L-key, metric, stainless



Application: Hexagon socket screws

Design: Stainless steel

Tip: Hex-Plus, ball-end hexagon on long arm

	mm	mm	mm		
05022700001	1,5	90	14	3 1/2"	9/16"
05022701001	2,0	101	16	4"	5/8"
05022702001	2,5	112	19	4 7/16"	3/4"
05022703001	3,0	123	21	4 7/8"	27/32"
05022704001	4,0	137	24	5 3/8"	1"
05022705001	5,0	154	27	6 1/16"	1 1/16"
05022706001	6,0	172	31	6 3/4"	1 1/4"
05022708001	8,0	195	37	7 11/16"	1 7/16"
05022709001	10,0	224	42	9"	1 11/16"

3950 PKL L-key, imperial, stainless



Application: Hexagon socket screws

Design: Stainless steel

Tip: Hex-Plus, ball-end hexagon on long arm

		mm	mm		
05022710001	3/32"	112	19	4 7/16"	3/4"
05022711001	7/64"	119	20	4 3/4"	25/32"
05022712001	1/8"	123	21	4 7/8"	27/32"
05022713001	9/64"	130	22	5 3/16"	29/32"
05022714001	5/32"	137	24	5 3/8"	1"
05022715001	3/16"	154	27	6 1/16"	1 1/16"
05022716001	1/4"	185	34	7 1/4"	1 5/16"
05022717001	5/16"	195	37	7 11/16"	1 7/16"
05022718001	3/8"	224	42	9"	1 11/16"

950 SPKL L-key Multicolour, metric



Application: Hexagon socket screws

Design: BlackLaser surface, durable plastic sleeve. The contrasting inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find the right tool.

Tip: Hex-Plus, ball-end hexagon on long arm

	mm	mm	mm	$\frac{1}{2}$ "	$\frac{1}{16}$ "
05022600001	1,5	90	14	$3 \frac{1}{2}$ "	$\frac{9}{16}$ "
05022602001	2,0	101	16	4"	$\frac{5}{8}$ "
05022604001	2,5	112	19	$4 \frac{7}{16}$ "	$\frac{3}{4}$ "
05022606001	3,0	123	21	$4 \frac{7}{8}$ "	$\frac{27}{32}$ "
05022608001	4,0	137	24	$5 \frac{3}{8}$ "	1"
05022610001	5,0	154	27	$6 \frac{1}{16}$ "	$1 \frac{1}{16}$ "
05022612001	6,0	172	31	$6 \frac{3}{4}$ "	$1 \frac{1}{4}$ "
05022614001	8,0	195	37	$7 \frac{11}{16}$ "	$1 \frac{7}{16}$ "
05022616001	10,0	224	42	9"	$1 \frac{11}{16}$ "

950 SPKL L-key Multicolour, imperial



Application: Hexagon socket screws

Design: BlackLaser surface, durable plastic sleeve. The contrasting inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find the right tool.

Tip: Hex-Plus, ball-end hexagon on long arm

	$\frac{1}{16}$ "	mm	mm	$\frac{1}{2}$ "	$\frac{1}{16}$ "
05022630001	$\frac{5}{64}$ "	101	16	4"	$\frac{5}{8}$ "
05022631001	$\frac{3}{32}$ "	112	19	$4 \frac{7}{16}$ "	$\frac{3}{4}$ "
05022632001	$\frac{1}{8}$ "	123	21	$4 \frac{7}{8}$ "	$\frac{27}{32}$ "
05022633001	$\frac{5}{32}$ "	137	24	$5 \frac{3}{8}$ "	1"
05022634001	$\frac{3}{16}$ "	154	27	$6 \frac{1}{16}$ "	$1 \frac{1}{16}$ "
05022635001	$\frac{7}{32}$ "	172	31	$6 \frac{3}{4}$ "	$1 \frac{1}{4}$ "
05022636001	$\frac{1}{4}$ "	185	34	$7 \frac{1}{4}$ "	$1 \frac{5}{16}$ "
05022637001	$\frac{5}{16}$ "	195	37	$7 \frac{11}{16}$ "	$1 \frac{7}{16}$ "
05022638001	$\frac{3}{8}$ "	224	42	9"	$1 \frac{11}{16}$ "

950 PKL L-key, metric, chrome-plated



Application: Hexagon socket screws

Design: Chrome-plated

Tip: Hex-Plus, ball-end hexagon on long arm

	mm	mm	mm	$\frac{1}{2}$ "	$\frac{1}{16}$ "
05022050001 ¹⁾	1,5	90	14	$3 \frac{1}{2}$ "	$\frac{9}{16}$ "
05022052001	2,0	100	16	4"	$\frac{5}{8}$ "
05022054001	2,5	112	18	$4 \frac{7}{16}$ "	$\frac{23}{32}$ "
05022056001	3,0	126	20	5"	$\frac{25}{32}$ "
05022058001	4,0	140	25	$5 \frac{1}{2}$ "	1"
05022060001	5,0	160	28	$6 \frac{5}{16}$ "	$1 \frac{3}{32}$ "
05022062001	6,0	180	32	$7 \frac{1}{16}$ "	$1 \frac{1}{4}$ "
05022063001	7,0	190	34	$7 \frac{1}{2}$ "	$1 \frac{5}{16}$ "
05022064001	8,0	200	36	8"	$1 \frac{7}{16}$ "
05022066001	10,0	219	40	$8 \frac{11}{16}$ "	$1 \frac{9}{16}$ "
05022067001	12,0	248	45	10"	$1 \frac{3}{4}$ "

¹⁾ Regular hexagon

950 PKL BM L-key, metric, BlackLaser



Application: Hexagon socket screws

Design: BlackLaser surface

Tip: Hex-Plus, ball-end hexagon on long arm

	mm	mm	mm	$\frac{1}{2}$ "	$\frac{1}{16}$ "
05027101001 ¹⁾	1,5	90	14	$3 \frac{1}{2}$ "	$\frac{9}{16}$ "
05027102001	2,0	100	16	4"	$\frac{5}{8}$ "
05027103001	2,5	112	18	$4 \frac{7}{16}$ "	$\frac{23}{32}$ "
05027104001	3,0	126	19	5"	$\frac{3}{4}$ "
05027105001	4,0	140	25	$5 \frac{1}{2}$ "	1"
05027106001	5,0	160	28	$6 \frac{5}{16}$ "	$1 \frac{3}{32}$ "
05027107001	6,0	180	32	$7 \frac{1}{16}$ "	$1 \frac{1}{4}$ "
05027110001	7,0	190	34	$7 \frac{1}{2}$ "	$1 \frac{5}{16}$ "
05027108001	8,0	200	36	8"	$1 \frac{7}{16}$ "
05027109001	10,0	219	40	$8 \frac{11}{16}$ "	$1 \frac{9}{16}$ "
05027111001	12,0	248	45	10"	$1 \frac{3}{4}$ "

¹⁾ Regular hexagon

L-Keys for Hexagon Socket Screws

The Hex-Plus profile extends the service life of hexagon socket screws

950 PKL L-key, imperial, BlackLaser



Application: Hexagon socket screws

Design: BlackLaser surface

Tip: Hex-Plus, ball-end hexagon on long arm

	⊙	L mm	L mm	L mm	L mm
05022079001 ¹⁾	0,05"	83	14	3 1/4"	9/16"
05022081001 ¹⁾	1/16"	91	15	3 1/2"	19/32"
05022068001	5/64"	100	16	4"	5/8"
05022070001	3/32"	112	18	4 7/16"	23/32"
05022071001	7/64"	119	19	4 3/4"	3/4"
05022072001	1/8"	126	20	5"	25/32"
05022073001	9/64"	132	23	5 3/16"	29/32"
05022074001	5/32"	140	25	5 1/2"	1"
05022076001	3/16"	160	25	6 5/16"	1"
05022078001	7/32"	180	27	7 1/16"	1 1/16"
05022080001	1/4"	190	34	7 1/2"	1 5/16"
05022082001	5/16"	200	36	8"	1 7/16"
05022095001	3/8"	212	38	8 3/8"	1 1/2"
05022096001	1/2"	224	40	9"	1 9/16"

¹⁾ Regular hexagon

950 PKS L-key, metric, chrome-plated



Application: Hexagon socket screws

Design: Short, chrome-plated

Tip: Hex-Plus, ball-end hexagon on long arm

	⊙	L mm	L mm	L mm	L mm
05133150001 ¹⁾	1,5	50	14	2"	9/16"
05133151001	2,0	56	16	2 7/32"	5/8"
05133152001	2,5	63	18	2 1/2"	23/32"
05133153001	3,0	71	20	2 3/4"	25/32"
05133154001	4,0	80	22	3"	29/32"
05133155001	5,0	90	25	3 1/2"	1"
05133156001	6,0	100	28	4"	1 3/32"
05133157001	8,0	112	32	4 7/16"	1 1/4"
05133158001	10,0	125	36	5"	1 5/16"

¹⁾ Regular hexagon

950 PKLS Long Arm Ballpoint Hex Key, metric, chrome plated



Application: For hexagon socket screws

Blade: Chrome plated, with extra short arm for use on screws that are difficult to access

Tip: Hex-Plus, ballpoint hexagon on long arm

	⊙	L mm	L mm	L mm	L mm
05022040001 ¹⁾	1,5	90	4,5	3 1/2"	11/16"
05022041001	2,0	100	5,5	4"	7/32"
05022042001	2,5	112	6,5	4 7/16"	1/4"
05022043001	3,0	126	7,5	5"	19/64"
05022044001	4,0	140	10,0	5 1/2"	25/64"
05022045001	5,0	160	12	6 5/16"	15/32"
05022046001	6,0	180	15	7 1/16"	19/32"
05022047001	8,0	200	19	8"	3/4"
05022048001	10,0	219	22	8 5/8"	7/8"

¹⁾ Regular hexagon



Application: Hexagon socket screws

Design: Chrome-plated

Tip: Hex-Plus

	⊙	L mm	L mm	L mm	L mm
05021600001 ¹⁾	1,5	90	14	3 1/2"	9/16"
05021605001	2,0	100	16	4"	5/8"
05021610001	2,5	112	18	4 7/16"	23/32"
05021615001	3,0	126	20	5"	25/32"
05021620001	4,0	140	25	5 1/2"	1"
05021625001	5,0	160	28	6 5/16"	1 3/32"
05021630001	6,0	180	32	7 1/16"	1 1/4"
05021632001	7,0	190	30	7 1/2"	1 1/4"
05021635001	8,0	200	36	8"	1 7/16"
05021640001	10,0	219	40	8 11/16"	1 9/16"
05021645001	12,0	250	45	10"	1 3/4"

¹⁾ Regular hexagon

950 L-key, metric, chrome-plated



Application: Hexagon socket screws
Blade: Chrome-plated
Tip: Hex-Plus

	⊙ mm	L ₁ mm	L ₂ mm	L ₃ mm	L ₄ mm
05021005001 ¹⁾	1,5	45	14	1 3/4"	9/16"
05021010001	2,0	50	16	2"	5/8"
05021015001	2,5	56	18	2 7/32"	23/32"
05021020001	3,0	63	20	2 1/2"	25/32"
05021025001	3,5	66	23	2 5/8"	29/32"
05021030001	4,0	70	25	2 3/4"	1"
05021035001	4,5	75	26	3"	1 1/32"
05021040001	5,0	80	28	3 1/8"	1 3/32"
05021045001	6,0	90	32	3 1/2"	1 1/4"
05021050001	7,0	95	34	3 3/4"	1 5/16"
05021055001	8,0	100	36	4"	1 7/16"
05021060001	9,0	106	38	4 3/16"	1 1/2"
05021065001	10,0	112	40	4 7/16"	1 9/16"
05021070001	11,0	120	43	4 3/4"	1 11/16"
05021075001	12,0	125	45	5"	1 3/4"
05021080001	13,0	132	50	5 3/16"	2"
05021085001 ¹⁾	14,0	140	56	5 1/2"	2 7/32"
05021090001 ¹⁾	17,0	160	63	6 5/16"	2 1/2"
05021095001 ¹⁾	19,0	180	70	7 1/16"	2 3/4"
05021100001 ¹⁾	22,0	200	80	8"	3 1/8"
05021105001 ¹⁾	24,0	224	90	9"	3 1/2"
05021110001 ¹⁾	27,0	250	100	10"	4"

¹⁾ Regular hexagon.

950 BM L-key, metric, BlackLaser



Application: Hexagon socket screws
Design: BlackLaser surface
Tip: Hex-Plus

	⊙ mm	L ₁ mm	L ₂ mm	L ₃ mm	L ₄ mm
05027201001 ¹⁾	1,5	45	14	1 3/4"	9/16"
05027202001	2,0	50	16	2"	5/8"
05027203001	2,5	56	18	2 7/32"	23/32"
05027204001	3,0	63	20	2 1/2"	25/32"
05027205001	3,5	66	23	2 5/8"	29/32"
05027206001	4,0	70	25	2 3/4"	1"
05027207001	4,5	75	26	3"	1 1/32"
05027208001	5,0	80	28	3 1/8"	1 3/32"
05027209001	6,0	90	32	3 1/2"	1 1/4"
05027210001	7,0	95	34	3 3/4"	1 5/16"
05027211001	8,0	100	36	4"	1 7/16"
05027213001	9,0	106	38	4 11/64"	1 1/2"
05027212001	10,0	112	40	4 7/16"	1 9/16"
05027214001	11,0	120	43	4 23/32"	1 11/16"
05027215001	12,0	125	45	5"	1 49/64"

¹⁾ Regular hexagon.



L-Key Sets for TORX® Screws

Powerful, ergonomic, long service life

967 SPKL/9 TORX® B0 Multicolour L-key set for tamper-proof TORX® screws, BlackLaser



9-piece set in a two-component clip. For recessed screws, it's often advantageous for the screw to be held on the L-key by magnetic force. The Wera clips with magnetiser/demagnetiser enable a magnetisation/demagnetisation of L-keys in a flash.

Application: TORX® socket screws with and without pin (B0 = bore hole)

Design: BlackLaser, durable plastic sleeve. The contrasting inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find the right tool.

Tip: TORX® on short arm, TORX® ball end on long arm

05024335001	
	967 SPKL 1 x TX 8x76 ¹⁾ ; 1 x TX 9x79 ¹⁾ ; 1 x TX 10x85 ²⁾ ; TORX® B0 1 x TX 15x90; 1 x TX 20x96; 1 x TX 25x104; Multicolour 1 x TX 27x112; 1 x TX 30x122; 1 x TX 40x132

¹⁾ Product without bore hole at the short and without ball-end at the long arm.

²⁾ Product without ball-end at the long arm.

967 L/9 TORX® HF L-key set with holding function, BlackLaser



9-piece set in a two-component clip

Application: TORX® socket screws

Blade: Round

Design: Holding function for TORX® screws made according to Acument Intellectual Properties specifications, BlackLaser surface

05024244001	
	967 L TORX® 1 x TX 8x76; 1 x TX 9x79; 1 x TX 10x85; HF 1 x TX 15x90; 1 x TX 20x96; 1 x TX 25x104; 1 x TX 27x112; 1 x TX 30x122; 1 x TX 40x132

967 SPKL/9 TORX® B0 Multicolour L-key set for tamper-proof TORX® screws, BlackLaser, SB


05073599001	 4013288 170125
	967 SPKL TORX® B0 Multicolour 1 x TX 8x76 ¹⁾ ; 1 x TX 9x79 ¹⁾ ; 1 x TX 10x85 ²⁾ ; 1 x TX 15x90; 1 x TX 20x96; 1 x TX 25x104; 1 x TX 27x112; 1 x TX 30x122; 1 x TX 40x132



¹⁾ Product without bore hole at the short and without ball-end at the long arm.

²⁾ Product without ball-end at the long arm.

967 PKL/9 TORX® L-key set, BlackLaser

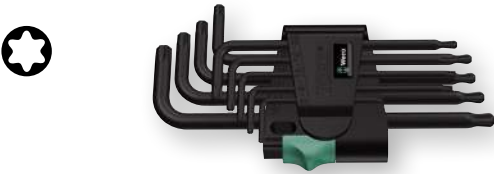

9-piece set in a two-component clip

Application: TORX® socket screws

Design: BlackLaser surface

Tip: TORX® on short arm, TORX® ball end on long arm

05024242001	
 967 PKL TORX®	1 x TX 8x76 ¹⁾ ; 1 x TX 9x79 ¹⁾ ; 1 x TX 10x85 ¹⁾ ; 1 x TX 15x90; 1 x TX 20x96; 1 x TX 25x104; 1 x TX 27x112; 1 x TX 30x122; 1 x TX 40x132

¹⁾ Product without ball-end at the long arm.

967 PKL/9 SB TORX® L-key set, BlackLaser

	 4013288
05073598001	106438
 967 PKL TORX®	1 x TX 8x76 ¹⁾ ; 1 x TX 9x79 ¹⁾ ; 1 x TX 10x85 ¹⁾ ; 1 x TX 15x90; 1 x TX 20x96; 1 x TX 25x104; 1 x TX 27x112; 1 x TX 30x122; 1 x TX 40x132

¹⁾ Product without ball-end at the long arm.



L-Keys

Suitable for TORX® and TORX PLUS® Screws

967 SPKL TORX® B0 L-key Multicolour



Application: TORX® socket screws with and without pin (B0 = bore hole)

Design: BlackLaser, durable plastic sleeve. The contrasting inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find the right tool.

Tip: TORX® on short arm, TORX® ball end on long arm

			L ₁ mm	L ₂ mm	L ₃ "	L ₄ "
05024350001 ¹⁾		TX 8	76	16	3"	5/8"
05024351001 ¹⁾		TX 9	79	16	3 1/8"	5/8"
05024352001 ²⁾		TX 10	85	17	3 3/8"	21/32"
05024353001		TX 15	90	18	3 1/2"	23/32"
05024354001		TX 20	96	19	3 3/4"	3/4"
05024355001		TX 25	104	21	4 1/8"	27/32"
05024356001		TX 27	112	22	4 7/16"	29/32"
05024357001		TX 30	122	24	4 13/16"	1"
05024358001		TX 40	132	27	5 3/16"	1 1/16"

¹⁾ Product without bore hole at the short and without ball-end at the long arm.

²⁾ Product without ball-end at the long arm.

967 PKL TORX® L-key, BlackLaser



Application: TORX® socket screws

Design: BlackLaser surface

Tip: TORX® on short arm, TORX® ball end on long arm

			L ₁ mm	L ₂ mm	L ₃ "	L ₄ "
05024199001 ¹⁾		TX 8	76	16	3"	5/8"
05024100001 ¹⁾		TX 9	79	16	3 1/8"	5/8"
05024105001 ¹⁾		TX 10	85	17	3 3/8"	21/32"
05024200001		TX 15	90	18	3 1/2"	23/32"
05024202001		TX 20	96	19	3 3/4"	3/4"
05024204001		TX 25	104	21	4 1/8"	27/32"
05024206001		TX 27	112	22	4 7/16"	29/32"
05024208001		TX 30	122	24	4 13/16"	1"
05024210001		TX 40	132	27	5 3/16"	1 1/16"

¹⁾ Product without ball-end at the long arm.

967 L TORX® HF L-key with holding function, BlackLaser



Application: TORX® socket screws

Blade: Round

Design: Holding function for TORX® screws made according to Acument Intellectual Properties specifications, BlackLaser surface

					
		mm	mm		
05024160001	TX 8	76	16	3"	5/8"
05024161001	TX 9	79	16	3 1/8"	5/8"
05024162001	TX 10	85	17	3 1/4"	21/32"
05024163001	TX 15	90	18	3 1/2"	23/32"
05024164001	TX 20	96	19	3 3/4"	3/4"
05024165001	TX 25	104	21	4 1/8"	27/32"
05024166001	TX 27	112	22	4 1/16"	29/32"
05024167001	TX 30	122	24	4 13/16"	1"
05024168001	TX 40	132	27	5 3/16"	1 1/16"

967 TORX® L-key, BlackLaser



Application: TORX® socket screws

Design: BlackLaser surface

Tip: TORX®

					
		mm	mm		
05024001001	TX 6	42	16	1 5/8"	5/8"
05024002001	TX 7	48	16	1 7/8"	5/8"
05024003001	TX 8	48	16	1 7/8"	5/8"
05024004001	TX 9	48	16	1 7/8"	5/8"
05024005001	TX 10	51	17	2"	21/32"
05024008001	TX 15	54	18	2 1/8"	23/32"
05024010001	TX 20	57	19	2 1/4"	3/4"
05024012001	TX 25	60	20	2 3/8"	25/32"
05024013001	TX 27	64	21	2 1/2"	27/32"
05024015001	TX 30	70	24	2 3/4"	1"
05024020001	TX 40	76	26	3"	1 1/32"

Tip

The HF profile



In tight assembly or disassembly situations, for example in engine compartments, it is not possible to securely hold the screw with the hand on the screwdriver, and the screw subsequently often gets lost. Lengthy searches or the loss of the screw (with the associated danger that could bring about) are the consequence. The HF tools

developed by Wera are ideal because they feature an optimised geometry of the original TORX® profile. The wedging forces resulting from the surface pressure between the drive tip and the screw profile mean that the screw is securely held on the tool!



"Take it easy"



"Take it easy" tool finder system – with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).

Offset Screwdrivers

Suitable for slotted, Phillips and Pozidriv screws

919 PH Offset Screwdriver



Application: For Phillips screws

Blade: 90° + 180°, mat nickel

		 mm	 mm	 "	 "
05017205001	PH1+2	125	20	5"	$\frac{25}{32}$ "

919 PZ Offset Screwdriver



Application: Suitable for Pozidriv-screws

Blade: 90° + 180°, BlackLaser

		 mm	 mm	 "	 "
05017305001	PZ1+2	125	20	5"	$\frac{25}{32}$ "

920 A Offset Screwdriver



Application: For Slotted screws

Blade: 90° + 180°, mat nickel

	 mm	 mm	 mm	 "	 "
05017405001	4,0+4,0	100	12	4"	$\frac{1}{2}$ "
05017410001	5,5+5,5	125	16	5"	$\frac{5}{8}$ "
05017415001	8,0+8,0	150	20	6"	$\frac{25}{32}$ "





Kraftform Kompakt

	Kraftform Kompakt 10, 12	222
	Kraftform Kompakt 20, 22, 25, 26, 28	224
	Kraftform Kompakt 40, 41	228
	Kraftform Kompakt 50	229
	Kraftform Kompakt 60, 62	230
	Kraftform Kompakt 70, 71	236
	Kraftform Kompakt 100	237
	Kraftform Kompakt User Sets	238
	Bitholding Screwdrivers And Adaptors	242
	Kraftform Kompakt Vario With Ratchet Function	246
	Kraftform Kompakt Vario Without Ratchet Function	250



Kraftform Kompakt

Why is the right tool so often not at hand? The reason: too many tools and overly-heavy tool bags can make it bothersome to carry them onsite.

So for us it was a clear challenge: to design a tool that is suitable for a whole host of applications and can be easily taken along to jobs at other sites.

Our solution: Kraftform Kompakt tools. A handle into which blades with a range of different profiles can be inserted. Compactly and protectively housed in a light and robust textile pouch or plastic box.



The sets come with a Kraftform handle, quick-release chuck and bits for manual and power tool operations.



The handle/interchangeable blade system permits rapid exchange of the blades needed for a wide range of applications.



The tools can be stored and carried either in a solid plastic case or a robust pouch. In this way the tool is always to hand. Kraftform Kompakt Sets with Zyklop Speed or Zyklop Mini ratchet can be found on pages 134, 183 and 186.



Kraftform Kompakt user ranges – the new special sets – compact yet very versatile. Suitable for all sanitary, wood, metal or electrical applications.

Kraftform Kompakt 10, 12

There is no screwdriver set that is more compact

Kraftform Kompakt 10



10-piece set

1 bitholding screwdriver 813 R Kraftform with quick-release chuck Rapidaptor

05056653001		
●	813 R	1 x 1/4"x90
+	851/1 TZ PH	1 x PH 1x25; 1 x PH 2x25
+	855/1 TZ PZ	1 x PZ 1x25; 1 x PZ 2x25
+	867/1 TZ TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25
●	800/1 TZ	1 x 0,5x4,0x25; 1 x 1,0x5,5x25

Kraftform Kompakt 12



10-piece set

1 bitholding screwdriver 813 R Kraftform with quick-release chuck Rapidaptor

05135942001		
●	813 R	1 x 1/4"x90
+	867/1 TZ TORX®	1 x TX 5x25; 1 x TX 6x25; 1 x TX 7x25; 1 x TX 8x25; 1 x TX 9x25
+	851/1 J	1 x PH 00x25x2,0; 1 x PH 0x25x2,5; 1 x PH 1x25x3,0
+	851/1 TZ PH	1 x PH 1x25






Kraftform Kompakt 20, 22, 25, 26, 28

Telescopic blade models

Kraftform Kompakt 20 A



Application: Suitable for 1/4" DIN ISO 1173 C 6.3 and E 6.3 hexagon socket insert bits and Wera Series 1 and 4

Design: Attachment, telescopic, Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Handle: Kraftform with non-roll feature, multi-component, integrated magazine

05051019001	
889/4 R	1 x 1/4"x100
851/1 Z PH	1 x PH 1x25; 1 x PH 2x25
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25
800/1 Z	1 x 1,0x5,5x25; 1 x 1,2x6,5x25

Kraftform Kompakt 22 with pouch



Application: Suitable for 1/4" DIN ISO 1173 C 6.3 and E 6.3 hexagon socket insert bits and Wera Series 1 and 4

Design: Attachment, telescopic, Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Handle: Kraftform with non-roll feature, multi-component, integrated magazine

05051023001	
889/4 R	1 x 1/4"x100
855/1 Z PZ	1 x PZ 1x25; 2 x PZ 2x25
867/1 Z TORX	1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25

Kraftform Kompakt 20 with pouch



Application: Suitable for 1/4" DIN ISO 1173 C 6.3 and E 6.3 hexagon socket insert bits and Wera Series 1 and 4

Design: Attachment, telescopic, Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Handle: Kraftform with non-roll feature, multi-component, integrated magazine

05051021001	
889/4 R	1 x 1/4"x100
851/1 Z PH	1 x PH 1x25; 1 x PH 2x25
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25
800/1 Z	1 x 1,0x5,5x25; 1 x 1,2x6,5x25

Kraftform Kompakt 25 with pouch



Application: Suitable for 1/4" DIN ISO 1173 C 6.3 and E 6.3 hexagon socket insert bits and Wera Series 1 and 4

Design: Attachment, telescopic, Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Handle: Kraftform with non-roll feature, multi-component, integrated magazine

05051024001	
889/4 R	1 x 1/4"x100
851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
800/1 Z	1 x 0,6x4,5x25; 1 x 1,0x5,5x25; 1 x 1,2x6,5x25

Kraftform Kompakt 26 with pouch



Application: Suitable for 1/4" DIN ISO 1173 C 6.3 and E 6.3 hexagon socket insert bits and Wera Series 1 and 4

Design: Attachment, telescopic, Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Handle: Kraftform with non-roll feature, multi-component, integrated magazine

05051025001		
●○	889/4 R	1 x 1/4"x100
⊕	851/1 Z PH	1 x PH 1x25; 1 x PH 2x25
●	800/1 Z	1 x 1,0x5,5x25; 1 x 1,2x6,5x25
○	868/1 Z	1 x # 1x25; 1 x # 2x25

Tip

Telescopic blade, integrated bit magazine, Rapidaptor technology



The sets in the series Kraftform Kompakt 20 are really something. A 2 position telescopic blade can be retracted into the handle for confined space operation or extended for more reach. It can also be removed and used as a 100mm bit holder in the power tool. Six bits are conveniently integrated into a push-button opening bit magazine.

The Rapidaptor technology ensures rapid one hand bit changes, press-in auto bit lock and a secure positioning when used in power tools thanks to the free-turning sleeve.

The telescopic blade



When the unique telescopic blade is lowered into the handle, fast, easy screw-driving action is possible, even in the tightest spots! By pushing the clamping sleeve, the telescopic blade can be extended out of the handle and the compact tool becomes a full-sized screwdriver. If the clamping sleeve is pushed again the telescopic blade can be taken out of the handle, and be used as a machine bit adaptor.



Kraftform Kompakt 20, 22, 25, 26, 28

Telescopic blade models

Kraftform Kompakt 28 SB



Application: Suitable for 1/4" DIN ISO 1173 C 6.3 hexagon socket insert bits and Wera Series 1

Design: Attachment, telescopic, with stainless steel sleeve, retaining ring, and strong permanent magnet

Handle: Kraftform with non-roll feature, multi-component, integrated magazine

05073240001	
	851/1 Z PH 1 x PH 1x25; 1 x PH 2x25
	855/1 Z PZ 1 x PZ 1x25; 1 x PZ 2x25
	800/1 Z 1 x 1,0x5,5x25; 1 x 1,2x6,5x25

Kraftform Kompakt 28 with pouch



Application: Suitable for 1/4" DIN ISO 1173 C 6.3 hexagon socket insert bits and Wera Series 1

Design: Attachment, telescopic, with stainless steel sleeve, retaining ring, and strong permanent magnet

Handle: Kraftform with non-roll feature, multi-component, integrated magazine

05134491001	
	800/1 Z 1 x 1,0x5,5x25; 1 x 1,2x6,5x25
	851/1 Z PH 1 x PH 1x25; 1 x PH 2x25
	855/1 Z PZ 1 x PZ 1x25; 1 x PZ 2x25

Pouch for Kraftform Kompakt 20 sets, empty



05671386001	170,0 70,0



Kraftform Kompakt 40 and 41

Bits of 89 mm in length

Kraftform Kompakt 40



Pouch with 89 mm bits

7-piece set

1 Kraftform bitholding screwdriver 816 R with Rapidaptor quick-release chuck

05059298001		
●	816 R	1 x 1/4"x119
⊕	851/4 Z PH	1 x PH 1x89; 1 x PH 2x89
⊕	855/4 Z PZ	1 x PZ 1x89; 1 x PZ 2x89
⊖	800/4 Z	1 x 1,0x5,5x89; 1 x 1,2x6,5x89

Kraftform Kompakt 41



Pouch with 89 mm bits

11-piece set

1 Kraftform bitholding screwdriver 816 R with Rapidaptor quick-release chuck


05059299001		
●	816 R	1 x 1/4"x119
⊕	851/4 Z PH	1 x PH 1x89; 1 x PH 2x89; 1 x PH 3x89
⊕	855/4 Z PZ	1 x PZ 1x89; 1 x PZ 2x89; 1 x PZ 3x89
⊗	867/4 Z TORX® B0	1 x TX 15x89; 1 x TX 20x89; 1 x TX 25x89; 1 x TX 30x89



Kraftform Kompakt 50

Telescopic blade model

Kraftform Kompakt 50



14-piece set

1 Kraftform bitholding screwdriver 817 R and telescopic blade with quick-release chuck Rapidaptor

05056656001		
817 R	1 x 1/4"x133	
889/4 R	1 x 1/4"x100	
851/1 Z PH	1 x PH 1x25; 1 x PH 2x25	
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25	
867/1 Z TORX® BO	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25	
800/1 Z	1 x 0,6x4,5x25; 1 x 1,0x5,5x25	

Tip

The telescopic blade



When the unique telescopic blade is lowered into the handle, fast, easy screw-driving action is possible, even in the tightest spots! By pushing the clamping sleeve, the telescopic blade can be extended out of the handle and the compact tool becomes a full-sized screwdriver. If the clamping sleeve is pushed again the telescopic blade can be taken out of the handle, and be used as a machine bit adaptor.



Kraftform Kompakt 60, 62

Bits of 89 mm in length

Kraftform Kompakt 60 Torque 1.2 - 3.0 Nm



Pouch with 89 mm bits

17-piece set

1 Series 7400 Kraftform adjustable torque screwdriver (1.2-3.0 Nm) with Rapidaptor quick-release chuck

05059293001	
7400	1 x 7441x1/4"x1,2-3,0x155
851/4 Z PH	1 x PH 1x89; 1 x PH 2x89; 1 x PH 3x89
855/4 Z PZ	1 x PZ 1x89; 1 x PZ 2x89; 1 x PZ 3x89
867/4 Z TORX® B0	1 x TX 10x89; 1 x TX 15x89; 1 x TX 20x89; 1 x TX 25x89; 1 x TX 30x89
800/4 Z	1 x 1,0x5,5x89
840/4 Z Hex-Plus	1 x 3,0x89; 1 x 4,0x89; 1 x 5,0x89; 1 x 6,0x89

Kraftform Kompakt 60, stainless



Pouch with 89 mm bits, stainless steel

17-piece set

1 Kraftform stainless bitholding screwdriver 3816 R with Rapidaptor quick-release chuck

05071116001	
3816 R	1 x 1/4"x119
3851/4	1 x PH 1x89; 1 x PH 2x89; 1 x PH 3x89
3855/4	1 x PZ 1x89; 1 x PZ 2x89; 1 x PZ 3x89
3867/4 TORX® B0	1 x TX 10 B0x89; 1 x TX 15 B0x89; 1 x TX 20 B0x89; 1 x TX 25 B0x89; 1 x TX 30 B0x89
3800/4	1 x 1,0x5,5x89
3840/4 Hex-Plus	1 x 3,0x89; 1 x 4,0x89; 1 x 5,0x89; 1 x 6,0x89

Kraftform Kompakt 60, imperial, stainless



Pouch with 89 mm bits, stainless steel

17-piece set

1 Kraftform stainless bitholding screwdriver 3816 R with Rapidaptor quick-release chuck

05071117001		
●	3816 R	1 x 1/4"x119
+	3851/4	1 x PH 1x89; 1 x PH 2x89; 1 x PH 3x89
⊕	3867/4 TORX® B0	1 x TX 10 B0x89; 1 x TX 15 B0x89; 1 x TX 20 B0x89; 1 x TX 25 B0x89; 1 x TX 30 B0x89
⊖	3800/4	1 x 1,0x5,5x89
⊙	3840/4 Hex-Plus	1 x 3/32"x89; 1 x 1/8"x89; 1 x 5/32"x89; 1 x 3/16"x89
⊠	3868/4 Square-Plus	1 x # 1x89; 1 x # 2x89; 1 x # 3x89

Tip



Adjustable torque screwdriver



Simple setting of the required torque by hand. Easy-to-read scale value.

Measurement accuracy is $\pm 6\%$ in accordance with the standard EN ISO 6789. Distinctly audible and noticeable excess-load signal when the pre-set torque is reached.



Vacuum ice-hardened



The stainless steel tools from Wera are vacuum ice-hardened and have the hardness and strength needed for screw connections. There are no limitations to the industrial applications they are suitable for.



Kraftform Kompakt 60, 62

Bits of 89 mm in length

Kraftform Kompakt 60



Pouch with 89 mm bits

17-piece set

1 Kraftform bitholding screwdriver 816 R with Rapidaptor quick-release chuck

05059295001		
816 R	1 x 1/4"x119	
851/4 Z PH	1 x PH 1x89; 1 x PH 2x89; 1 x PH 3x89	
855/4 Z PZ	1 x PZ 1x89; 1 x PZ 2x89; 1 x PZ 3x89	
867/4 Z TORX® BO	1 x TX 10x89; 1 x TX 15x89; 1 x TX 20x89; 1 x TX 25x89; 1 x TX 30x89	
800/4 Z	1 x 1,0x5,5x89	
840/4 Z Hex-Plus	1 x 3,0x89; 1 x 4,0x89; 1 x 5,0x89; 1 x 6,0x89	

Kraftform Kompakt 60, imperial




Pouch with 89 mm bits

17-piece set

1 Kraftform bitholding screwdriver 816 R with Rapidaptor quick-release chuck

05051042001		
816 R	1 x 1/4"x119	
851/4 Z PH	1 x PH 1x89; 1 x PH 2x89; 1 x PH 3x89	
867/4 Z TORX® BO	1 x TX 10x89; 1 x TX 15x89; 1 x TX 20x89; 1 x TX 25x89; 1 x TX 30x89	
800/4 Z	1 x 1,0x5,5x89	
840/4 Z Hex-Plus	1 x 3/32"x89; 1 x 1/8"x89; 1 x 5/32"x89; 1 x 3/16"x89	
868/4 Square-Plus	1 x # 1x89; 1 x # 2x89; 1 x # 3x89	

Kraftform Kompakt 60 KK




Pouch with 89 mm bits

17-piece set

1 Kraftform bitholding screwdriver 816 R with Rapidaptor quick-release chuck

05059294001		
816 R	1 x 1/4"x119	
851/4 Z PH	1 x PH 1x89; 1 x PH 2x89; 1 x PH 3x89	
855/4 Z PZ	1 x PZ 1x89; 1 x PZ 2x89; 1 x PZ 3x89	
867/4 KK	1 x TX 10x89; 1 x TX 15x89; 1 x TX 20x89; 1 x TX 25x89; 1 x TX 30x89; 1 x TX 40x89	
842/4	1 x 3,0x89; 1 x 4,0x89; 1 x 5,0x89; 1 x 6,0x89	

Kraftform Kompakt 62

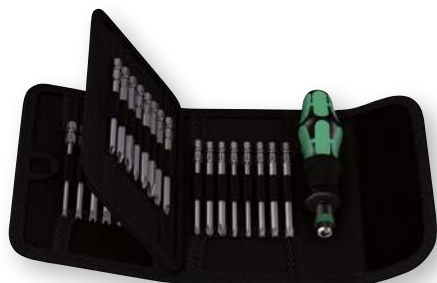

Pouch with 89 mm bits

33-piece set

1 Kraftform bitholding screwdriver 816 R with Rapidaptor quick-release chuck

05059297001		
816 R	1 x 1/4"x119	
857/4 Z Spanner	1 x 4x89; 1 x 6x89; 1 x 8x89; 1 x 10x89	
851/4 Z PH	1 x PH 1x89; 1 x PH 2x89; 1 x PH 3x89	
855/4 Z PZ	1 x PZ 1x89; 1 x PZ 2x89; 1 x PZ 3x89	
867/4 Z TORX® BO	1 x TX 8x89; 1 x TX 10x89; 1 x TX 15x89; 1 x TX 20x89; 1 x TX 25x89; 1 x TX 27x89; 1 x TX 30x89; 1 x TX 40x89	
800/4 Z	1 x 1,2x6,5x89	
840/4 Z Hex-Plus BO	1 x 2,0x89; 1 x 2,5x89; 1 x 3,0x89; 1 x 4,0x89; 1 x 5,0x89; 1 x 6,0x89	
871/4 TORQ-SET® Mplus	1 x 6x89; 1 x 8x89; 1 x 10x89	
875/4 TRI-WING®	1 x 1x89; 1 x 2x89; 1 x 3x89; 1 x 4x89	

Pouch for up to 17-piece sets Kraftform Kompakt, empty




	mm	mm
05671387001	170,0	120,0

Tip



Ball tip



The spherical drive profile means that it is possible to swivel the axis of the tool to that of the screw, and therefore enable angled, "around-the-corner" screwdriving jobs.

How can time wasted by using the wrong screwdriver be avoided?



Frequently, users have to work with their tools at a fixed workplace location as well as at external sites. Just as frequently, it is only on site that a decision is taken as to whether to work manually or with a power tool. The Kraftform Kompakt tool sets equip the user for both types of operation with just single set. Additionally, the sets

are kept in belt pouches or plastic cases. This keeps them secure and clean and means that they are clearly arranged for easy tool selection, something that is very practical when they are to be used or transported.







Kraftform Kompakt 70 and 71

Kraftform handle, Rapidaptor and 30 bits

Kraftform Kompakt 70 universal



32-piece set

1 Kraftform bitholding screwdriver 816 R with Rapidaptor quick-release chuck,
1 universal bit holder 889/4/1 K Rapidaptor

05057110001		
●	816 R	1 x 1/4"x119
●○	889/4/1 K	1 x 1/4"x50
+	851/1 TZ PH	3 x PH 1x25; 3 x PH 2x25; 3 x PH 3x25
+	855/1 TZ PZ	3 x PZ 1x25; 3 x PZ 2x25; 3 x PZ 3x25
+	867/1 Z TORX® B0	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25
●	800/1 TZ	1 x 0,6x4,5x25; 1 x 1,0x5,5x25; 1 x 1,2x6,5x25
○	840/1 Z Hex-Plus	1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25

Kraftform Kompakt 71 security



32-piece set

1 Kraftform bitholding screwdriver 816 R with Rapidaptor quick-release chuck,
1 universal bit holder 889/4/1 K Rapidaptor

05057111001		
●	816 R	1 x 1/4"x119
●○	889/4/1 K	1 x 1/4"x50
+	867/1 Z TORX® B0	1 x TX 7x25; 1 x TX 8x25; 1 x TX 9x25; 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25
●	840/1 Z Hex-Plus B0	1 x 2,0x25; 1 x 2,5x25; 1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25
○	868/1 Z	1 x # 0x25; 1 x # 1x25; 1 x # 2x25; 1 x # 3x25
+	871/1 TORQ-SET® Mplus 25 mm	1 x 6x25; 1 x 8x25; 1 x 10x25; 1 x 0x1/4"x25
+	875/1 TRI-WING® 25 mm	1 x 1x25; 1 x 2x25; 1 x 3x25
+	857/1 Z Spanner	1 x 4x25; 1 x 6x25; 1 x 8x25; 1 x 10x25



Kraftform Kompakt 100

Bits, Bit Holders and L-keys in one tool set

Kraftform Kompakt 100



52-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility.
Compact tool set with screwdriving tools. 1 hand holder Rapidaptor with quick-release chuck; 1 bit holder Rapidaptor with quick-release chuck; 30 BiTorsion bits (25 mm length) for long service life, tough (BTZ), for universal use, extra-hard (BTH), 12 Impaktor bits (50 mm length) for an above-average service life even under extreme conditions, 8 L-keys with Hex-Plus profile (reduces the notching effect that is damaging for the head of the screw) ball-end on long arm; extremely robust textile box, extremely robust, for long service life, can be stored in a spacesaving upright position; textile material for surface protection.

05057460001	
●	813 R 1 x 1/4"x90
●○	889/4/1 K 1 x 1/4"x50
+	851/1 BTZ PH 2 x PH 1x25; 4 x PH 2x25; 2 x PH 3x25
+	851/4 IMP DC 2 x PH 2x50; 1 x PH 3x50
+	855/1 BTH PZ 2 x PZ 1x25; 4 x PZ 2x25; 2 x PZ 3x25
+	855/4 IMP DC 2 x PZ 2x50; 1 x PZ 3x50
⊗	867/1 TORX® 2 x TX 10x25; 2 x TX 15x25; 3 x TX 20x25; BTZ 2 x TX 25x25; 2 x TX 30x25; 1 x TX 40x25
⊗	867/4 IMP DC 1 x TX 25x50; 1 x TX 30x50; 1 x TX 40x50
●	800/1 BTZ 1 x 0,8x5,5x25; 1 x 1,0x5,5x25
○	840/4 IMP DC 1 x 4,0x50; 1 x 5,0x50; 1 x 6,0x50
○	950 PKS 1 x 1,5x50 ¹⁾ ; 1 x 2,0x56; 1 x 2,5x63; 1 x 3,0x71; 1 x 4,0x80; 1 x 5,0x90; 1 x 6,0x100; 1 x 8,0x112

¹⁾ Regular hexagon



Kraftform Kompakt user-specific sets

Kraftform Kompakt W 1 Maintenance



35-piece set; in surface-protecting, compact textile box, highly robust; low volume and weight for simplified mobility.

Compact tool set with the most important screwdriving tools for maintenance jobs both indoors as well as outdoors. VDE hand holder including 12 VDE blades; 1 JOKER double open-ended wrench with holding function, limit stop, small return angle and extremely high-grip toothing; incl. the incredibly fast $\frac{1}{4}$ " Zyklop Speed ratchet with accessories; 8 manual and power tool sockets in the dimensions 5.5-13, 1 universal bit holder; 7 25mm bits; 1 screw gripper to firmly hold screws; 1 voltage tester 247; textile box that is very robust and durable; can be positioned upright in the workshop shelf for tidy storage; additional surface protection thanks to the textile outer material; low weight and volume for simplified mobility.

05135926001		
817 VDE	1 x 9x102	
KK 60 i	1 x 0,4x2,5x154	
KK 60 iS	1 x 0,6x3,5x154; 1 x 0,8x4,0x154; 1 x 1,0x5,5x154	
KK 62 iS	1 x PH 1x154; 1 x PH 2x154	
KK 65 iS PZ	1 x PZ 1x154; 1 x PZ 2x154	
KK 67 i TORX®	1 x TX 10x154	
KK 67 iS TORX®	1 x TX 15x154; 1 x TX 20x154; 1 x TX 25x154	
1440	1 x 4,5 - 6,0x41,0	
247	1 x 0,5x3,0x70	
Joker Double	1 x 10x13x167	
8000 A	1 x 1/4"x152,0	
8784 A1	1 x 1/4"x1/4"x37,0	
8794 SA	1 x 1/4"x75,0	
8790 HMA	1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0; 1 x 11,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0	
893/4/1 K	1 x 1/4"x50	
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25	
840/1 Z Hex-Plus	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25	
867/1 Z TORX®	1 x TX 25x25	

Product not available in the USA and Canada.

Kraftform Kompakt H 1 Woodcraft



41-piece set; in surface-protecting, compact textile box, highly robust; low volume and weight for simplified mobility.

Compact tool set with the 41 most important screwdriving tools for jobs involving wood: including the robust Bit Ratchet Zyklop Mini with extension and socket adaptor; 8 manual and power tool sockets in the dimensions 5.5-13; 1 hand holder 816 RA with ratchet function, fine toothing for small return angle, switch-over ring (right, fixed, left), maximum torque 50 Nm and bit take-up with Rapidaptor technology; 1 universal bit holder; 6 bits of 25mm in length; 16 bits of 89 mm in length; 5 twist drill bits for wood with a diameter of 3-8mm; 1 screw gripper to firmly hold screws; 1 voltage tester 247.

05135939001		
816 RA	1 x 1/4"x142,0	
8001 A	1 x 1/4"x87,0	
870/1	1 x 1/4"x25	
8794 SA	1 x 1/4"x75,0	
8790 HMA	1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0	
893/4/1 K	1 x 1/4"x50	
851/4 Z PH	1 x PH 1x89; 1 x PH 2x89; 1 x PH 3x89	
855/4 Z PZ	1 x PZ 1x89; 1 x PZ 2x89; 1 x PZ 3x89	
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25; 1 x PZ 3x25	
867/4 Z TORX®	1 x TX 10x89; 1 x TX 15x89; 1 x TX 20x89; 1 x TX 25x89; 1 x TX 30x89	
867/1 Z TORX®	1 x TX 20x25; 1 x TX 25x25	
840/4 Z Hex-Plus	1 x 3,0x89; 1 x 4,0x89; 1 x 5,0x89; 1 x 6,0x89	
800/4 Z	1 x 1,0x5,5x89	
800/1 Z	1 x 1,0x5,5x25	
849 HSS	1 x 3,0x70,0; 1 x 4,0x74,0; 1 x 5,0x85,0; 1 x 6,0x95,0; 1 x 8,0x110,0	
247	1 x 0,5x3,0x70	
1441	1 x 4,5 - 6,0x41,0	

Product not available in the USA and Canada.

Kraftform Kompakt M 1 Metal



39-piece set; in surface-protecting, compact textile box, highly robust; low volume and weight for simplified mobility.

Compact tool set with the 39 most important screwdriving tools for jobs involving metal:
including the incredibly fast $\frac{1}{4}$ " Zyklop Speed ratchet with accessories;
7 manual and power tool sockets in the dimensions 5.5-13; 1 bit hand holder;
13 bits of 89 mm in length; 6 combination screw tap bits; 6 twist drill bits for metal with a diameter of 3-10mm; 1 screw gripper to firmly hold screws;
1 voltage tester 247; textile box that is very robust and durable; can be positioned upright in the workshop shelf for tidy storage; additional surface protection thanks to the textile outer material; low weight and volume for simplified mobility.

05135928001	
8000 A	1 x 1/4"x152,0
8794 LA	1 x 1/4"x150,0
8794 A	1 x 1/4"x56,0
8784 A1	1 x 1/4"x1/4"x37,0
816 R	1 x 1/4"x119
8790 HMA	1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0
851/4 Z PH	1 x PH 1x89; 1 x PH 2x89; 1 x PH 3x89
840/4 Z Hex-Plus	1 x 3,0x89; 1 x 4,0x89; 1 x 5,0x89; 1 x 6,0x89
867/4 Z TORX®	1 x TX 10x89; 1 x TX 15x89; 1 x TX 20x89; 1 x TX 25x89; 1 x TX 30x89
800/4 Z	1 x 1,0x5,5x89
847 HSS	1 x 2,5x36,0; 1 x 3,3x39,0; 1 x 4,2x41,0; 1 x 5,0x44,0; 1 x 6,8x51,0; 1 x 8,5x59,0
848 HSS	1 x 3,0x38,0; 1 x 4,0x44,0; 1 x 5,0x50,0; 1 x 6,0x50,0; 1 x 8,0x51,0; 1 x 10,0x54,0
1441	1 x 4,5 - 6,0x41,0
247	1 x 0,5x3,0x70

Product not available in the USA and Canada.


Tip

Kraftform Kompakt user ranges



Kraftform Kompakt user ranges – the new special sets – compact yet very versatile. Suitable for all sanitary, wood, metal or electrical applications.

Kraftform Kompakt H1 Wood



Compact tool set with the 41 most important screwdriving tools for jobs involving wood.

Kraftform Kompakt W1 Maintenance



The perfect set for diverse maintenance jobs both indoors as well as outdoors - applications: electronics, mechatronics, building technology, photovoltaic etc. etc.

Kraftform Kompakt M1 Metal



Compact tool set with the 39 most important screwdriving tools for jobs involving metal.



Kraftform Kompakt user-specific sets

Kraftform Kompakt SH 1 PlumbKit



2 Joker combination ratchet wrenches with special retaining plate to prevent slipping/loss of the screw and more power transfer, 1 Zyklop ratchet 8000 A (1/4") for rapid, powerful operation, 3 Zyklop sockets 8790 HMA for manual and power tool applications, 1 Zyklop adapter 8784 A1 for bits, 6 TORX® HF bits 867/4 with holding function for TORX® screws for secure hold without any loss of the screw, 1 voltage tester 247, 2 Kraftform Series 100 VDE slotted screwdrivers 160 i and 160 iS for safe work up to 1,000 volts (160 iS has a reduced blade diameter with integrated protective insulation to allow sunken screw and spring elements to be reached and actuated), 1 Kraftform chisel driver 932 A (slotted) with hexagon blade throughout and integrated impact cap for screwdriving and simple chiselling jobs, 2 socket wrench screwdrivers 395 H0 with hollow shaft for the tightening or loosening of screws on long bolts as well as for jammed screws.

05135927001		
	Joker	1 x 10x159; 1 x 13x177
⊙	8000 A	1 x 1/4"x152,0
⊙	8790 HMA	1 x 7,0x23,0; 1 x 10,0x23,0; 1 x 13,0x23,0
⊙	8784 A1	1 x 1/4"x1/4"x37,0
⊙	867/4 TORX® HF	1 x TX 10x50; 1 x TX 15x50; 1 x TX 20x50; 1 x TX 25x50; 1 x TX 30x50; 1 x TX 40x50
⊕	851/4 Z PH	1 x PH 1x89; 1 x PH 2x89
⊙	840/4 Z Hex-Plus	1 x 3,0x89; 1 x 4,0x89; 1 x 5,0x89; 1 x 6,0x89
⊖	247	1 x 0,5x3,0x70
⊖	160 iS	1 x 0,6x3,5x100
⊖	160 i VDE	1 x 1,0x5,5x125
⊖	932 A	1 x 1,2x7,0x125
⊙	395 H0	1 x 10,0x80; 1 x 13,0x80

Product not available in the USA and Canada.



Bitholding Screwdrivers and Adaptors

Suitable for hand and power tool applications

3816 R Bit-holding screwdriver with Rapidaptor quick-release chuck, stainless



Application: Suitable for 1/4" hexagon insert bits, DIN ISO 1173 C 6.3 and E 6.3 and Wera Series 1 and 4

Drive: 1/4" hexagon with Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Handle: Kraftform with non-roll feature, multi-component

		 mm
05051465001	1/4"	119

813 R Bitholding screwdriver with Rapidaptor quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173 C 6.3 and E 6.3 hexagon insert bits and Wera Series 1 and 4

Drive: 1/4" hexagon with Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology, magnetic

Handle: Kraftform with non-roll feature, multi-component

		 mm
05051272001	1/4"	90

816 R Bitholding screwdriver with Rapidaptor quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173 C 6.3 and E 6.3 hexagon insert bits and Wera Series 1 and 4

Drive: 1/4" hexagon with Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology, magnetic

Handle: Kraftform with non-roll feature, multi-component

		 mm
05051462001	1/4"	119

816 R SB Bitholding screwdriver with Rapidaptor quick-release chuck

		 mm
05073540001	1 x 1/4"x119	106032

4013288



489 R T-handle Rapidaptor



Application: Suitable for 1/4" DIN ISO 1173 C 6.3 and E 6.3 hexagon insert bits und Wera Series 1 and 4

Drive: 1/4" hexagon with Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology, magnetic

Handle: T-handle, multi-component

		 mm	 mm	 mm	 mm
05013390001	1/4"	45	44	87	1 25/32"

817 R Bitholding screwdriver with Rapidaptor quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173-C 6.3 and E 6.3 hexagon insert bits and Wera Series 1 and 4

Drive: 2 position telescopic blade, can be retracted into the handle for confined space operation or extended for more reach, can also be removed and used as a 100mm bit holder in the power tool, 1/4" hexagon suitable for power tools with DIN ISO 1173-F 6.3 chuck

Design: 1/4" hexagon with Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology, magnetic

Handle: Kraftform with non-roll feature, multi-component

		 mm
05051482001	1/4"	133

817 R SB Bitholding screwdriver with Rapidaptor quick-release chuck




	
05073541001	4013288
1 x 1/4"x133	106025



Rapidaptor

Rapid-in und self-lock



The bit can be pushed into the adaptor without moving the sleeve. The lock is activated automatically as soon as the bit is applied to the screw. Bits are held securely and wobble-free.

Rapid-out



Simply push the sleeve forward to change the bit. The spring mechanism lifts the bit off the magnet and unlocks the tool. The bit can be easily removed. The rapid-out function makes it easy to remove even the smallest bits without extra tools.

Chuck-all



The Rapidaptor quick-release chucks hold 1/4" DIN ISO 1173 C 6,3 and E 6,3 as well as Wera series 1 and 4 bits.

Single-hand function



Every function of the Rapidator quick-release chuck, such as inserting or releasing bits, can be carried out with one hand. This is faster, more economical and more ergonomic. There are no unnecessary manoeuvres.



Bitholding Screwdrivers and Adaptors

Suitable for hand and power tool applications

820/1/6 Combination screwdriver with strong permanent magnet and bits



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 hexagon insert bits and Wera Series 1

Blade: Hexagon

Design: Strong permanent magnet

Handle: Kraftform, single-component, rotary magazine

05051620001	
●	819/1 Vario 1 x 1/4"x120
⊕	867/1 Z TORX® 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25

819/1/6 PH Combined Screwdriver with strong permanent magnet and bits



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 hexagon insert bits and Wera Series 1

Blade: Hexagon

Design: With strong permanent magnet

Handle: Kraftform, one component, rotary magazine

05346280001	
●	819/1 Vario 1 x 1/4"x120
⊕	851/1 Z PH 1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
●	800/1 Z 1 x 0,6x4,5x25; 1 x 1,0x5,5x25; 1 x 1,2x6,5x25

819/1/6 Combination screwdriver with strong permanent magnet and bits



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 hexagon insert bits and Wera Series 1

Blade: Hexagon

Design: Strong permanent magnet

Handle: Kraftform, single-component, rotary magazine

05051615001	
●	819/1 Vario 1 x 1/4"x120
⊕	851/1 Z PH 1 x PH 1x25; 1 x PH 2x25
⊕	855/1 Z PZ 1 x PZ 1x25; 1 x PZ 2x25
●	800/1 Z 1 x 0,8x5,5x25; 1 x 1,2x6,5x25

819/1 Combination screwdriver with strong permanent magnet, without bits



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 hexagon insert bits and Wera Series 1

Blade: Hexagon

Design: Strong permanent magnet

Handle: Kraftform, single-component, rotary magazine

	●	mm	mm	mm	mm
05051610001	1/4"	120	110	10,5	4 3/4"

392 Bitholding screwdriver with flexible shaft



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 hexagon bits and Wera Series 1

Design: Wera quick-release chuck

Handle: Kraftform with non-roll feature, multi-component

				
05028160001	1/4"	177	98	7"

813 Bitholding screwdriver



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 hexagon insert bits and Wera Series 1

Drive: 1/4" hexagon, magnetic

Handle: Kraftform with non-roll feature, multi-component

			
05051274001	1/4"	78	68

812/1 Bitholding screwdriver with strong permanent magnet



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 hexagon insert bits and Wera Series 1

Blade: Hexagon

Design: Strong permanent magnet, chrome-plated

Handle: Kraftform with non-roll feature, multi-component

					
05051205001	1/4"	120	112	10,5	4 3/4"

811/1 Stubby



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 hexagon insert bits and Wera Series 1

Blade: Round

Design: Extra short with strong permanent magnet

Handle: Kraftform, single-component

				
05051105001	1/4"	10	54	3/8"

810/1 Bitholding screwdriver with retaining ring



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 hexagon insert bits and Wera Series 1

Blade: Hexagon

Design: Retaining ring, chrome-plated

Handle: Kraftform with non-roll feature, multi-component

					
05051005001	1/4"	120	112	10,5	4 3/4"



Kraftform Kompakt Vario

With Ratchet Function

Kraftform Kompakt 60 RA



Pouch with 89 mm bits

17-piece set

1 hand-held bit holder 816 RA Kraftform with ratchet function, fine-tooth design for minimal return angle, switchover ring (right, locked, left), maximum torque of up to 50 Newton metres, $\frac{1}{4}$ " hexagon chuck with Rapidaptor technology i.e. rapid-in, rapid-out, rapid-spin, chuck-all and single-hand function for rapid bit change, magnetic and 16 bits of 89 mm in length suitable for holders as per DIN ISO 1173 F 6.3 or for direct insertion in a power tool

05051040001		
●	816 RA	1 x $\frac{1}{4}$ "x142,0
+	851/4 Z PH	1 x PH 1x89; 1 x PH 2x89; 1 x PH 3x89
+	855/4 Z PZ	1 x PZ 1x89; 1 x PZ 2x89; 1 x PZ 3x89
+	867/4 Z TORX® B0	1 x TX 10x89; 1 x TX 15x89; 1 x TX 20x89; 1 x TX 25x89; 1 x TX 30x89
●	800/4 Z	1 x 1,0x5,5x89
○	840/4 Z Hex-Plus	1 x 3,0x89; 1 x 4,0x89; 1 x 5,0x89; 1 x 6,0x89

Kraftform Kompakt 60 RA, imperial



Pouch with 89 mm bits

17-piece set

1 hand-held bit holder 816 RA Kraftform with ratchet function, fine-tooth design for minimal return angle, switchover ring (right, locked, left), maximum torque of up to 50 Newton metres, $\frac{1}{4}$ " hexagon chuck with Rapidaptor technology i.e. rapid-in, rapid-out, rapid-spin, chuck-all and single-hand function for rapid bit change, magnetic and 16 bits of 89 mm in length suitable for holders as per DIN ISO 1173 F 6.3 or for direct insertion in a power tool

05051041001		
●	816 RA	1 x $\frac{1}{4}$ "x142,0
+	851/4 Z PH	1 x PH 1x89; 1 x PH 2x89; 1 x PH 3x89
+	867/4 Z TORX® B0	1 x TX 10x89; 1 x TX 15x89; 1 x TX 20x89; 1 x TX 25x89; 1 x TX 30x89
●	800/4 Z	1 x 1,0x5,5x89
○	840/4 Z Hex-Plus	1 x $\frac{3}{32}$ "x89; 1 x $\frac{1}{8}$ "x89; 1 x $\frac{5}{32}$ "x89; 1 x $\frac{3}{16}$ "x89
○	868/4 Square-Plus	1 x # 1x89; 1 x # 2x89; 1 x # 3x89

816 RA Ratchet screwdriver



Application: Suitable for hexagon socket insert bits as per DIN ISO 1173 C 6.3 and E 6.3 and Wera series 1 and 4

Design: Ratchet, fine-tooth design for minimal return angle, switchover ring (right, locked, left), maximum torque of up to 50 Newton metres, $\frac{1}{4}$ " hexagon chuck with Rapidaptor technology i.e. rapid-in, rapid-out, rapid-spin, chuck-all and single-hand function for rapid bit change, magnetic

Handle: Kraftform with non-roll feature, multi-component

	mm	
05051461001	$\frac{1}{4}$ "	142,0

80 RA Vario ratchet screwdriver



Application: Suitable for 6 mm Wera Vario blades

Design: Ratchet, fine-tooth design for minimal return angle, switchover ring (right, locked, left), maximum torque of up to 50 Newton metres, 6 mm hexagon chuck

Handle: Kraftform with non-roll feature, multi-component

		
	mm	mm
05002901001	6	115,0

Kraftform Kompakt Vario RA SB



Pouch with 175 mm Wera Vario double-ended blades, 6 mm hexagon shaft
7-piece set

1 Kraftform Kompakt Vario RA hand-held bit holder with ratchet function, fine-tooth design for minimal return angle, switchover ring (right, fixed, left), maximum torque of up to 50 Newton meters, 6 mm hexagon chuck for Wera Vario double-ended blades, 6 Vario double-ended blades (= 12 different dimensions)

		
05073665001		
	80 RA	1 x 6x115,0
	85	1 x PH 1xPH 2x175
	86	1 x PZ 1xPZ 2x175
	87	1 x TX 10xTX 15x175; 1 x TX 20xTX 25x175
	81	1 x 0,6x4,0x1,0x6,0x175
	84	1 x 4x5x175

Tip

Fine-tooth design



Fine tooth system for precision work.

Reverse direction switch




Fine action 44 tooth system. Great time savings when screwdriving. Ergonomic design of the reverse direction switch.

Fine adjustment work



Additionally, the lockable neutral position permits exact adjustment work without having to change the screwdriving direction every time. Lockable neutral position for fine adjustment work.

Kraftform Kompakt Vario RA SB



The 6 mm double-ended blades of 175 mm length are out of high quality bit material which gives them a particularly long service life.

Kraftform Kompakt Vario

With Ratchet Function

Kraftform Kompakt Pistol RA



7-piece set

1 hand-held bit holder 814 RA Kraftform, integrated Magazine, with ratchet function, fine-tooth design for minimal return angle, switchover ring (right, locked, left), maximum torque of up to 50 Newton metres, $\frac{1}{4}$ " hexagon chuck with Rapidaptor technology i.e. rapid-in, rapid-out, rapid-spin, chuck-all and single-hand function for rapid bit change, magnetic and 6 bits of 25 mm in length suitable for holders as per DIN ISO 1173-D 6,3

Holster

05051030001	
	814 RA 1 x $\frac{1}{4}$ "
+	851/1 Z PH 1 x PH 1x25; 1 x PH 2x25
+	855/1 Z PZ 1 x PZ 1x25; 1 x PZ 2x25
+	867/1 TORX® 1 x TX 20x25; 1 x TX 25x25



Kraftform Kompakt 27 RA 1 SB



Application: Suitable for hexagon socket insert bits as per DIN ISO 1173-C 6,3 and Wera series 1

Design: Ratchet, fine-tooth design for minimal return angle, switchover ring (right, locked, left), maximum torque of up to 50 Newton metres, hexagon blade with $\frac{1}{4}$ " hexagon chuck, stainless steel sleeve, strong permanent magnet

Handle: Kraftform with non-roll feature, multi-component, integrated magazine

05073660001	
+	851/1 Z PH 1 x PH 1x25; 1 x PH 2x25
+	855/1 Z PZ 1 x PZ 1x25; 1 x PZ 2x25
+	800/1 Z 1 x 1,0x5,5x25; 1 x 1,2x6,5x25

Kraftform Kompakt 27 RA 2 SB



Application: Suitable for hexagon socket insert bits as per DIN ISO 1173-C 6,3 and Wera series 1

Design: Ratchet, fine tooth system for minimal return angle, switchover ring (clockwise, locked, anticlockwise), maximum torque of up to 50 Newton metres, hexagon blade with $\frac{1}{4}$ " hexagon chuck, stainless steel sleeve, strong permanent magnet

Handle: Kraftform with non-roll feature, multi-component, integrated magazine for 6 bits (25 mm)

05073661002	
+	851/1 Z PH 1 x PH 1x25; 1 x PH 2x25
+	800/1 Z 1 x 1,0x5,5x25; 1 x 1,2x6,5x25
+	868/1 Z 1 x # 1x25; 1 x # 2x25



Kraftform Kompakt Vario

Without Ratchet Function

88/1 Vario set



11-piece set, specifically for demanding workshop environments

05002990001		
●	80	1 x 6x98
⊕	85	1 x PH 1xPH 2x175
⊕	86	1 x PZ 1xPZ 2x175
⊕	87	1 x TX 10xTX 15x175; 1 x TX 20xTX 25x175; 1 x TX 30xTX 40x175
⊕	81	1 x 0,6x4,0x1,0x6,0x175; 1 x 0,8x5,0x1,2x7,0x175
○	84	1 x 4x4x175; 1 x 5x5x175; 1 x 6x6x175

80 Vario handle



Application: 6 mm Vario blades and adaptors

Handle: Kraftform with non-roll feature, multi-component, 10 mm bolster

	mm	mm	mm
05002900001	6	10	98

95 Vario T-handle



Application: 6 mm Vario blades and adaptors

Handle: T-handle, single-component

	mm	mm	mm	
05003265001	6	56	44	2 1/4"

830 Vario bit holder adaptor



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 hexagon insert bits and Wera Series 1

Blade: 6 mm hexagon, chrome-plated

Drive: Wera 1/4" quick-release chuck with strong permanent magnet

	mm	mm	mm	mm
05051835001	1/4"	6	165	6 9/16"

91 Vario extension



Application: Vario blades and adaptors

Blade: 6 mm hexagon, chrome-plated

Drive: 6 mm hexagon socket

	mm	mm	mm	mm
05003210001	6	6	175	7"

712 Vario socket adaptor



Application: Suitable for 1/4" square drive sockets

Blade: 6 mm hexagon, chrome-plated

Drive: 1/4" square head

				
	mm	mm	mm	mm
05040001001	1/4"	6	175	7"

81 Combination blade for slotted screws



Application: Slotted screws

Blade: 6 mm hexagon

Design: Chrome-plated, Black Point

						
	mm	mm	mm	mm	mm	mm
05002910001	0,6	4,0	1,0	6,0	6	175 7"
05002913001	0,8	5,0	1,2	7,0	6	175 7"

82 Combination blade for slotted/Phillips screws



Application: Slotted screws and Phillips screws

Blade: 6 mm hexagon

Design: Chrome-plated, Black Point

						
	mm	mm	mm	mm	mm	mm
05002920001	PH 1	0,6	4,0	6	175	7"
05002923001	PH 2	1,0	6,0	6	175	7"
05002926001	PH 3	1,2	7,0	6	175	7"

Tip




Black Point Tip



The Wera Black Point tip provides an exact fit with optimum corrosion protection.

High quality bit material



The 6 mm double-ended blades of 175 mm length are out of high quality bit material which gives them a particularly long service life.

Adaptor



1/4" hexagon and square drives as per DIN ISO 1173-C 6.3 and DIN 3120 can also be driven with the 6 mm handles by attaching an adaptor.



Kraftform Kompakt Vario

Without Ratchet Function

83 Combination blade for Phillips/Pozidriv screws



Application: Phillips screws and Pozidriv screws

Blade: 6 mm hexagon

Design: Chrome-plated, Black Point

					
			mm	mm	
05002930001	PH 1	PZ 1	6	175	7"
05002933001	PH 2	PZ 2	6	175	7"

86 Combination blade for Pozidriv screws



Application: Suitable for Pozidriv screws

Blade: 6 mm hexagon

Design: Chrome-plated, Black Point

					
			mm	mm	
05002960001	PZ 1	PZ 2	6	175	7"
05140310001	PZ 2	PZ 3	6	175	7"

84 Combination blade for hexagon socket screws



Application: Hexagon socket screws

Blade: 6 mm hexagon

Design: Chrome-plated, Black Point

					
			mm	mm	
05002936001	2,5	2,5	6	175	7"
05002938001	3	3	6	175	7"
05002940001	4	4	6	175	7"
05002943001	5	5	6	175	7"
05002948001	4	5	6	175	7"
05002946001	6	6	6	175	7"

87 Combination blade for TORX® screws



Application: TORX® socket screws

Blade: 6 mm hexagon

Design: Chrome-plated, Black Point

					
			mm	mm	
05002966001	TX 6	TX 8	6	175	7"
05002968001	TX 7	TX 9	6	175	7"
05002970001	TX 10	TX 15	6	175	7"
05002973001	TX 20	TX 25	6	175	7"
05002976001	TX 30	TX 40	6	175	7"

85 Combination blade for Phillips screws



Application: Phillips screws

Blade: 6 mm hexagon

Design: Chrome-plated, Black Point

					
			mm	mm	
05002950001	PH 1	PH 2	6	175	7"

68 Combination blade for square socket screws



Application: For square socket screws

Blade: 6 mm hexagon

Design: Mat nickel, Black Point

					
			mm	mm	
05002980001	#1	#2	6	175	7"



044 377-0

Unt. Bwg 20.9.72





Products for Power Tool Use



Bits

256



Holders and Adaptors

354



Sets

380





Wet

Bits

	Bits for Phillips Screws	266		Bits for Multi-Point Screws	344
	Bits for Pozidriv Screws	288		Bits for Hi-TORQUE Screws	345
	Bits for PlusMinus Screws – Slotted/Phillips	300		Bits for Microstix Screws	346
	Bits for PlusMinus Screws – Slotted/Pozidriv	301		Bits for Five Lobe Screws	347
	Bits for TORX® Screws	302		Bits for Five Lobe Screws with Safety Pin	348
	Bits for TORX® BO Screws	316		Bits for Spanner Screws	350
	Bits for TORX PLUS® Screws	318		Nutsetters	351
	Bits for TORX PLUS® IPR Screws	322		Internal Thread Insertion Tool	353
	Bits for ASSY® Screws	323			
	Bits for Slotted Screws, Guide Sleeves	324			
	Bits for Hexagon Socket Screws	328			
	Bits for Hexagon Socket BO Screws	335			
	Bits for Square Socket Screws	336			
	Bits for TORQ-SET® Screws	340			
	Bits for TRI-WING®-Screws	343			



Bits

The right bit for every screw and for every power tool connection. The right quality for every user.

Thanks to the high-precision profile design and the outstanding concentricity properties, Wera bits provide for dependable working and offer great durability. Wera bits are designed for professional applications in industry as well as in the trade.

They enable higher torque transfer and typically have a long service life. Material and manufacturing expertise, established over decades, combined with sophisticated hardening technologies form the foundation upon which our premium quality is based.



Impaktor-Bits

Impact bits are needed when a strong power tool is used. Impact bits were specifically developed to withstand high power tool forces.



Stainless Steel-Bits

Wera stainless steel bits are manufactured out of stainless steel so unsightly rust can be avoided. The stainless steel bits from Wera are vacuum ice-hardened and have the hardness and strength needed for screw connections. There are no limitations to the industrial applications they are suitable for.



BiTorsion-Bits

BiTorsion bits are absolutely premium products. They have a softer BiTorsion zone which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits.



Bits with diamond coating

The diamond coating of the DC bits lowers the danger of slipping as the minute diamond particles literally “bite” themselves into the screw head.



“Take it easy”

“Take it easy” tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.

Impaktor Bits

We were not too happy that disintegrating bits flew around users faces as screwdriving with power tools took place with ever-higher power outputs.

We scrutinised the geometry and material properties of the bits for every screw profile. We analysed the destroyed bits, holders and screws in detail. The result is the Impaktor system – our entire know-how from bit manufacturing combined in our very best bit series.




For use with impact screwdrivers. Improve productivity when screwdriving with power tools.



Maximum utilisation of the material properties, a very special geometry – designed particularly to meet the extreme demands – as well as a specific manufacturing process mean that Wera Impaktor tools have an above-average service life.



Particularly high strength. Reduce the danger of premature bit breakage.

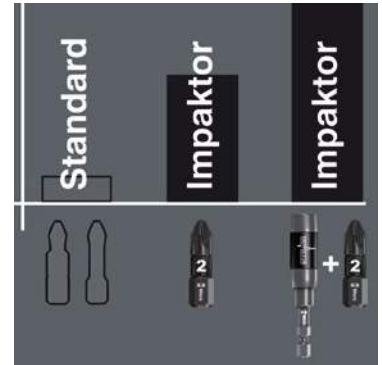

Torsion zone specially designed to absorb such forces and thereby protect the bit tip.



Another product advantage is the coating of the Impaktor bits with minute diamond particles.



These diamond particles reduce the cam-out effects – particularly high in power tool applications – which can lead to a slipping out of the screw head. The diamond particles literally bite themselves into the screw recess. This means that less contact pressure is required, something that greatly delays fatigue setting-in in power tool screwdriving jobs.



Wera's Impaktor system consisting of Impaktor bits and Impaktor holders is today's necessary addition to the BiTorsion system with the creation of the TriTorsion system.



The combination of the double torsion zones in the Impaktor holder and the torsion zone in the Impaktor bit result in the so-called TriTorsion system.


BiTorsion Bits

Peak forces that occur in power tool applications often result in premature wear of bits or damage to the screw head. This usually occurs during initial power-up and the when the screw comes to a standstill.

Screwdriving could become more productive and safer if these peak loads could be minimised. The Wera BiTorsion system prevents premature wear. The service life of the tool is extended and the productivity of power tool applications significantly increased.




The optimally coordinated features of the torsion zones on the bit and holder permit a phased yield when under strain. The two-phase system prevents premature wear. Moreover, a long tool service life is also ensured by the hardness of the bits that matches the respective application.

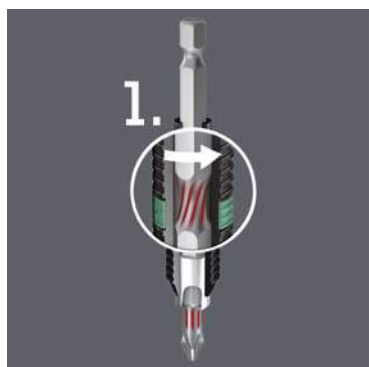

Any overloading of this spring is effectively prevented by means of a supporting mechanism. Higher peak loads are minimised through the torsion effect of the bit shaft (Phase 2). This effect is achieved with a specific heat treatment after the hardening process of the bits. This reduces the hardness of the shaft in comparison to the drive tip.



The BiTorsion holder and the BiTorsion bit can, of course, be used independently of one another.

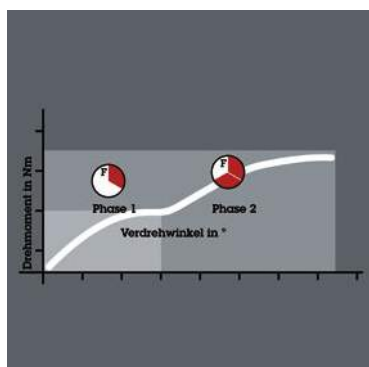

Even the service life of conventional bits is enhanced with the use of the BiTorsion holder and the BiTorsion bit also functions in a normal holder.



The effectiveness of the BiTorsion system comes from a combination of two shock-absorbing spring elements. Both bits as well as holders have a cushioning torsion zone that diverts the kinetic energy away from the drive tip during peak loads.



The optimally coordinated features of the torsion zones on the bit and holder permit a phased yield when under strain. The two-phase system prevents premature wear. Moreover, a long tool service life is also ensured by the hardness of the bits that matches the respective application.



Diamond-coated Bits

One of the greatest problems with power tool applications is that the conventional bit easily slips out of the head of the screw (cam-out). This often destroys both the head of the screw and the tool.

High resulting costs are incurred e.g. from damaged surfaces and screw connections that can no longer be loosened.

Screwdriving will become safer and more economic if this problem of slipping can be minimised.



To solve this fundamental problem, Wera launched a diamond-coated bit on to the market in 1992.



Today, the Wera diamond bit – manufactured with the technology specifically developed by Wera for this application – still sets the standard in terms of resilience and functionality. Wera bits with a diamond coating ensure a secure fit of the bit in the screw head.




Particularly when applications involve sensitive materials or high quality surfaces are involved, bits with a diamond coating ensure that work is done safer, faster and at lower cost.



The minute diamond particles applied to the tip of the tool literally “bite” into the screw and ensure an exact, anti-slip fit in the head of the screw. This secure fit protects the screw. The cam-out forces which compel the user to apply greater pressure to the screw are considerably reduced.





Bits for Phillips Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

851/1 IMP DC Impaktor bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: The Impaktor technology ensures an above-average service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance. Take it easy toolfinder: Output colour coding (red = Phillips) and large stamp to enable the desired bit to be easily located.

		mm	
05057615001	PH 1	25	1"
05057616001	PH 2	25	1"
05057617001	PH 3	25	1"

851/1 IMP DC SB Impaktor bits

		mm	
05073916001	+	1 x PH 2x25	158369
05073917001	+	1 x PH 3x25	158376



3851/1 TS bits, stainless



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Stainless steel for minimising rust, special torsion-style design to reduce premature wear. Take it easy toolfinder: Output colour coding (red = Phillips) and large stamp to enable the desired bit to be easily located.

		mm	
05071010001	PH 1	25	1"
05071011001	PH 2	25	1"
05071012001	PH 3	25	1"

3851/1 TS SB bits, stainless

		mm	
05073610001	+	1 x PH 1x25	112132
05073611001	+	1 x PH 2x25	112149
05073612001	+	1 x PH 3x25	112156



851/1 BDC bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6,3 bit holders

Design: BiTorsion for long service life, diamond-coated for secure screw fit. Take it easy toolfinder: Output colour coding (red = Phillips) and large stamp to enable the desired bit to be easily located.

	+	mm	"
05056400001	PH 1	25	1"
05056402001	PH 2	25	1"
05056404001	PH 3	25	1"

851/1 BDC SB bits

		4013288
05073332001	1 x PH 1x25	029324
05073333001	1 x PH 2x25	029331
05073334001	1 x PH 3x25	029348
05073335001	2 x PH 2x25	029355



Tip



Impaktor-Bits



Impact-Bits are needed when a strong power tool (e.g. 18 volt impact screwdriver) is used. Impact bits were specifically developed to withstand high power tool forces.



Stainless Steel Bits



Wera stainless steel bits are manufactured out of stainless steel so unsightly rust can be avoided. The stainless steel bits from Wera are vacuum ice-hardened and have the hardness and strength needed for screw connections. There are no limitations to the industrial applications they are suitable for.




"Take it easy"



"Take it easy" tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.





Bits for Phillips Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

851/1 BTH bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: BiTorsion for long service life, extra-hard. Take it easy toolfinder: Output colour coding (red = Phillips) and large stamp to enable the desired bit to be easily located.

		mm	
05056410001	PH 1	25	1"
05056412001	PH 2	25	1"
05056414001	PH 3	25	1"

851/1 ADC bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Diamond-coated for secure screw fit, profiled version

		mm		mm
05134940001	PH 1	25	1"	4,5
05134941001	PH 2	25	1"	6,0
05134942001	PH 3	25	1"	-

851/1 A bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Extra-hard, profiled version

		mm		mm
05134919001	PH 1	25	1"	4,5
05134920001	PH 2	25	1"	6,0
05134921001	PH 3	25	1"	-

851/1 BTZ bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: BiTorsion for long service life, extra-tough, for universal use. Take it easy toolfinder: Output colour coding (red = Phillips) and large stamp to enable the desired bit to be easily located.

		mm	
05056420001	PH 1	25	1"
05056422001	PH 2	25	1"
05056424001	PH 3	25	1"

851/1 AH bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Industrial version for optimum torque transfer with increased depth of penetration into the screw recess, 1/4" hexagon over the entire bit length, extra-hard, profiled version

		mm	"
05380155001	PH 1	25	1"
05380156001	PH 2	25	1"
05380157001	PH 3	25	1"

851/1 RDC bits



Application: Drywall screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Reduced shaft diameter, diamond-coated for secure screw fit

		mm	"	mm
05135008001	PH 2	25	1"	4,2

851/1 RH bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Reduced shaft diameter, extra-hard, profiled version

		mm	"	mm
05380158001	PH 1	25	1"	4,2
05346281001	PH 2	25	1"	4,2

Tip

A-Bits



A stands for aviation. A bits are particularly hard bits with a sharp-edged profile which e.g. penetrates screw profiles full of paint (such as on fuselage panels) ensuring a dependable transfer of force between the bit and the screw.



Bits with diamond coating



The diamond coating of the DC bits lowers the danger of slipping as the minute diamond particles literally "bite" themselves into the screw head.



BTH-Bits



BTH-Bits have an additional tempered BiTorsion zone, which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits.



"Take it easy"



"Take it easy" tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.



851/1 RZ bits



Application: Drywall screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Reduced shaft diameter, tough, for universal use

		 mm	 mm	 mm
05135009001	PH 2	25	1"	4,2

851/1 RZ SB bits

		 4013288
05135005001	 2 x PH 2x25	038456




Tip

Bits with reduced shaft diameter



Bits with reduced shaft diameter ensure that screws can be sunk without damaging the surface. This is particularly necessary in drywall construction applications.





Bits for Phillips Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

851/1 TH bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Torsion-style design to reduce premature wear, extra-hard

		mm	"
05056605001	PH 1	25	1"
05056610001	PH 2	25	1"
05056625001	PH 3	25	1"

851/1 TiN bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: TiN coating for the hardness needed e.g. in series screwdriving operations

		mm	"
05480171001	PH 1	25	1"
05480172001	PH 2	25	1"
05480173001	PH 3	25	1"

851/1 TiN SB bits

		4013288
05073512001	2 x PH 1x25	105806
05073513001	2 x PH 2x25	106513
05073514001	2 x PH 3x25	105820
05073515001	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25	105837



851/1 TZ bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Torsion-style design to reduce premature wear, tough, for universal use

		 mm	
05056505001	PH 1	25	1"
05056510001	PH 2	25	1"
05056525001	PH 3	25	1"

851/1 TZ SB bits

			4013288
05073323001		2 x PH 1x25	029249
05073324001		2 x PH 2x25	029256
05073325001		2 x PH 3x25	029263
05073326001		1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25	029270



853/1 TZ bits, ACR®



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Torsion-style design to reduce premature wear, tough, for universal use, ACR® (Anti Cam-Out Ribs) prevents bits from slipping out of screw head

		 mm	
05056660001	PH 1	25	1"
05056662001	PH 2	25	1"
05056664001	PH 3	25	1"

Tip

ACR®-Bits



ACR® stands for "anti-cam-out ribs". ACR® bits have ribs at the drive tip that protect against slipping out of the screw head. It is recommended that ACR® bits are matched with ribbed ACR® screws for maximum effect. ACR® is a registered trademark of Phillips Screw Company.

TiN-Bits



TiN stands for titanium-nitride. An extremely hard coating to withstand permanent loads such as during continual screwdriving operations in series manufacturing.



TH-Bits




TH-Bits are hard bits with a torsion zone. Torsion bits absorb the damaging peak torque loads in the torsion zone. This prevents premature wear and enhances the service life of the bits.



TZ-Bits



TZ-Bits are tough bits with a torsion zone. Torsion bits absorb the damaging peak torque loads in the torsion zone. This prevents premature wear and enhances the service life of the bits.



Bits for Phillips Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

851/1 Z bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Tough, for universal use

		mm	
05056500001	PH 0	25	1"
05072070001	PH 1	25	1"
05056507001	PH 1	50	2"
05072072001	PH 2	25	1"
05056515001	PH 2	32	1 1/4"
05056520001	PH 2	50	2"
05072074001	PH 3	25	1"
05134905001	PH 3	50	2"
05056535001	PH 4	32	1 1/4"

851/1 Z SB bits

		4013288
05073304001	2 x PH 1x25	029058
05073305001	2 x PH 2x25	029065
05073306001	2 x PH 3x25	029072
05073307001	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25	029089



851/1 Z DIY bits

		4013288
05072400001	10 x PH 1x25	115737
05072401001	10 x PH 2x25	115744
05072402001	10 x PH 3x25	115751



851/1 Z DIY 100 bits

		4013288
05072440001	100 x PH 1x25	138460
05072441001	100 x PH 2x25	138477



851/1 J bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Tough, for universal use; PH 0: JCIS (Japanese Camera Industrial Standard)

		 mm	 "	 mm
05135040001	PH 00	25	1"	2,0
05135041001	PH 0	25	1"	2,5
05135042001	PH 1	25	1"	3,0


Tip

J-Bits



J stands for Japan. J bits have been optimised to suit Asian PH screws. In particular, they are for use with very small dimensions as set out in the Japanese Camera Standard.





Bits for Phillips Screws



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

851/4 IMP DC Impaktor bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: The Impaktor technology ensures an above-average service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance. Take it easy toolfinder: Output colour coding (red = Phillips) and large stamp to enable the desired bit to be easily located.

		mm	"
05057656001	PH 2	50	2"
05057657001	PH 3	50	2"

851/4 IMP DC SB Impaktor bits

			4013288
05073956001	+	1 x PH 2x50	158482
05073957001	+	1 x PH 3x50	158499



3851/4 Bits, stainless



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Stainless steel for minimising rust

		mm	"
05071081001	PH 1	89	3 1/2"
05071082001	PH 2	89	3 1/2"
05071083001	PH 3	89	3 1/2"

851/4 BDC bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: BiTorsion for long service life, diamond-coated for secure screw fit. Take it easy toolfinder: Output colour coding (red = Phillips) and large stamp to enable the desired bit to be easily located.

		mm	"
05059530001	PH 1	50	2"
05059532001	PH 2	50	2"
05059534001	PH 3	50	2"

851/4 BTH bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: BiTorsion for long service life, extra-hard. Take it easy toolfinder: Output colour coding (red = Phillips) and large stamp to enable the desired bit to be easily located.

	+	mm	"
05059540001	PH 1	50	2"
05059542001	PH 2	50	2"
05059544001	PH 3	50	2"

851/4 BTZ bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: BiTorsion for long service life, extra-tough, for universal use. Take it easy toolfinder: Output colour coding (red = Phillips) and large stamp to enable the desired bit to be easily located.

	+	mm	"
05059550001	PH 1	50	2"
05059552001	PH 2	50	2"
05059554001	PH 3	50	2"

Tip



Impaktor-Bits



Impact-Bits are needed when a strong power tool (e.g. 18 volt impact screwdriver) is used. Impact bits were specifically developed to withstand high power tool forces.



BDC-Bits



BDC-Bits are absolutely premium products. They have a softer BiTorsion zone which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits.

The diamond coating lowers the danger of slipping as the minute diamond particles literally "bite" themselves into the screw head. B stands for BiTorsion. DC stands for diamond coated.




"Take it easy"



"Take it easy" tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.





Bits for Phillips Screws



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

851/4 ADC bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Extra-hard, diamond-coated for secure screw fit, profiled version

		 mm	 mm	 mm
05134950001	PH 1	50	2"	4,5
05134951001	PH 2	50	2"	6
05134952001	PH 3	50	2"	-

851/4 RH Reduced tip bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Reduced shaft diameter, extra-hard

		 mm	 mm	 mm
05380160001	PH 1	50	2"	4,2
05380161001	PH 2	50	2"	4,2

851/4 A bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Extra-hard, profiled version

		 mm	 mm	 mm
05134929001	PH 0	50	2"	3
05134906001	PH 0	70	2 3/4"	3
05134907001	PH 0	89	3 1/2"	3
05134908001	PH 0	152	6"	3
05134930001	PH 1	50	2"	4,5
05134370001	PH 1	70	2 3/4"	4,5
05134372001	PH 1	89	3 1/2"	4,5
05134909001	PH 1	152	6"	4,5
05134931001	PH 2	50	2"	6
05134371001	PH 2	70	2 3/4"	6
05134373001	PH 2	89	3 1/2"	6
05134910001 ¹⁾	PH 2	152	6"	6
05134911001 ²⁾	PH 2	152	6"	6
05134932001	PH 3	50	2"	-
05134912001	PH 3	50	2"	8
05134913001	PH 3	70	2 3/4"	8
05134914001	PH 3	89	3 1/2"	8
05134915001	PH 3	152	6"	8
05160983001	PH 4	50	2"	10

¹⁾ Length of drive 100 mm

²⁾ Length of drive 20 mm

851/4 R Reduced tip bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Reduced shaft diameter, tough, ideal for difficult access screwdriving jobs e.g. in sheet steel or metal

		 mm	 "	 mm
05160899001	PH 2	50	2"	3,0
05160896001	PH 2	152	6"	3,0

851/4 TH bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Torsion-style design to reduce premature wear, extra-hard

		 mm	 "
05059855001	PH 1	50	2"
05059860001	PH 2	50	2"
05059865001	PH 3	50	2"

Tip

Bits with reduced shaft diameter



Bits with reduced shaft diameter ensure that screws can be sunk without damaging the surface. This is particularly necessary in drywall construction applications.

A-Bits




A stands for aviation. A bits are particularly hard bits with a sharp-edged profile which e.g. penetrates screw profiles full of paint (such as on fuselage panels) ensuring a dependable transfer of force between the bit and the screw.



Bits with diamond coating



The diamond coating of the DC bits lowers the danger of slipping as the minute diamond particles literally "bite" themselves into the screw head.





Bits for Phillips Screws



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

851/4 TZ bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Torsion-style design to reduce premature wear, tough, for universal use

		mm	
05059805001	PH 1	50	2"
05059810001	PH 2	50	2"
05059815001	PH 3	50	2"

851/4 TZ SB bits

			4013288
05134380001	2 x PH 1x50	037947	
05134381001	2 x PH 2x50	037954	
05134382001	2 x PH 3x50	037961	



851/4 J bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Tough, for universal use

		mm		mm
05135530001	PH 00	50	2"	2,0
05380200001	PH 00	89	3 1/2"	2,0
05135531001 ¹⁾	PH 0	50	2"	2,5
05380201001 ¹⁾	PH 0	89	3 1/2"	2,5
05135532001	PH 1	50	2"	4,5
05380202001	PH 1	89	3 1/2"	4,5

¹⁾ Size 0 modified according to JCS 0 (Japanese Camera Industrial Standard)

851/4 Z bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Tough, for universal use

		mm		mm
05059755001	PH 1	70	2 3/4"	4,5
05059760001	PH 1	89	3 1/2"	4,5
05059765001	PH 1	127	5"	4,5
05059766001	PH 1	152	6"	4,5
05059770001	PH 2	70	2 3/4"	6,0
05059775001	PH 2	89	3 1/2"	6,0
05059780001	PH 2	110	4 3/8"	6,0
05059785001	PH 2	127	5"	6,0
05059786001	PH 2	152	6"	6,0
05059790001	PH 3	70	2 3/4"	-
05059795001	PH 3	89	3 1/2"	-
05059800001	PH 3	110	4 3/8"	-
05059802001	PH 3	152	6"	-

851/4 Z SB bits

			4013288
05073520001	1 x PH 1x89	105875	
05073521001	1 x PH 2x89	105882	
05073522001	1 x PH 3x89	105899	



Tip

ACR®-Bits:



ACR® stands for "anti-cam-out ribs". ACR® bits have ribs at the drive tip that protect against slipping out of the screw head. It is recommended that ACR® bits are matched with ribbed ACR® screws for maximum effect. ACR® reg. trademark of Phillips Screw Company.

853/4 ACR® bits



Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Tough, for universal use, ACR® (Anti Cam-Out Ribs) prevents bit from slipping out of screw head

	⊕	mm	mm	mm
05346285001	PH 1	50	2"	3,5
05346286001	PH 2	50	2"	5,2
05346287001	PH 3	50	2"	5,8

853/4 Harpoon ACR® bits




Application: Phillips screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Reduced shaft diameter, tough, for universal use, ACR® (Anti Cam-Out Ribs) prevents bit from slipping out of screw head

	⊕	mm	mm	mm
05160901001	PH 2	50	2"	3,3
05160895001	PH 2	70	2 3/4"	3,3
05160908001	PH 2	152	6"	3,3





Bits for Phillips Screws



Double-ended bits, 1/4" hexagon drive (series 23)

851/23 double-ended bits for Phillips screws



Application: Phillips screws

Drive: 1/4" hexagon

Design: Ball-guide groove 17 mm

		mm	
05135705001	PH 2	45	1 25/32"
05135706001	PH 2	65	2 9/16"



5/16" hexagon drive, suitable for D 8 bit holders or direct drive (series 2)

851/2 Z bits



Application: Phillips screws

Drive: 5/16" hexagon, suitable for DIN ISO 1173-D 8 bit holders

Design: Tough, for universal use

		mm		mm
05057705001	PH 1	32	1 1/4"	4,5
05057710001	PH 2	32	1 1/4"	6,0
05057715001	PH 3	32	1 1/4"	7,6
05057720001	PH 4	32	1 1/4"	-
05057725001	PH 4	38	1 1/2"	10,0

M 4 Thread drive M 4 direct drive (series 11)

851/11 Bits



Application: Phillips screws

Drive: Thread drive M 4

Design: Tough, for universal use

		 mm	 mm	 mm
05065075001	PH 1	33	1 1/4"	5,5
05065081001	PH 2	33	1 1/4"	6,0

M 5 Thread drive M 5 direct drive (series 12)

851/12 Bits





Application: Phillips screws

Drive: Thread drive M 5

Design: Tough, for universal use

		 mm	 mm	 mm
05065110001	PH 2	33	1 1/4"	7,0
05065112001	PH 2	35	1 3/8"	7,0
05065114001	PH 2	44,5	1 3/4"	6,0
05065116001	PH 2	50	2"	6,0





Bits for Phillips Screws



M 6 Thread drive M 6 direct drive (series 15)

851/15 Bits



Application: Phillips screws

Drive: Thread drive M 6

Design: Tough, for universal use

		 mm	 mm	 mm
05065150001	PH 2	33	1 1/4"	8,0
05065152001	PH 2	35	1 3/8"	8,0
05065154001	PH 2	44,5	1 3/4"	8,0



#10/32" Thread drive #10-32 UNF direct drive (series 16)

851/16 Bits



Application: Phillips screws

Drive: Thread drive #10-32 UNF

Design: Tough, for universal use

		 mm	 mm	 mm
05065197001	PH 2	44,5	1 3/4"	6,0



4 mm 4 mm Halfmoon direct drive (series 9)

851/9 C J PH bits, halfmoon



Application: Phillips screws

Drive: Halfmoon, 4 mm

Design: Hard

		mm	"	mm	mm	"
05135270001	PH 00	44	1 ⁴⁷ / ₆₄	1,8	20	²⁵ / ₃₂
05135271001	PH 00	64	2 ³³ / ₆₄	1,8	20	²⁵ / ₃₂
05135272001 ¹⁾	PH 0	44	1 ⁴⁷ / ₆₄	1,8	20	²⁵ / ₃₂
05135273001 ¹⁾	PH 0	64	2 ³³ / ₆₄	1,8	20	²⁵ / ₃₂
05135274001 ¹⁾	PH 0	44	1 ⁴⁷ / ₆₄	2,0	20	²⁵ / ₃₂
05135275001 ¹⁾	PH 0	64	2 ³³ / ₆₄	2,2	20	²⁵ / ₃₂
05135278001 ¹⁾	PH 0	44	1 ⁴⁷ / ₆₄	2,2	20	²⁵ / ₃₂
05135276001	PH 1	44	1 ⁴⁷ / ₆₄	3,0	20	²⁵ / ₃₂
05135277001	PH 1	64	2 ³³ / ₆₄	3,0	20	²⁵ / ₃₂

¹⁾ Size 0 modified according to JCIS 0 (Japanese Camera Industrial Standard)



4 mm 4 mm HIOS direct drive (series 21)

851/21 J bits



Application: Phillips screws


Drive: HIOS 4 mm

Design: Hard

		mm	"	mm
05135280001	PH 00	40	1 ⁹ / ₁₆	1,8
05135281001	PH 00	60	2 ³ / ₈	1,8
05135284001 ¹⁾	PH 0	40	1 ⁹ / ₁₆	1,8
05135285001 ¹⁾	PH 0	60	2 ³ / ₈	1,8
05135286001 ¹⁾	PH 0	40	1 ⁹ / ₁₆	2,0
05135287001 ¹⁾	PH 0	60	2 ³ / ₈	2,0
05135288001 ¹⁾	PH 0	40	1 ⁹ / ₁₆	2,5
05135289001 ¹⁾	PH 0	60	2 ³ / ₈	2,5
05135290001	PH 1	40	1 ⁹ / ₁₆	3,0
05135291001	PH 1	60	2 ³ / ₈	3,0

¹⁾ Size 0 modified according to JCIS 0 (Japanese Camera Industrial Standard)






Bits for Phillips Screws



5 mm 5 mm HIOS direct drive (series 22)

851/22 J bits



Application: Phillips screws

Drive: HIOS 5 mm

Design: Hard; PH 0: JCIS (Japanese Camera Industrial Standard)

		mm		mm	mm	
05135380001	PH 00	60	2 ³ / ₈ "	2,0	20	²⁵ / ₃₂ "
05135381001 ¹⁾	PH 0	60	2 ³ / ₈ "	2,0	20	²⁵ / ₃₂ "
05135382001 ¹⁾	PH 0	80	3 ¹ / ₈ "	2,0	20	²⁵ / ₃₂ "
05135383001 ¹⁾	PH 0	60	2 ³ / ₈ "	2,5	20	²⁵ / ₃₂ "
05135384001 ¹⁾	PH 0	80	3 ¹ / ₈ "	2,5	20	²⁵ / ₃₂ "
05135385001	PH 1	60	2 ³ / ₈ "	3,0	20	²⁵ / ₃₂ "
05135386001	PH 1	80	3 ¹ / ₈ "	3,0	20	²⁵ / ₃₂ "
05135387001	PH 1	100	4"	3,0	20	²⁵ / ₃₂ "

¹⁾ Size 0 modified according to JCIS 0 (Japanese Camera Industrial Standard)



⁵/₁₆ "

5/16" external square drive (series 25)

851/25 H bits




Application: Phillips screws

Drive: ⁵/₁₆ " external square

Design: Extra-hard

		mm	
05380380001	PH 1	29	1 ³ / ₁₆ "
05380381001	PH 2	29	1 ³ / ₁₆ "
05380382001	PH 3	29	1 ³ / ₁₆ "
05380383001	PH 4	29	1 ³ / ₁₆ "





Bits for Pozidriv Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

855/1 IMP DC Impaktor bits



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: The Impaktor technology ensures an above-average service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance. Take it easy toolfinder: Output colour coding (black = Pozidriv) and large stamp to enable the desired bit to be easily located.


		mm	"
05057620001	PZ 1	25	1"
05057621001	PZ 2	25	1"
05057622001	PZ 3	25	1"

855/1 IMP DC SB Impaktor bits

		4013288
05073921001	1 x PZ 2x25	158383
05073922001	1 x PZ 3x25	158390



3855/1 TS bits, stainless



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Stainless steel for minimising rust, special torsion-style design to reduce premature wear. Take it easy toolfinder: Output colour coding (black = Pozidriv) and large stamp to enable the desired bit to be easily located.

		mm	"
05071020001	PZ 1	25	1"
05071021001	PZ 2	25	1"
05071022001	PZ 3	25	1"

3855/1 TS SB bits, stainless

		4013288
05073613001	1 x PZ 1x25	112101
05073614001	1 x PZ 2x25	112118
05073615001	1 x PZ 3x25	112125



855/1 BDC bits



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: BiTorsion for long service life, diamond-coated for secure screw fit. Take it easy toolfinder: Output colour coding (black = Pozidriv) and large stamp to enable the desired bit to be easily located.

05056700001	PZ 1	25	1"
05056702001	PZ 2	25	1"
05056704001	PZ 3	25	1"

855/1 BDC SB bits

05073336001	1 x PZ 1x25	029362
05073337001	1 x PZ 2x25	029379
05073338001	1 x PZ 3x25	029386
05073339001	2 x PZ 2x25	029393



Tip



Impaktor-Bits



Impact-Bits are needed when a strong power tool (e.g. 18 volt impact screwdriver) is used. Impact bits were specifically developed to withstand high power tool forces.



BDC-Bits



BDC-Bits are absolutely premium products. They have a softer BiTorsion zone which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits. The diamond coating lowers the danger of slipping as the minute diamond particles literally “bite” themselves into the screw head. B stands for BiTorsion. DC stands for diamond coated.




“Take it easy”



“Take it easy” tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.





Bits for Pozidriv Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

855/1 BTH bits



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: BiTorsion for long service life, extra-hard. Take it easy toolfinder: Output colour coding (black = Pozidriv) and large stamp to enable the desired bit to be easily located.

		mm	"
05056710001	PZ 1	25	1"
05056712001	PZ 2	25	1"
05056714001	PZ 3	25	1"

855/1 BTZ bits



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: BiTorsion for long service life, extra-tough, for universal use. Take it easy toolfinder: Output colour coding (black = Pozidriv) and large stamp to enable the desired bit to be easily located.

		mm	"
05056720001	PZ 1	25	1"
05056722001	PZ 2	25	1"
05056724001	PZ 3	25	1"

855/1 RZ bits



Application: Quick-build Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Reduced shaft diameter, tough, for universal use

		mm	"	mm
05135017001	PZ 1	25	1"	4,2
05135003001	PZ 2	25	1"	4,2

855/1 TH bits



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Torsion-style design to reduce premature wear, extra-hard

		mm	"
05056910001	PZ 1	25	1"
05056915001	PZ 2	25	1"
05056925001	PZ 3	25	1"

855/1 TH SB bits

			4013288
05073370001	2 x PZ 1x25	029638	
05073371001	2 x PZ 2x25	029645	
05073372001	2 x PZ 3x25	029652	
05073373001	1 x PZ 1x25; 1 x PZ 2x25; 1 x PZ 3x25	029669	



855/1 TiN bits



Application: Suitable for Pozidriv screws



Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: TiN coating for the hardness needed e.g. in series screwdriving operations

			
		mm	"
05480221001	PZ 1	25	1"
05480222001	PZ 2	25	1"
05480223001	PZ 3	25	1"

855/1 TiN SB bits

		
05073516001	2 x PZ 1x25	4013288 106445
05073517001	2 x PZ 2x25	105844
05073518001	2 x PZ 3x25	105851
05073519001	1 x PZ 1x25; 1 x PZ 2x25; 1 x PZ 3x25	105868



Tip

Bits with reduced shaft diameter



Bits with reduced shaft diameter ensure that screws can be sunk without damaging the surface. This is particularly necessary in drywall construction applications.

TiN-Bits



TiN stands for titanium-nitride. An extremely hard coating to withstand permanent loads such as during continual screwdriving operations in series manufacturing.




BTH- and BTZ-Bits



BTH- and BTZ-Bits have an additional tempered BiTorsion zone, which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits.





Bits for Pozidriv Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

855/1 TZ bits



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Torsion-style design to reduce premature wear, tough, for universal use

		 mm	
05056810001	PZ 1	25	1"
05056815001	PZ 2	25	1"
05056825001	PZ 3	25	1"

855/1 Z bits



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Tough, for universal use

		 mm	
05056805001	PZ 0	25	1"
05072080001	PZ 1	25	1"
05056812001	PZ 1	50	2"
05072082001	PZ 2	25	1"
05056820001	PZ 2	50	2"
05072084001	PZ 3	25	1"
05056835001	PZ 4	32	1 1/4"

856/1 TZ, ACR® bits



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Torsion-style design to reduce premature wear, tough, for universal use, ACR® (Anti Cam-Out Ribs) prevents bits from slipping out of screw head

		 mm	
05056937001	PZ 1	25	1"
05056938001	PZ 2	25	1"
05056939001	PZ 3	25	1"

855/1 Z SB bits



		4013288
05073308001	2 x PZ 1x25	029096
05073309001	2 x PZ 2x25	029102
05073310001	2 x PZ 3x25	029119
05073380001	1 x PZ 4x32	029621
05073311001	1 x PZ 1x25; 1 x PZ 2x25; 1 x PZ 3x25	029126



855/1 Z DIY bits

			4013288
05072403001	10 x PZ 1x25	115768	
05072404001	10 x PZ 2x25	115775	
05072405001	10 x PZ 3x25	115782	



855/1 Z DIY 100 bits

			4013288
05072443001	100 x PZ 1x25	138484	
05072444001	100 x PZ 2x25	138491	



Tip

ACR®-Bits:




ACR® stands for “anti-cam-out ribs”. ACR® bits have ribs at the drive tip that protect against slipping out of the screw head. It is recommended that ACR® bits are matched with ribbed ACR® screws for maximum effect. ACR® reg. trademark of Phillips Screw Company.

TZ-Bits



TZ-Bits are tough bits with a torsion zone. Torsion bits absorb the damaging peak torque loads in the torsion zone. This prevents premature wear and enhances the service life of the bits.





Bits for Pozidriv Screws



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

855/4 IMP DC Impaktor bits



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: The Impaktor technology ensures an above-average service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance. Take it easy toolfinder: Output colour coding (black = Pozidriv) and large stamp to enable the desired bit to be easily located.

		 mm	 mm
05057661001	PZ 2	50	2"
05057662001	PZ 3	50	2"

3855/4 Bits, stainless



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Stainless steel for minimising rust


		 mm	 mm
05071084001	PZ 1	89	3 1/2"
05071085001	PZ 2	89	3 1/2"
05071041001	PZ 2	50	2"
05071086001	PZ 3	89	3 1/2"

855/4 IMP DC Impaktor bits SB

			 4013288
05073961001		1 x PZ 2x50	158505
05073962001		1 x PZ 3x50	158512








Bits for Pozidriv Screws



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

855/4 BDC bits



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: BiTorsion for long service life, diamond-coated for secure screw fit. Take it easy toolfinder: Output colour coding (black = Pozidriv) and large stamp to enable the desired bit to be easily located.

		mm	
05059900001	PZ 1	50	2"
05059902001	PZ 2	50	2"
05059904001	PZ 3	50	2"

855/4 BTH bits



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: BiTorsion for long service life, extra-hard. Take it easy toolfinder: Output colour coding (black = Pozidriv) and large stamp to enable the desired bit to be easily located.

		mm	
05059910001	PZ 1	50	2"
05059912001	PZ 2	50	2"
05059914001	PZ 3	50	2"

855/4 BTZ bits



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: BiTorsion for long service life, extra-tough, for universal use. Take it easy toolfinder: Output colour coding (black = Pozidriv) and large stamp to enable the desired bit to be easily located.

		mm	
05059920001	PZ 1	50	2"
05059922001	PZ 2	50	2"
05059924001	PZ 3	50	2"

855/4 TH bits



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Torsion-style design to reduce premature wear, extra-hard

		mm	"
05060055001	PZ 1	50	2"
05060060001	PZ 2	50	2"
05060065001	PZ 3	50	2"

855/4 TZ bits



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Torsion-style design to reduce premature wear, tough, for universal use

		mm	"
05060005001	PZ 1	50	2"
05060010001	PZ 2	50	2"
05060015001	PZ 3	50	2"

855/4 TZ SB bits

		mm	"
05134384001	2 x PZ 1x50	037985	
05134385001	2 x PZ 2x50	037992	
05134386001	2 x PZ 3x50	038005	



855/4 Z bits



Application: Suitable for Pozidriv screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders


Design: Tough, for universal use

		mm	"	mm
05060027001	PZ 1	70	2 3/4"	4,5
05060029001	PZ 1	89	3 1/2"	4,5
05060031001	PZ 1	127	5"	4,5
05060030001	PZ 1	152	6"	4,5
05060033001	PZ 2	70	2 3/4"	6,0
05060035001	PZ 2	89	3 1/2"	6,0
05060037001	PZ 2	110	4 3/8"	6,0
05060036001	PZ 2	127	5"	6,0
05060038001	PZ 2	152	6"	6,0
05060041001	PZ 3	70	2 3/4"	-
05060043001	PZ 3	89	3 1/2"	-
05060045001	PZ 3	110	4 3/8"	-
05060047001	PZ 3	152	6"	-

855/4 Z SB bits

		mm	"
05073523001	1 x PZ 1x89	105905	
05073524001	1 x PZ 2x89	106452	
05073525001	1 x PZ 3x89	105912	





Bits for Pozidriv Screws



5/16" hexagon drive, suitable for D 8 bit holders or direct drive (series 2)

855/2 Z bits



Application: Suitable for Pozidriv screws

Drive: 5/16" hexagon, suitable for DIN ISO 1173-D 8 bit holders


Design: Tough, for universal use

		 mm	 mm	 mm
05058005001	PZ 1	32	1 1/4"	4,5
05058010001	PZ 2	32	1 1/4"	6,0
05058015001	PZ 3	32	1 1/4"	7,6
05058020001	PZ 4	32	1 1/4"	-
05058025001	PZ 4	38	1 1/2"	10,0



M 4 Thread drive M 4 direct drive (series 11)

855/11 Bits



Application: Suitable for Pozidriv screws

Drive: Thread drive M 4


Design: Tough, for universal use

		 mm	 mm	 mm
05065090001	PZ 1	33	1 1/4"	5,5
05065096001	PZ 2	33	1 1/4"	6,0



M 5 Thread drive M 5 direct drive (series 12)

855/12 Bits



Application: Suitable for Pozidriv screws

Drive: Thread drive M 5

Design: Tough, for universal use

		 mm	 mm	 mm
05065125001	PZ 2	33	1 1/4"	7,0
05065127001	PZ 2	35	1 3/8"	7,0
05065129001	PZ 2	44,5	1 3/4"	6,0



M 6 Thread drive M 6 direct drive (series 15)

855/15 Bits




Application: Suitable for Pozidriv screws

Drive: Thread drive M 6

Design: Tough, for universal use

		 mm	 mm	 mm
05065167001	PZ 2	35	1 3/8"	8,0
05065169001	PZ 2	44,5	1 3/4"	8,0





Bits for PlusMinus Screws – Slotted/Phillips



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

851/4 PH/S PlusMinus bits




Application: PlusMinus screws (Phillips/slotted)

Drive: 1/4" hexagon suitable for DIN ISO 1173-F 6.3 bit holders

Design: PlusMinus (Phillips/slotted), tough, ideal for electrical component adjustment jobs e.g. in sheet steel or metal

		 mm	 mm	 mm
05059720001	# 1	70	2 3/4"	4,5
05059721001	# 2	70	2 3/4"	6



Bits for PlusMinus Screws – Slotted/Pozidriv



1/4" hexagon drive, suitable for F 6.3 bit holders (series 1)

855/4 PZ/S PlusMinus bits




Application: PlusMinus (Pozidriv/slotted) screws

Drive: 1/4" hexagon suitable for DIN ISO 1173-F 6.3 bit holders

Design: PlusMinus (slotted/Pozidriv), tough, ideal for electrical component adjustment jobs e.g. in sheet steel or metal

		 mm	 mm	 mm
05059896001	# 1	70	2 3/4"	4,5
05059897001	# 2	70	2 3/4"	6





Bits for TORX® Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

867/1 IMP DC Impaktor TORX® bits



Application: TORX® socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: The Impaktor technology ensures an above-average service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance. Take it easy toolfinder: Output colour coding (green = TORX®) and large stamp to enable the desired bit to be easily located.

		mm	
05057628001	TX 10	25	1"
05057623001	TX 15	25	1"
05057624001	TX 20	25	1"
05057625001	TX 25	25	1"
05057626001	TX 30	25	1"
05057627001	TX 40	25	1"

3867/1 TS TORX® bits, stainless



Application: TORX® socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Stainless steel for minimising rust, special torsion-style design to reduce premature wear. Take it easy toolfinder: Output colour coding (green = TORX®) and large stamp to enable the desired bit to be easily located.

		mm	
05071030001	TX 8	25	1"
05071031001	TX 9	25	1"
05071032001	TX 10	25	1"
05071033001	TX 15	25	1"
05071034001	TX 20	25	1"
05071035001	TX 25	25	1"
05071036001	TX 27	25	1"
05071037001	TX 30	25	1"
05071038001	TX 40	25	1"

867/1 IMP DC SB Impaktor bits

			4013288
05073924001	1 x TX 20x25	163240	
05073925001	1 x TX 25x25	158406	
05073926001	1 x TX 30x25	158413	
05073927001	1 x TX 40x25	158420	



3867/1 TS SB TORX® bits, stainless

			4013288
05073620001	1 x TX 10x25	117670	
05073621001	1 x TX 15x25	117687	
05073622001	1 x TX 20x25	117694	
05073623001	1 x TX 25x25	117700	
05073624001	1 x TX 27x25	117717	
05073625001	1 x TX 30x25	117724	
05073626001	1 x TX 40x25	117731	



867/1 BDC TORX® bits



Application: TORX® socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: BiTorsion for long service life, diamond-coated for secure screw fit. Take it easy toolfinder: Output colour coding (green = TORX®) and large stamp to enable the desired bit to be easily located.

		mm	"
05066100001	TX 10	25	1"
05066102001	TX 15	25	1"
05066104001	TX 20	25	1"
05066106001	TX 25	25	1"
05342920001	TX 27	25	1"
05066108001	TX 30	25	1"
05066110001	TX 40	25	1"

867/1 BDC SB TORX® bits

05134374001	1 x TX 10x25	099778
05134375001	1 x TX 15x25	099785
05134376001	1 x TX 20x25	099792
05134377001	1 x TX 25x25	099808
05134378001	1 x TX 30x25	099822
05134379001	1 x TX 40x25	099815



Tip



Impaktor-Bits



Impact-Bits are needed when a strong power tool (e.g. 18 volt impact screwdriver) is used. Impact bits were specifically developed to withstand high power tool forces.



BDC-Bits



BDC-Bits are absolutely premium products. They have a softer BiTorsion zone which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits.

The diamond coating lowers the danger of slipping as the minute diamond particles literally "bite" themselves into the screw head. B stands for BiTorsion. DC stands for diamond coated.




"Take it easy"



"Take it easy" tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.





Bits for TORX® Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

867/1 BTZ TORX® bits



Application: TORX® socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: BitTorsion for long service life, extra-tough, for universal use. Take it easy toolfinder: Output colour coding (green = TORX®) and large stamp to enable the desired bit to be easily located.

		mm	"
05066120001	TX 10	25	1"
05066122001	TX 15	25	1"
05066124001	TX 20	25	1"
05066126001	TX 25	25	1"
05066128001	TX 30	25	1"
05066130001	TX 40	25	1"

867/1 Z TORX® HF bits with holding function



Application: TORX® socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Holding function for TORX® screws made according to Acument Intellectual Properties specifications, tough, for universal use

		mm	"	mm
05066070001	TX 8	25	1"	2,2
05066071001	TX 9	25	1"	2,4
05066072001	TX 10	25	1"	2,5
05066073001	TX 15	25	1"	3,0
05066074001	TX 20	25	1"	3,7
05066075001	TX 25	25	1"	4,1
05066076001	TX 27	25	1"	4,8
05066077001	TX 30	25	1"	5,4
05066078001	TX 40	25	1"	6,5

867/1 TZ TORX® bits



Application: TORX® socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Torsion-style design to reduce premature wear, tough, for universal use

		mm	"	mm
05066300001	TX 5	25	1"	4,2
05066301001	TX 6	25	1"	4,2
05066302001	TX 7	25	1"	4,2
05066303001	TX 8	25	1"	4,2
05066304001	TX 9	25	1"	4,2
05066305001	TX 10	25	1"	4,2
05066308001	TX 15	25	1"	4,2
05066310001	TX 20	25	1"	4,8
05066312001	TX 25	25	1"	5,5
05066313001	TX 27	25	1"	5,5
05066315001	TX 30	25	1"	6,0
05066320001	TX 40	25	1"	-

Tip



The HF profile



In tight assembly or disassembly situations, for example in engine compartments, it is not possible to securely hold the screw with the hand on the screwdriver, and the screw subsequently often gets lost. Lengthy searches or the loss of the screw (with the associated danger that could bring about) are the consequence. The HF

tools developed by Wera are ideal because they feature an optimised geometry of the original TORX® profile. The wedging forces resulting from the surface pressure between the drive tip and the screw profile mean that the screw is securely held on the tool!




BTZ-Bits



BTZ-Bits have an additional tempered BiTorsion zone, which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits.





Bits for TORX® Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

867/1 TORX® bits



Application: TORX® socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Tough, for universal use

		mm	"	mm
05135140001	TX 1	25	1"	1,5
05135141001	TX 2	25	1"	1,5
05135142001	TX 3	25	1"	2,0
05135143001	TX 4	25	1"	2,0
05066492001	TX 5	25	1"	3,0
05066493001	TX 6	25	1"	3,0
05066494001	TX 7	25	1"	3,0
05066495001	TX 8	25	1"	3,0
05066496001	TX 9	25	1"	3,0
05066485001	TX 10	25	1"	4,0
05066486001	TX 15	25	1"	4,0
05066487001	TX 20	25	1"	5,0
05066488001	TX 25	25	1"	5,0
05066489001	TX 27	25	1"	6,0
05066490001	TX 30	25	1"	6,0
05066491001	TX 40	25	1"	-
05066325001	TX 45	35	1 3/8"	8,0
05066330001	TX 50	35	1 3/8"	9,0
05066335001	TX 55	35	1 3/8"	12,0

867/1 DIY TORX® bits

		4013288
05072406001	10 x TX 10x25	115799
05072407001	10 x TX 15x25	115805
05072408001	10 x TX 20x25	115812
05072409001	10 x TX 25x25	115829
05072410001	10 x TX 27x25	115836
05072411001	10 x TX 30x25	115843
05072412001	10 x TX 40x25	115850



867/1 TORX® DIY 100

		4013288
05072446001	100 x TX 10x25	138507
05072447001	100 x TX 15x25	138514
05072448001	100 x TX 20x25	138521
05072449001	100 x TX 25x25	138538
05072450001	100 x TX 27x25	138545
05072451001	100 x TX 30x25	138552
05072452001	100 x TX 40x25	138569



867/1 SB TORX® bits

		4013288
05073313001	2 x TX 10x25	029140
05073340001	2 x TX 15x25	029591
05073314001	2 x TX 20x25	029157
05073315001	2 x TX 25x25	029164
05073316001	2 x TX 30x25	029171
05073317001	2 x TX 40x25	029188
05073346001	1 x TX 50x35	125859
05073375001	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25	037503
05073376001	1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25	037510



867/1 Z TORX® Wedge bits



Application: TORX® socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: W = Wedge TORX®, tough, for universal use

		 mm	 "
05066450001	TX 10	25	1"
05066455001	TX 15	25	1"
05066460001	TX 20	25	1"
05066465001	TX 25	25	1"
05066470001	TX 27	25	1"
05066475001	TX 30	25	1"
05066480001	TX 40	25	1"

867/1 ZA TORX® bits with central pin



Application: SPAX T-STAR plus screws


Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Central pin, tough, for universal use

		 mm	 "	 mm
05066080001	TX 10	25	1"	4,0
05066081001	TX 15	25	1"	4,0
05066082001	TX 20	25	1"	5,0
05066083001	TX 25	25	1"	5,0
05066084001	TX 30	25	1"	6,0
05066085001	TX 40	25	1"	-

Tip

TORX® Wedge




The conical TORX® profile provides a better fit in the screw. Combined with a great recess depth this produces a pinch effect.

TORX® bits with central pin



The protruding pin that fits into the borehole of the screw makes it easier to centre the tool in the screw recess.





Bits for TORX® Screws



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

867/4 IMP DC Impaktor TORX® bits



Application: TORX® socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: The Impaktor technology ensures an above-average service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance. Take it easy toolfinder: Output colour coding (green = TORX®) and large stamp to enable the desired bit to be easily located.

		mm	
05057664001	TX 20	50	2"
05057665001	TX 25	50	2"
05057666001	TX 30	50	2"
05057667001	TX 40	50	2"

867/4 IMP DC SB Impaktor bits

			4013288
05073964001		1 x TX 20x50	163257
05073965001		1 x TX 25x50	158529
05073966001		1 x TX 30x50	158536
05073967001		1 x TX 40x50	158543



3867/4 TORX®, stainless



Application: TORX® socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Stainless steel for minimising rust
Take it easy toolfinder: Output colour coding (green = TORX®) and large stamp to enable the desired bit to be easily located.

		mm	
05071046001	TX 20	50	2"
05071047001	TX 25	50	2"

867/4 KK TORX® bits



Application: TORX® socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Ball end, tough, for universal use

		mm	
05059700001	TX 10	89	3 1/2"
05059701001	TX 15	89	3 1/2"
05059702001	TX 20	89	3 1/2"
05059703001	TX 25	89	3 1/2"
05059704001	TX 30	89	3 1/2"
05059705001	TX 40	89	3 1/2"

867/4 TORX® HF bits with holding function



Application: TORX® socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders


Design: Holding function for TORX® screws made according to Acument Intellectual Properties specifications, tough, for universal use

		 mm	 mm	 mm
05060080001	TX 8	50	2"	3,0
05060360001	TX 10	89	3 1/2"	4,0
05060081001	TX 10	50	2"	4,0
05060361001	TX 15	89	3 1/2"	4,0
05060082001	TX 15	50	2"	4,0
05060362001	TX 20	89	3 1/2"	4,5
05060083001	TX 20	50	2"	4,5
05060084001	TX 25	50	2"	6,0
05060363001	TX 25	89	3 1/2"	6,0
05060085001	TX 27	50	2"	6,0
05060364001	TX 27	89	3 1/2"	6,0
05060086001	TX 30	50	2"	6,0
05060365001	TX 30	89	3 1/2"	6,0
05060087001	TX 40	50	2"	-
05060366001	TX 40	89	3 1/2"	-

Tip



TORX® ball tip



The spherical drive profile means that it is possible to swivel the axis of the tool to that of the screw, and therefore enable angled, "around-the-corner" screwdriving jobs.



The HF profile



In tight assembly or disassembly situations, for example in engine compartments, it is not possible to securely hold the screw with the hand on the screwdriver, and the screw subsequently often gets lost. Lengthy searches or the loss of the screw (with the associated danger that could bring about) are the consequence. The HF


tools developed by Wera are ideal because they feature an optimised geometry of the original TORX® profile. The wedging forces resulting from the surface pressure between the drive tip and the screw profile mean that the screw is securely held on the tool!



Impaktor-Bits



Impact-Bits are needed when a strong power tool (e.g. 18 volt impact screwdriver) is used. Impact bits were specifically developed to withstand high power tool forces.



Bits for TORX® Screws



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

867/4 Z TORX® bits



Application: TORX® socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Tough, for universal use

		 mm	 mm	 mm
05135200001	TX 1	50	2"	2,0
05135201001	TX 2	50	2"	2,0
05135202001	TX 3	50	2"	2,0
05135204001	TX 4	50	2"	3,0
05135205001	TX 5	50	2"	3,0
05308428001	TX 6	50	2"	3,0
05134740001	TX 6	70	2 3/4"	3,0
05332600001	TX 6	89	3 1/2"	3,0
05328448001	TX 6	152	6"	3,0
05160830001	TX 7	50	2"	3,0
05345047001	TX 7	70	2 3/4"	3,0
05060131001	TX 8	50	2"	3,0
05060098001	TX 8	70	2 3/4"	3,0
05060185001	TX 8	89	3 1/2"	3,0
05060195001	TX 8	152	6"	3,0
05319835001	TX 9	70	2 3/4"	3,0
05060193001	TX 9	89	3 1/2"	3,0
05060194001	TX 9	152	6"	3,0
05060132001	TX 10	50	2"	4,0
05060100001	TX 10	70	2 3/4"	4,0
05060186001	TX 10	89	3 1/2"	4,0
05060196001	TX 10	152	6"	4,0
05060133001	TX 15	50	2"	4,0
05060105001	TX 15	70	2 3/4"	4,0
05060187001	TX 15	89	3 1/2"	4,0
05060197001	TX 15	152	6"	4,0
05060134001	TX 20	50	2"	4,5
05060110001	TX 20	70	2 3/4"	4,5
05060188001	TX 20	89	3 1/2"	4,5
05060198001	TX 20	152	6"	4,5
05060135001	TX 25	50	2"	6,0
05060115001	TX 25	70	2 3/4"	6,0
05060189001	TX 25	89	3 1/2"	6,0
05060199001	TX 25	152	6"	6,0
05060136001	TX 27	50	2"	6,0
05060120001	TX 27	70	2 3/4"	6,0
05060190001	TX 27	89	3 1/2"	6,0
05060200001	TX 27	152	6"	6,0
05060137001	TX 30	50	2"	6,0
05060125001	TX 30	70	2 3/4"	6,0
05060191001	TX 30	89	3 1/2"	6,0
05060201001	TX 30	152	6"	6,0
05060138001	TX 40	50	2"	-
05060130001	TX 40	70	2 3/4"	-
05060192001	TX 40	89	3 1/2"	-
05060202001	TX 40	152	6"	-

867/4 Z SB TORX® bits, 89 mm

		 4013288
05073526001	1 x TX 10x89	105929
05073527001	1 x TX 15x89	105936
05073528001	1 x TX 20x89	105943
05073529001	1 x TX 25x89	105950
05073530001	1 x TX 30x89	105967
05073531001	1 x TX 40x89	105974



867/4 Z SB TORX® bits, 50 mm

		 4013288
05073720001	2 x TX 10x50	132789
05073721001	2 x TX 15x50	132796
05073722001	2 x TX 20x50	132802
05073723001	2 x TX 25x50	132826
05073724001	2 x TX 30x50	132833





5/16" hexagon drive, suitable for D 8 bit holders or direct drive (series 2)

867/2 Z TORX® bits




Application: TORX® socket screws

Drive: 5/16" hexagon, suitable for DIN ISO 1173-D 8 bit holders

Design: Tough, for universal use

		 mm	 mm	 mm
05066901001	TX 20	35	1 3/8"	4,5
05066930001	TX 20	50	2"	4,5
05066945001	TX 20	70	2 3/4"	4,5
05066935001	TX 20	100	4"	4,5
05066900001	TX 25	35	1 3/8"	5,8
05066931001	TX 25	50	2"	5,8
05066946001	TX 25	70	2 3/4"	5,8
05066936001	TX 25	100	4"	5,8
05066902001	TX 27	35	1 3/8"	5,8
05066932001	TX 27	50	2"	5,8
05066937001	TX 27	100	4"	5,8
05066905001	TX 30	35	1 3/8"	6,0
05066933001	TX 30	50	2"	6,0
05066947001	TX 30	70	2 3/4"	6,0
05066938001	TX 30	100	4"	6,0
05066910001	TX 40	35	1 3/8"	7,0
05066934001	TX 40	50	2"	7,0
05066948001	TX 40	70	2 3/4"	7,0
05066939001	TX 40	100	4"	7,0
05066915001	TX 45	35	1 3/8"	-
05066940001	TX 45	50	2"	-
05066949001	TX 45	70	2 3/4"	-
05066942001	TX 45	100	4"	-
05066920001	TX 50	35	1 3/8"	-
05066941001	TX 50	50	2"	-
05066950001	TX 50	70	2 3/4"	-
05066943001	TX 50	100	4"	-
05066925001	TX 55	35	1 3/8"	12,0
05136220001	TX 60	35	1 3/8"	14,0





Bits for TORX® Screws



M 4 Thread drive M 4 direct drive (series 11)

867/11 TORX® bits



Application: TORX® screws

Drive: Thread drive M 4

Design: Tough, for universal use

		 mm	 mm	 mm
05064140001	TX 8	33	1 1/4"	6,0
05064144001	TX 10	33	1 1/4"	6,0
05064146001	TX 15	33	1 1/4"	6,0



M 5 Thread drive M 5 direct drive (series 12)

867/12 TORX® bits



Application: TORX® socket screws

Drive: Thread drive M 5

Design: Tough, for universal use

		 mm	 mm	 mm
05064148001	TX 10	45	1 3/4"	6,0
05064150001	TX 15	45	1 3/4"	6,0
05064155001	TX 20	45	1 3/4"	6,0
05064160001	TX 25	45	1 3/4"	6,0



M 6 Thread drive M 6 direct drive (series 15)

867/15 TORX® bits



Application: TORX® screws

Drive: Thread drive M 6

Design: Tough, for universal use

		 mm	 "	 mm
05064166001	TX 10	45	1 ³ / ₄	8,0
05064168001	TX 15	45	1 ³ / ₄	8,0
05064170001	TX 20	45	1 ³ / ₄	8,0
05064175001	TX 25	45	1 ³ / ₄	8,0
05064180001	TX 30	45	1 ³ / ₄	8,0



#10/32 " Thread drive #10-32 UNF direct drive (series 16)

867/16 TORX® bits




Application: TORX® screws

Drive: Thread drive #10-32 UNF

Design: Tough, for universal use

		 mm	 "	 mm
05064185001	TX 10	45	1 ³ / ₄	6,0
05064190001	TX 15	45	1 ³ / ₄	6,0
05064200001	TX 20	45	1 ³ / ₄	6,0





Bits for TORX® Screws



4 mm 4 mm Halfmoon direct drive (series 9)

867/9 C TORX® bits, halfmoon



Application: TORX® socket screws

Drive: Halfmoon, 4 mm

Design: Precision hardened for sensitive applications

		 mm	 mm	 mm
05135220001	TX 1	44	1 ⁴⁷ / ₆₄ "	1,5
05135221001	TX 2	44	1 ⁴⁷ / ₆₄ "	1,5
05135222001	TX 3	44	1 ⁴⁷ / ₆₄ "	1,7
05345352001	TX 4	44	1 ⁴⁷ / ₆₄ "	1,8
05345018001	TX 4	64	2 ³³ / ₆₄ "	2,0
05345351001	TX 5	44	1 ⁴⁷ / ₆₄ "	3,0
05345032001	TX 5	64	2 ³³ / ₆₄ "	2,0
05314753001	TX 5	70	2 ³ / ₄ "	2,0
05345350001	TX 6	44	1 ⁴⁷ / ₆₄ "	3,0
05345056001	TX 6	64	2 ³³ / ₆₄ "	2,0
05332610001	TX 6	70	2 ³ / ₄ "	3,0
05345035001	TX 7	64	2 ³³ / ₆₄ "	2,3
05345026001	TX 8	44	1 ⁴⁷ / ₆₄ "	3,0
05345028001	TX 8	64	2 ³³ / ₆₄ "	3,0
05332609001	TX 8	70	2 ³ / ₄ "	3,0
05332607001	TX 10	70	2 ³ / ₄ "	3,0



4 mm 4 mm HIOS direct drive (series 21)

867/21 TORX® bits



Application: TORX® socket screws

Drive: HIOS 4 mm

Design: Precision hardened for sensitive applications

		 mm	 mm	 mm	 mm	 mm
05135400001 ¹⁾	TX 1	40	1 ⁹ / ₁₆ "	1,5	20	25 ¹ / ₃₂ "
05135401001 ¹⁾	TX 2	40	1 ⁹ / ₁₆ "	1,5	20	25 ¹ / ₃₂ "
05135402001 ¹⁾	TX 3	40	1 ⁹ / ₁₆ "	1,7	20	25 ¹ / ₃₂ "
05135403001	TX 4	40	1 ⁹ / ₁₆ "	1,8	20	25 ¹ / ₃₂ "
05135404001	TX 5	40	1 ⁹ / ₁₆ "	2,0	20	25 ¹ / ₃₂ "
05135405001	TX 6	40	1 ⁹ / ₁₆ "	2,0	20	25 ¹ / ₃₂ "
05135406001	TX 7	40	1 ⁹ / ₁₆ "	2,5	20	25 ¹ / ₃₂ "
05135407001	TX 8	40	1 ⁹ / ₁₆ "	3,0	20	25 ¹ / ₃₂ "
05135408001	TX 9	40	1 ⁹ / ₁₆ "	3,0	20	25 ¹ / ₃₂ "
05135409001	TX 10	40	1 ⁹ / ₁₆ "	3,0	20	25 ¹ / ₃₂ "

¹⁾ Delivery on request.



 5 mm 5 mm HIOS direct drive (series 22)

867/22 TORX® bits




Application: TORX® screws

Drive: HIOS 5 mm

Design: Tough, for universal use

						
		mm	"	mm	mm	"
05135420001	TX 5	60	2 3/8"	2,0	20	25/32"
05135421001	TX 6	60	2 3/8"	2,5	20	25/32"
05135422001	TX 7	60	2 3/8"	2,5	20	25/32"
05135423001	TX 8	60	2 3/8"	3,0	20	25/32"
05135424001	TX 9	60	2 3/8"	3,0	20	25/32"
05135425001	TX 10	60	2 3/8"	3,0	20	25/32"





Bits for Tamper-proof TORX® BO Screws with safety pin



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

867/1 Z TORX® BO bits



Application: TORX® socket screws with safety pin (BO = with bore hole)

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: TORX® with bore hole, tough, for universal use

		 mm	 "
05066497001	TX 7	25	1"
05066498001	TX 8	25	1"
05066499001	TX 9	25	1"
05066500001	TX 10	25	1"
05066505001	TX 15	25	1"
05066510001	TX 20	25	1"
05066515001	TX 25	25	1"
05066520001	TX 27	25	1"
05066525001	TX 30	25	1"
05066530001	TX 40	25	1"



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

3867/4 TORX® B0 bits with bore hole, stainless



Application: TORX® socket screws with safety pin (BO = with bore hole)

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Stainless steel for minimising rust

		mm		mm
05071089001	TX 10 BO	89	3 1/2"	4,0
05071090001	TX 15 BO	89	3 1/2"	4,0
05071091001	TX 20 BO	89	3 1/2"	4,5
05071092001	TX 25 BO	89	3 1/2"	5,5
05071094001	TX 30 BO	89	3 1/2"	6,0

867/4 Z TORX® B0 bits with bore hole





Application: TORX® socket screws with safety pin (BO = with bore hole)

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: TORX® with bore hole, tough, for universal use

		mm		mm
05060139001	TX 8	70	2 3/4"	3,0
05060048001	TX 8	89	3 1/2"	3,0
05060049001	TX 9	89	3 1/2"	3,0
05060140001	TX 10	70	2 3/4"	4,0
05060050001	TX 10	89	3 1/2"	4,0
05060141001	TX 15	70	2 3/4"	4,0
05060051001	TX 15	89	3 1/2"	4,0
05060142001	TX 20	70	2 3/4"	4,5
05060052001	TX 20	89	3 1/2"	4,5
05060143001	TX 25	70	2 3/4"	6,0
05060053001	TX 25	89	3 1/2"	6,0
05060144001	TX 27	70	2 3/4"	6,0
05060057001	TX 27	89	3 1/2"	6,0
05060145001	TX 30	70	2 3/4"	6,0
05060054001	TX 30	89	3 1/2"	6,0
05060146001	TX 40	70	2 3/4"	-
05060056001	TX 40	89	3 1/2"	-





Bits for TORX PLUS® Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

867/1 Z IP TORX PLUS® bits



Application: TORX PLUS® socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Tough, for universal use

		 mm	
05135120001	1 IP	25	1"
05135121001	2 IP	25	1"
05160956001	3 IP	25	1"
05134695001	4 IP	25	1"
05066272001	5 IP	25	1"
05066274001	6 IP	25	1"
05066276001	7 IP	25	1"
05066278001	8 IP	25	1"
05066279001	9 IP	25	1"
05066280001	10 IP	25	1"
05066282001	15 IP	25	1"
05066284001	20 IP	25	1"
05066286001	25 IP	25	1"
05066287001	27 IP	25	1"
05066288001	30 IP	25	1"
05066290001	40 IP	25	1"



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

867/4 Z IP TORX PLUS® bits




Application: TORX PLUS® socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Tough, for universal use

		 mm	 mm	 mm
05134664001	1 IP	50	2"	2,0
05134665001	2 IP	50	2"	2,0
05134668001	3 IP	50	2"	2,0
05134691001	4 IP	50	2"	3,0
05134678001	5 IP	50	2"	3,0
05134680001	6 IP	50	2"	3,0
05134667001	6 IP	89	3 1/2"	3,0
05134690001	6 IP	152	6"	3,0
05134681001	7 IP	50	2"	3,0
05134679001	8 IP	50	2"	3,0
05134670001	8 IP	89	3 1/2"	3,0
05134682001	8 IP	152	6"	3,0
05160917001	9 IP	50	2"	3,0
05134669001	9 IP	89	3 1/2"	3,0
05134683001	10 IP	50	2"	4,0
05134684001	10 IP	70	2 3/4"	4,0
05134671001	10 IP	89	3 1/2"	4,0
05134685001	15 IP	50	2"	4,0
05134686001	15 IP	70	2 3/4"	4,0
05134672001	15 IP	89	3 1/2"	4,0
05134687001	20 IP	50	2"	4,5
05134688001	20 IP	70	2 3/4"	4,5
05134673001	20 IP	89	3 1/2"	4,5
05134674001	25 IP	89	3 1/2"	6,0
05134675001	27 IP	89	3 1/2"	6,0
05320430001	30 IP	50	2"	6,0
05134676001	30 IP	89	3 1/2"	6,0
05134677001	40 IP	89	3 1/2"	-





Bits for TORX PLUS® Screws



4 mm 4 mm Halfmoon direct drive (series 9)

867/9 C IP TORX PLUS® bits, halfmoon



Application: TORX PLUS® screws

Drive: Halfmoon, 4 mm

Design: Precision hardened for sensitive applications

		 mm	 mm	 mm	 mm	 mm
05135230001	1 IP	44	1 ⁴⁷ / ₆₄ "	1,5	20	²⁵ / ₃₂ "
05135231001	2 IP	44	1 ⁴⁷ / ₆₄ "	1,5	20	²⁵ / ₃₂ "
05135232001	3 IP	44	1 ⁴⁷ / ₆₄ "	1,7	20	²⁵ / ₃₂ "
05326310001	4 IP	44	1 ⁴⁷ / ₆₄ "	2,0	20	²⁵ / ₃₂ "
05345019001	4 IP	64	2 ³³ / ₆₄ "	2,0	20	²⁵ / ₃₂ "
05135233001	5 IP	44	1 ⁴⁷ / ₆₄ "	2,0	20	²⁵ / ₃₂ "
05332612001	5 IP	70	2 ³ / ₄ "	3,0	20	²⁵ / ₃₂ "
05344900001	6 IP	44	1 ⁴⁷ / ₆₄ "	2,25	20	²⁵ / ₃₂ "
05135234001	8 IP	44	1 ⁴⁷ / ₆₄ "	3,0	20	²⁵ / ₃₂ "
05332606001	8 IP	70	2 ³ / ₄ "	3,0	20	²⁵ / ₃₂ "
05135235001	10 IP	44	1 ⁴⁷ / ₆₄ "	3,0	20	²⁵ / ₃₂ "



4 mm 4 mm HIOS direct drive (series 21)

867/21 IP TORX PLUS® bits




Application: TORX PLUS® screws

Drive: HIOS 4 mm

Design: Precision hardened for sensitive applications

		 mm	 mm	 mm	 mm	 mm
05135430001 ¹⁾	1 IP	40	1 ⁹ / ₁₆ "	1,5	20	²⁵ / ₃₂ "
05135431001 ¹⁾	2 IP	40	1 ⁹ / ₁₆ "	1,5	20	²⁵ / ₃₂ "
05135432001 ¹⁾	3 IP	40	1 ⁹ / ₁₆ "	1,7	20	²⁵ / ₃₂ "
05302402001	4 IP	40	1 ⁹ / ₁₆ "	1,8	20	²⁵ / ₃₂ "
05302403001	5 IP	40	1 ⁹ / ₁₆ "	2,0	20	²⁵ / ₃₂ "
05302400001	6 IP	40	1 ⁹ / ₁₆ "	2,0	20	²⁵ / ₃₂ "
05135433001	7 IP	40	1 ⁹ / ₁₆ "	2,5	20	²⁵ / ₃₂ "
05135434001	8 IP	40	1 ⁹ / ₁₆ "	3,0	20	²⁵ / ₃₂ "
05135435001	9 IP	40	1 ⁹ / ₁₆ "	3,0	20	²⁵ / ₃₂ "
05135436001	10 IP	40	1 ⁹ / ₁₆ "	3,0	20	²⁵ / ₃₂ "



Bits for TORX PLUS® Screws



5 mm 5 mm HIOS direct drive (series 22)

867/22 IP TORX PLUS® bits



Application: TORX PLUS® screws

Drive: HIOS 5 mm

Design: Precision hardened for sensitive applications

		 mm	 mm	 mm	 mm	 mm
05135440001	5 IP	60	2 3/8"	2,0	20	25/32"
05344280001	6 IP	60	2 3/8"	2,5	20	25/32"
05135441001	7 IP	60	2 3/8"	2,5	20	25/32"
05134500001	8 IP	60	2 3/8"	3,0	20	25/32"
05344281001	8 IP	80	3 1/8"	3,0	20	25/32"
05135442001	9 IP	60	2 3/8"	3,0	20	25/32"
05135443001	10 IP	60	2 3/8"	3,0	20	25/32"
05344282001	10 IP	80	3 1/8"	3,0	20	25/32"





Bits for Tamper-proof TORX PLUS® IPR Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

867/1 IPR TORX PLUS® bits with bore hole



Application: TORX PLUS® IPR socket screws with safety pin

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Tough, for universal use

		 mm	 mm
05134699001	8 IPR	25	1"
05134698001	9 IPR	25	1"
05134700001	10 IPR	25	1"
05134701001	15 IPR	25	1"
05134702001	20 IPR	25	1"
05134703001	25 IPR	25	1"
05134704001	27 IPR	25	1"
05134705001	30 IPR	25	1"
05134706001	40 IPR	35	1 3/8"
05134707001	45 IPR	35	1 3/8"

Attention: Safety profile - sold only to authorised customers. Such authorisation has to be proven in writing.



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

867/4 IPR TORX PLUS® bits with bore hole



Application: TORX PLUS® IPR socket screws with safety pin


Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Tough, for universal use

		 mm	 mm	 mm
05160821001	10 IPR	50	2"	4,0
05134657001	10 IPR	89	3 1/2"	4,0
05134654001	15 IPR	50	2"	4,0
05134720001	15 IPR	89	3 1/2"	4,0
05204126001	20 IPR	50	2"	4,5
05259135001	20 IPR	89	3 1/2"	4,5
05134655001	25 IPR	50	2"	6,0
05134722001	25 IPR	89	3 1/2"	6,0
05134656001	27 IPR	50	2"	6,0
05134658001	27 IPR	89	3 1/2"	6,0
05134732001	30 IPR	50	2"	6,0
05134723001	30 IPR	89	3 1/2"	6,0

Attention: Safety profile - sold only to authorised customers. Such authorisation has to be proven in writing.





Bits for ASSY® Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

864/1 BTZ SIT bits



Application: ASSY® screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: BiTorsion for long service life, extra-tough, for universal use

		mm	
05066040001	SIT 10	25	1"
05066041001	SIT 20	25	1"
05066042001	SIT 25	25	1"
05066043001	SIT 30	25	1"

864/1 Z SIT bits




Application: ASSY® screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Tough, for universal use

		mm	
05066030001	SIT 10	25	1"
05066031001	SIT 20	25	1"
05066032001	SIT 25	25	1"
05066033001	SIT 30	25	1"





Bits for Slotted Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

3800/1 TS bits for slotted screws, stainless



Application: Slotted screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Stainless steel for minimising rust, special torsion-style design to reduce premature wear. Take it easy toolfinder: Output colour coding (yellow = slotted) and large stamp to enable the desired bit to be easily located.

	 mm	 mm	 mm	 "
05071000001	0,8	5,5	25	1"
05071001001	1,0	5,5	25	1"
05071002001	1,2	6,5	25	1"

800/1 BTZ bits



Application: Slotted screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: BiTorsion for long service life, extra-tough, for universal use. Take it easy toolfinder: Output colour coding (yellow = slotted) and large stamp to enable the desired bit to be easily located.

	 mm	 mm	 mm	 "
05056064001	0,8	5,5	25	1"
05056066001	1,0	5,5	25	1"
05056068001	1,2	6,5	25	1"

800/1 BDC bits



Application: Slotted screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: BiTorsion for long service life, diamond-coated for secure screw fit. Take it easy toolfinder: Output colour coding (yellow = slotted) and large stamp to enable the desired bit to be easily located.

	 mm	 mm	 mm	 "
05056172001	0,8	5,5	25	1"
05056174001	1,0	5,5	25	1"
05056176001	1,2	6,5	25	1"

800/1 TZ bits



Application: Slotted screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Torsion-style design to reduce premature wear, tough, for universal use

	 mm	 mm	 mm	 "	 mm
05056203001	0,5	4,0	25	1"	4,0
05056210001	0,6	4,5	25	1"	4,5
05056220001	0,8	5,5	25	1"	5,5
05056225001	1,0	5,5	25	1"	5,5
05056233001	1,2	6,5	25	1"	6,2
05056240001	1,6	8,0	25	1"	8,0

800/1 Z bits



Application: Slotted screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Tough, for universal use

					
	mm	mm	mm	"	mm
05056200001	0,5	3,0	25	1"	3,0
05056005001	0,5	3,0	39	1 17/32"	3,0
05072050001	0,5	4,0	25	1"	4,0
05056007001	0,5	4,0	39	1 17/32"	4,0
05056010001	0,6	3,5	39	1 17/32"	3,5
05072055001	0,6	4,5	25	1"	4,5
05056015001	0,6	4,5	39	1 17/32"	4,5
05072057001	0,8	5,5	25	1"	5,5
05056020001	0,8	4,0	39	1 17/32"	4,0
05056025001	0,8	5,5	39	1 17/32"	5,5
05072059001	1,0	5,5	25	1"	5,5
05056030001	1,0	5,5	39	1 17/32"	5,5
05072061001	1,2	6,5	25	1"	6,2
05072063001	1,2	8,0	25	1"	8,0
05056037001	1,2	6,5	39	1 17/32"	6,5
05056040001	1,2	8,0	39	1 17/32"	8,0
05072065001	1,6	8,0	25	1"	8,0
05056045001	1,6	8,0	39	1 17/32"	8,0

800/1 Z Set SB

		
		4013288
05073300001	1 x 0.6x4.5x25; 1 x 0.8x5.5x25	029010
05073301001	1 x 1.0x5.5x25; 1 x 1.2x6.5x25	029027
05073302001	1 x 0.6x4.5x25; 1 x 1.0x5.5x25; 1 x 1.2x6.5x25	029034



800/1 Z Set D


		
		4013288
05073303001	1 x 1.0x5.5x25	029041
	1 x PH 2x25	
	1 x PZ 2x25	



Tip




Stainless Steel Bits



Wera stainless steel bits are manufactured out of stainless steel so unsightly rust can be avoided. The stainless steel bits from Wera are vacuum ice-hardened and have the hardness and strength needed for screw connections. There are no limitations to the industrial applications they are suitable for.



BDC-Bits



BDC-Bits are absolutely premium products. They have a softer BiTorsion zone which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits.


The diamond coating lowers the danger of slipping as the minute diamond particles literally "bite" themselves into the screw head. B stands for BiTorsion. DC stands for diamond coated.



"Take it easy"



"Take it easy" tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.



Bits for Slotted Screws



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

3800/4 Bits for slotted screws, stainless



Application: Slotted screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Stainless steel for minimising rust

	 mm	 mm	 mm	 mm
05071080001	1,0	5,5	89	3 1/2"

800/4 Z bits



Application: Slotted screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Tough, for universal use

	 mm	 mm	 mm	 mm	 mm
05059305001	0,5	3,0	50	2"	3,0
05059466001	0,5	3,0	70	2 3/4"	3,0
05059307001	0,5	4,0	50	2"	4,0
05059310001	0,6	3,5	50	2"	3,5
05059472001	0,6	3,5	70	2 3/4"	3,5
05059450001	0,6	3,5	152	6"	3,5
05059315001	0,6	4,5	50	2"	4,5
05059489001	0,6	4,5	89	3 1/2"	4,5
05059320001	0,8	4,0	50	2"	4,0
05059478001	0,8	4,0	70	2 3/4"	4,0
05059480001	0,8	4,0	89	3 1/2"	4,0
05059451001	0,8	4,0	152	6"	4,0
05059325001	0,8	5,5	50	2"	5,5
05059330001	1,0	5,5	50	2"	5,5
05059486001	1,0	5,5	70	2 3/4"	5,5
05059488001	1,0	5,5	89	3 1/2"	5,5
05059452001	1,0	5,5	152	6"	5,5
05059335001	1,0	6,0	50	2"	6,0
05059337001	1,2	6,5	50	2"	6,2
05059492001	1,2	6,5	70	2 3/4"	6,2
05059490001	1,2	6,5	89	3 1/2"	6,2
05059453001	1,2	6,5	152	6"	6,2
05059340001	1,2	8,0	50	2"	8,0
05059496001	1,2	8,0	89	3 1/2"	8,0
05059345001	1,6	8,0	50	2"	8,0
05059500001	1,6	8,0	89	3 1/2"	8,0



5/16" hexagon drive, suitable for D 8 bit holders or direct drive (series 2)

800/2 Z bits



Application: Slotted screws

Drive: 5/16" hexagon, suitable for DIN ISO 1173-D 8 bit holders

Design: Tough, for universal use

					
	mm	mm	mm		mm
05057210001	0,8	5,5	41	1 19/32"	5,5
05057213001	1,0	5,5	41	1 19/32"	5,5
05057223001	1,2	6,5	41	1 19/32"	6,5
05057225001	1,2	8,0	41	1 19/32"	7,8
05057230001	1,6	8,0	41	1 19/32"	7,8
05057235001	1,6	10,0	41	1 19/32"	7,8
05057240001	2,0	12,0	41	1 19/32"	12,0
05057250001	2,5	14,0	41	1 19/32"	14,0
05057255001	2,5	16,0	41	1 19/32"	16,0



4 mm 4 mm Halfmoon direct drive (series 9)

800/9 C bits



Application: Slotted screws

Drive: Halfmoon, 4 mm

Design: Hard

					
	mm	mm	mm		mm
05135265001	0,23	1,5	44	1 47/64"	1,8
05135266001	0,40	2,0	44	1 47/64"	2,0
05135267001	0,50	3,0	44	1 47/64"	3,0



Guide Sleeves

807/4 Z bits




Application: Slotted screws with integrated guide sleeve

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Tough, for universal use

					
	mm	mm	mm		mm
05059503001	0,8	4,0	90	3 1/2"	10
05059507001	1,0	5,5	90	3 1/2"	11
05059515001	1,2	8,0	90	3 1/2"	13
05059517001	1,6	8,0	90	3 1/2"	13



Bits for Hexagon Socket Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

840/1 IMP DC Impaktor bits



Application: Hexagon socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: The Impaktor technology ensures an above-average service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance. Take it easy toolfinder: Output colour coding (blue = hexagon) and large stamp to enable the desired bit to be easily located.

	mm	mm	"
05057603001	3,0	25	1"
05057604001	4,0	25	1"
05057605001	5,0	25	1"
05057606001	6,0	25	1"

840/1 IMP DC Impaktor bits SB

		4013288
05073904001	1 x 4.0x25	158338
05073905001	1 x 5.0x25	158345
05073906001	1 x 6.0x25	158352



3840/1 TS bits, stainless



Application: Hexagon socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Hex-Plus, stainless steel for minimising rust, special torsion-style design to reduce premature wear. Take it easy toolfinder: Output colour coding (blue = hexagon) and large stamp to enable the desired bit to be easily located.

	mm	mm	"
05071070001	1,5	25	1"
05071071001	2,0	25	1"
05071072001	2,5	25	1"
05071073001	3,0	25	1"
05071074001	4,0	25	1"
05071075001	5,0	25	1"
05071077001	5,5	25	1"
05071076001	6,0	25	1"
05071060001	3/32"	25	1"
05071061001	7/64"	25	1"
05071062001	1/8"	25	1"
05071063001	9/64"	25	1"
05071064001	5/32"	25	1"
05071065001	3/16"	25	1"
05071066001	1/4"	25	1"

840/1 BTZ bits



Application: Hexagon socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Hex-Plus, BiTorsion for long service life, extra-tough, for universal use. Take it easy toolfinder: Output colour coding (blue = hexagon) and large stamp to enable the desired bit to be easily located.

	mm	mm	"
05056680001	1,5	25	1"
05056681001	2,0	25	1"
05056682001	2,5	25	1"
05056683001	3,0	25	1"
05056684001	4,0	25	1"
05056685001	5,0	25	1"
05056686001	5,5	25	1"
05056687001	6,0	25	1"

840/1 Z bits



Application: Hexagon socket screws

Drive: $\frac{1}{4}$ " hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Hex-Plus, tough, for universal use

				
	mm		mm	"
05056303001	1,5		25	1"
05056305001	2,0		25	1"
05056310001	2,5		25	1"
05056315001	3,0		25	1"
05056320001	4,0		25	1"
05056325001	5,0		25	1"
05056330001	6,0		25	1"
05056332001	7,0		25	1"
05056335001	8,0		25	1"
05056340001	10,0		25	1"
05135060001		0,05"	25	1"
05135070001		$\frac{1}{16}$ "	25	1"
05135071001		$\frac{5}{64}$ "	25	1"
05135072001		$\frac{3}{32}$ "	25	1"
05135078001		$\frac{7}{64}$ "	25	1"
05135073001		$\frac{1}{8}$ "	25	1"
05135069001		$\frac{9}{64}$ "	25	1"
05135074001		$\frac{5}{32}$ "	25	1"
05135075001		$\frac{3}{16}$ "	25	1"
05135079001		$\frac{7}{32}$ "	25	1"
05135076001		$\frac{1}{4}$ "	25	1"
05135077001		$\frac{5}{16}$ "	25	1"
05135068001		$\frac{3}{8}$ "	25	1"

840/1 Z Set SB

			
05073342001		1 x 2.0x25; 1 x 2.5x25; 1 x 3.0x25	4013288 029607
05073344001		1 x 4.0x25; 1 x 5.0x25; 1 x 6.0x25	029614



842/1 Z bits




Application: Hexagon socket screws

Drive: $\frac{1}{4}$ " hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Ball end, tough, for universal use

				
	mm		mm	"
05056350001	2,5		25	1"
05056352001	3,0		25	1"
05056354001	4,0		25	1"
05056356001	5,0		25	1"
05056358001	6,0		25	1"
05380103001		$\frac{3}{32}$ "	25	1"
05380104001		$\frac{7}{64}$ "	25	1"
05380105001		$\frac{1}{8}$ "	25	1"
05380106001		$\frac{9}{64}$ "	25	1"
05380107001		$\frac{5}{32}$ "	25	1"
05380108001		$\frac{3}{16}$ "	25	1"
05380109001		$\frac{7}{32}$ "	25	1"
05380110001		$\frac{1}{4}$ "	25	1"





Bits for Hexagon Socket Screws



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

840/4 IMP DC Impaktor bits



Application: Hexagon socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: The Impaktor technology ensures an above-average service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance. Take it easy toolfinder: Output colour coding (blue = hexagon) and large stamp to enable the desired bit to be easily located.

	mm	mm	"
05057644001	4,0	50	2"
05057645001	5,0	50	2"
05057646001	6,0	50	2"

3840/4 Bits, stainless



Application: Hexagon socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Stainless steel for minimising rust

	mm	mm	"
05071101001	3,0	89	3 1/2"
05071102001	4,0	89	3 1/2"
05071103001	5,0	89	3 1/2"
05071049001	5,5	50	2"
05071104001	6,0	89	3 1/2"
05071105001	3/32"	89	3 1/2"
05071106001	1/8"	89	3 1/2"
05071107001	5/32"	89	3 1/2"
05071108001	3/16"	89	3 1/2"

840/4 IMP DC Impaktor bits SB

		4013288
05073944001	1 x 4.0x50	158451
05073945001	1 x 5.0x50	158468
05073946001	1 x 6.0x50	158475



840/4 Z bits



Application: Hexagon socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Hex-Plus, tough, for universal use

	mm	mm	mm	mm
05059602001	1,5	50	2"	2,0
05059603001	2,0	50	2"	4,0
05059628001	2,0	89	3 1/2"	4,0
05059604001	2,5	50	2"	4,0
05059629001	2,5	89	3 1/2"	4,0
05059605001	3,0	50	2"	4,0
05059630001	3,0	89	3 1/2"	4,0
05380033001	3,0	152	6"	4,0
05059610001	4,0	50	2"	5,0
05059631001	4,0	89	3 1/2"	5,0
05059634001	4,0	152	6"	5,0
05059615001	5,0	50	2"	6,0
05059632001	5,0	89	3 1/2"	6,0
05059635001	5,0	152	6"	6,0
05059620001	6,0	50	2"	5,0
05059633001	6,0	89	3 1/2"	-
05059636001	6,0	152	6"	-
05059625001	8,0	50	2"	-
05350430001	0,05"	50	2"	2,5
05135090001	1/16"	50	2"	2,5
05380045001	1/8"	152	6"	4,0
05135091001	5/64"	50	2"	3,0
05059660001	5/64"	89	3 1/2"	3,0
05135092001	3/32"	50	2"	3,0
05059661001	3/32"	89	3 1/2"	3,5
05135093001	7/64"	50	2"	3,5
05059662001	7/64"	89	3 1/2"	4,0
05135094001	1/8"	50	2"	4,0
05059663001	1/8"	89	3 1/2"	4,0
05135095001	9/64"	50	2"	4,5
05059664001	9/64"	89	3 1/2"	4,5
05380046001	9/64"	152	6"	4,5
05135096001	5/32"	50	2"	5,0
05059665001	5/32"	89	3 1/2"	5,0
05380047001	5/32"	152	6"	5,0
05135097001	3/16"	50	2"	6,0
05059666001	3/16"	89	3 1/2"	6,0
05380048001	3/16"	152	6"	6,0
05135098001	7/32"	50	2"	-
05059667001	7/32"	89	3 1/2"	-
05380049001	7/32"	152	6"	-
05135099001	1/4"	50	2"	-
05059668001	1/4"	89	3 1/2"	-
05380050001	1/4"	152	6"	-
05346288001	5/16"	50	2"	-

Tip



Impaktor-Bits



Impact-Bits are needed when a strong power tool (e.g. 18 volt impact screwdriver) is used. Impact bits were specifically developed to withstand high power tool forces.



Hex-Plus




Hexagon screws can endure a problem because the contact surfaces delivering the power from the conventional tool, is transferred to the screw via very small surface areas. The consequence: the screw can become damaged (rounding out). Hex-Plus tools have a greater contact surface that prevents this from happening! Good to know: Hex-Plus tools fit into every standard hexagon socket screw!



"Take it easy"



"Take it easy" tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.



Bits for Hexagon Socket Screws



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

842/4 Bits



Application: Hexagon socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Ball end, tough, for universal use

	 mm	 mm	 mm	 "
05059680001	3,0		89	3 1/2"
05059681001	4,0		89	3 1/2"
05059682001	5,0		89	3 1/2"
05059683001	6,0		89	3 1/2"
05380124001		3/32"	89	3 1/2"
05380125001		7/64"	89	3 1/2"
05380126001		1/8"	89	3 1/2"
05380127001		9/64"	89	3 1/2"
05380128001		5/32"	89	3 1/2"
05380129001		3/16"	89	3 1/2"
05380130001		7/32"	89	3 1/2"
05380131001		1/4"	89	3 1/2"



5/16" hexagon drive, suitable for D 8 bit holders or direct drive (series 2)

840/2 Z Bits




Application: Hexagon socket screws

Drive: 5/16" hexagon, suitable for DIN ISO 1173-D 8 bit holders

Design: Hex-Plus, tough, for universal use

	 mm	 mm	 mm	 mm
05057505001	3		30	1 3/16"
05057510001	4		30	1 3/16"
05057550001	4		50	2"
05057560001	4		70	2"
05057570001	4		100	4"
05057515001	5		30	1 3/16"
05057551001	5		50	2"
05057561001	5		70	2 3/4"
05057571001	5		100	4"
05057520001	6		30	1 3/16"
05057552001	6		50	2"
05057562001	6		70	2 3/4"
05057572001	6		100	4"
05057553001	7		50	2"
05057573001	7		100	4"
05057525001	8		30	1 3/16"
05057554001	8		50	2"
05057563001	8		70	2 3/4"
05057574001	8		100	4"
05057530001	10		30	1 3/16"
05057555001	10		50	2"
05057575001	10		100	4"
05221102001		5/32"	30	1 3/16"
05057565001		5/32"	70	2 3/4"
05135083001		3/16"	30	1 3/16"
05135084001		7/32"	30	1 3/16"
05057566001		7/32"	70	2 3/4"
05135080001		1/4"	30	1 3/16"
05057567001		1/4"	70	2 3/4"
05135081001		5/16"	30	1 3/16"
05057568001		5/16"	70	2 3/4"
05135082001		3/8"	30	1 3/16"





Bits for Hexagon Socket Screws



4 mm 4 mm Halfmoon direct drive (series 9)

840/9 C bitsHex-Plus




Application: Hexagon socket screws

Drive: Halfmoon, 4 mm

Design: Hard

	 mm	 mm	 "	 mm
05135268001	1,5	44	1 ⁴⁷ / ₆₄ "	2,6
05135269001	2,0	44	1 ⁴⁷ / ₆₄ "	2,6



Bits for Tamper-Proof Hexagon Socket Screws with safety pin



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

840/1 Z Tamper-proof Hex-Plus B0 bits



Application: Hexagon socket screws with safety pin (B0 = with bore hole)

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Hex-Plus with bore hole, tough, for universal use

	 mm	 mm	 mm
05056341001	2,0	25	1"
05056342001	2,5	25	1"
05056343001	3,0	25	1"
05056344001	4,0	25	1"
05056345001	5,0	25	1"
05056346001	6,0	25	1"



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

840/4 Z Tamper-proof Hex-Plus B0 bits




Application: Hexagon socket screws with safety pin (B0 = with bore hole)

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Hex-Plus with bore hole, tough, for universal use

	 mm	 mm	 mm	 mm
05059640001	2,0	89	3 1/2"	4,0
05059641001	2,5	89	3 1/2"	4,0
05059642001	3,0	89	3 1/2"	4,0
05059643001	4,0	89	3 1/2"	5,0
05059644001	5,0	89	3 1/2"	6,0
05059645001	6,0	89	3 1/2"	-





Bits for Square Socket Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

868/1 IMP DC Impaktor Square-Plus bits



Application: Square socket head screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: The Impaktor technology ensures an above-average service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance

		mm	
05057631001	# 2	25	1"
05057632001	# 3	25	1"

868/1 IMP DC SB Impaktor Square-Plus bits

05073931001		1 x # 2x25	158437
05073932001		1 x # 3x25	158444



3868/1 TS Square-Plus bits, stainless



Application: Square socket head screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Stainless steel for minimising rust, special torsion-style design to reduce premature wear

		mm	
05071025001	# 2	25	1"

868/1 BTZ Square-Plus bits



Application: Square socket head screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: BiTorsion for long service life, extra-tough, for universal use

		mm		mm
05066445001	# 1	25	1"	4,2
05066446001	# 2	25	1"	4,2
05066447001	# 3	25	1"	5,5

868/1 Z Square-Plus bits



Application: Square socket head screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Tough, for universal use

		 mm	 1"	 mm
05066395001	# 00	25	1"	3,5
05066400001	# 0	25	1"	3,5
05066405001	# 1	25	1"	4,5
05066410001	# 2	25	1"	6,0
05066415001	# 3	25	1"	6,0
05066420001	# 4	25	1"	8,0

868/1 V Square-Plus bits



Application: Square socket head screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Tough, for universal use, with holding function

		 mm	 1"	 mm
05340245001	# 1	25	1"	6,1
05066394001	# 2	25	1"	6,1
05066396001	# 3	25	1"	6,1

Tip




Impaktor-Bits



For an above-average service life. Maximum utilisation of the material properties, a very special geometry – designed particularly to meet the extreme demands – as well as a specific manufacturing process mean that Wera Impaktor tools have an above-average service life. Another product advantage is the coating of the Impaktor


bits with minute diamond particles. These diamond particles reduce the cam-out effects – particularly high in power tool applications – which can lead to a slipping out of the screw head. The diamond particles literally bite themselves into the screw recess. This means that less contact pressure is required, something that greatly delays fatigue setting-in in power tool screwdriving jobs.

V bits for square recess screws



V bits have a conical profile. The clamping forces thus resulting hold Robertson screws securely on the tip of the tool. Ideal for screwdriving at difficult-to-access places.





Bits for Square Socket Screws



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

868/4 IMP DC Impaktor Square-Plus bits



Application: Square socket head screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: The Impaktor technology ensures an above-average service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry, particularly suitable for use with conventional impact drivers, the rough diamond coating reduces the danger of any slipping out of the screw head due to the enhanced frictional resistance

		 mm	 mm
05057671001	# 2	50	2"
05057672001	# 3	50	2"

868/4 IMP DC SB Impaktor Square-Plus bits

05073971001		1 x # 2x50	158550
05073972001		1 x # 3x50	158567



3868/4 Square-Plus bits, stainless



Application: Square socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Stainless steel for minimising rust

		 mm	 mm	 mm
05071097001	# 1	89	3 1/2"	4,5
05071098001	# 2	89	3 1/2"	5,0
05071099001	# 3	89	3 1/2"	5,5

868/4 BTZ Square-Plus bits



Application: Square socket head screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: BiTorsion for long service life, extra-tough, for universal use

		 mm	 mm	 mm
05060147001	#1	50	2"	4,2
05060148001	#2	50	2"	4,2
05060149001	#3	50	2"	5,5

868/4 Square-Plus bits



Application: Square socket head screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Tough, for universal use

		 mm	 "	 mm
05060150001	# 00	50	2"	3,5
05060155001	# 0	50	2"	3,5
05060160001	# 1	50	2"	4,5
05060180001	# 1	70	2 3/4"	4,5
05134800001	# 1	89	3 1/2"	4,5
05134805001	# 1	152	6"	4,5
05060165001	# 2	50	2"	6,0
05060182001	# 2	70	2 3/4"	6,0
05134801001	# 2	89	3 1/2"	6,0
05134806001	# 2	152	6"	6,0
05060170001	# 3	50	2"	6,0
05060184001	# 3	70	2 3/4"	6,0
05134802001	# 3	89	3 1/2"	6,0
05134807001	# 3	152	6"	6,0
05060175001	# 4	50	2"	8,0

868/4 V Square-Plus bits



Application: Square socket head screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders


Design: Tough, for universal use, with holding function

		 mm	 "	 mm
05060300001	# 1	50	2"	4,5
05060297001	# 1	89	3 1/2"	4,5
05060301001	# 2	50	2"	6,0
05060302001	# 2	70	2 3/4"	6,0
05060303001	# 2	89	3 1/2"	6,0
05060304001	# 2	152	6"	6,0
05060296001	# 3	50	2"	6,0
05060298001	# 3	89	3 1/2"	6,0

Tip



BTZ-Bits



BTZ-Bits have an additional tempered BiTorsion zone, which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits.




Stainless Steel Bits




Wera stainless steel bits are manufactured out of stainless steel so unsightly rust can be avoided. The stainless steel bits from Wera are vacuum ice-hardened and have the hardness and strength needed for screw connections. There are no limitations to the industrial applications they are suitable for.

V bits for square recess screws



V bits have a conical profile. The clamping forces thus resulting hold Robertson screws securely on the tip of the tool. Ideal for screwdriving at difficult-to-access places.





Bits for TORQ-SET® Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

871/1 DC TORQ-SET® Mplus bits



Application: TORQ-SET® screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Mplus for higher breaking torque and longer service life, diamond-coated for secure screw fit

					
	mm		mm		mm
05066638001	4		25	1"	4,7
05066640001	6		25	1"	4,7
05066642001	8		25	1"	6,0
05066644001	10		25	1"	6,0
05066646001	6	1/4"	32	1 1/4"	11,0

871/1 TORQ-SET® Mplus bits, 32 mm



Application: TORQ-SET® screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Mplus for higher breaking torque and longer service life, tough, for universal use

				
		mm		mm
05066634001	1/4"	32	1 1/4"	11,0
05066635001	5/16"	32	1 1/4"	11,0

871/1 TORQ-SET® Mplus bits, 25 mm



Application: TORQ-SET® screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Mplus for higher breaking torque and longer service life, tough, for universal use

					
	mm		mm		mm
05066618001	0		25	1"	4,7
05066619001	1		25	1"	4,7
05066620001	2		25	1"	4,7
05066622001	3		25	1"	4,7
05066624001	4		25	1"	4,7
05066626001	5		25	1"	4,7
05066628001	6		25	1"	4,7
05066630001	8		25	1"	6,0
05066632001	10		25	1"	6,0
05066633001		1/4"	25	1"	6,0



1/4" hexagon drive, suitable for
F 6.3 bit holders (series 4)

871/4 DC TORQ-SET® Mplus bits



Application: TORQ-SET® screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Mplus for higher breaking torque and longer service life,
diamond-coated for secure screw fit

	 mm	 mm	 mm	 mm
05324901001	2	50	2"	
05066688001	4	50	2"	
05066690001	6	50	2"	
05066692001	8	50	2"	
05066694001	10	50	2"	
05066696001		1/4"	50	2"
05344515001		5/16"	50	2"

871/4 TORQ-SET® Mplus bits



Application: TORQ-SET® screws


Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Mplus for higher breaking torque and longer service life

	 mm	 mm	 mm	 mm
05066660001	2	50	2"	
05066683001	2	89	3 1/2"	
05066662001	3	50	2"	
05066684001	3	89	3 1/2"	
05066664001	4	50	2"	
05066685001	4	89	3 1/2"	
05066666001	5	50	2"	
05066668001	6	50	2"	
05066676001	6	70	2 3/4"	
05066686001	6	89	3 1/2"	
05066670001	8	50	2"	
05066678001	8	70	2 3/4"	
05066687001	8	89	3 1/2"	
05066672001	10	50	2"	
05066680001	10	70	2 3/4"	
05066682001	10	89	3 1/2"	
05066674001		1/4"	50	2"
05221110001		5/16"	50	2"

Tip

TORQ-SET® Mplus



Wera developed the Mplus profile with stronger flanks compared with tools with a conventional TORQ-SET® profile. This results in approximately 70 % extra torsional strength and greatly extends the service life of Wera Mplus tools.




Bits with diamond coating



The diamond coating of the DC bits lowers the danger of slipping as the minute diamond particles literally "bite" themselves into the screw head.





Bits for TORQ-SET® Screws



$\frac{5}{16}$ " hexagon drive, suitable for D 8 bit holders or direct drive (series 2)

871/2 TORQ-SET® Mplus bits



Application: TORQ-SET® screws

Drive: $\frac{5}{16}$ " hexagon, suitable for DIN ISO 1173-D 8 bit holders

Design: Mplus for higher breaking torque and longer service life, tough, for universal use

				
	mm		mm	
05066650001	8		32	1 $\frac{1}{4}$ "
05066652001	10		32	1 $\frac{1}{4}$ "
05066654001		$\frac{1}{4}$ "	32	1 $\frac{1}{4}$ "
05066656001		$\frac{5}{16}$ "	32	1 $\frac{1}{4}$ "
05066658001		$\frac{3}{8}$ "	32	1 $\frac{1}{4}$ "



$\frac{7}{16}$ " hexagon drive, suitable for F 11,2 bit holders or direct drive (series 7)

871/7 TORQ-SET® Mplus bits



Application: TORQ-SET® screws

Drive: $\frac{7}{16}$ " hexagon, suitable for power tools with DIN ISO 1173-F 11,2 chuck

Design: Mplus for higher breaking torque and longer service life

				
		mm		mm
05066740001	$\frac{1}{4}$ "	35	1 $\frac{3}{8}$ "	11,0
05066742001	$\frac{5}{16}$ "	35	1 $\frac{3}{8}$ "	11,0
05066744001	$\frac{3}{8}$ "	35	1 $\frac{3}{8}$ "	11,0
05066746001	$\frac{7}{16}$ "	35	1 $\frac{3}{8}$ "	11,0



$\frac{5}{16}$ " hexagon drive, suitable for F 8 bit holders or direct drive (series 6)

871/6 TORQ-SET® Mplus bits



Application: TORQ-SET® screws

Drive: $\frac{5}{16}$ " hexagon, suitable for DIN ISO 1173-F 8 bit holders

Design: Mplus for higher breaking torque and longer service life

					
	mm		mm		mm
05066700001	8		35	1 $\frac{3}{8}$ "	6,0
05066702001	10		35	1 $\frac{3}{8}$ "	6,0
05066704001		$\frac{1}{4}$ "	35	1 $\frac{3}{8}$ "	11,0



$\frac{5}{8}$ " direct drive hexagon (series 19)

871/19 TORQ-SET® Mplus bits



Application: TORQ-SET® screws

Drive: $\frac{5}{8}$ " hexagon

Design: Mplus for higher breaking torque and longer service life

			
		mm	
05066750001	$\frac{1}{2}$ "	40	1 $\frac{9}{16}$ "
05066752001	$\frac{9}{16}$ "	40	1 $\frac{9}{16}$ "
05066754001	$\frac{5}{8}$ "	40	1 $\frac{9}{16}$ "



Bits for TRI-WING® Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

875/1 TRI-WING® bits, 25 mm



Application: TRI-WING® screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Tough, for universal use

		mm		mm
05066758001	0	25	1"	4,7
05066760001	1	25	1"	4,7
05066762001	2	25	1"	4,7
05066764001	3	25	1"	4,7
05066766001	4	25	1"	6,2
05066768001	5	25	1"	6,2

875/1 TRI-WING® bits, 32 mm



Application: TRI-WING® screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Tough, for universal use

		mm		mm
05066770001	6	32	1 1/4"	11,0
05066772001	7	32	1 1/4"	11,0
05066774001	8	32	1 1/4"	12,5



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

875/4 TRI-WING® bits



Application: TRI-WING® screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Tough, for universal use

		mm	
05066785001	1	89	3 1/2"
05066786001	2	89	3 1/2"
05066787001	3	89	3 1/2"
05066788001	4	50	2"
05066788001	4	89	3 1/2"
05066782001	5	50	2"
05066784001	6	50	2"



5/16" hexagon drive, suitable for F 8 bit holders or direct drive (series 6)

875/6 TRI-WING® bits




Application: TRI-WING® screws

Drive: 5/16" hexagon, suitable for DIN ISO 1173-F 8 bit holders

Design: Tough, for universal use

		mm		mm
05066790001	6	35	1 3/8"	11,0
05066792001	7	35	1 3/8"	11,0
05066794001	8	35	1 3/8"	12,5





Bits for Multi-Point Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

860/1 XZN multi-point bits



Application: Multi-point socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Tough, for universal use

		 mm	 mm	 mm
05066150001	M 4	25	1"	4,17
05066155001	M 5	25	1"	5,14
05066160001	M 6	25	1"	-
05066165001	M 8	25	1"	8,0
05066170001	M 10	25	1"	10,0



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

860/4 XZN multi-point bits




Application: Multi-point socket screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Tough, for universal use

		 mm	 mm	 mm
05066175001	M 4	50	2"	4,17
05066180001	M 5	50	2"	5,14
05066185001	M 6	50	2"	-
05066190001	M 8	50	2"	8,0
05066195001	M 10	50	2"	10,0
05066200001	M 12	50	2"	12,0



Bits for Hi-TORQUE Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

800/1 HTN Hi-TORQUE bits



Application: Hi-TORQUE screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

		mm	
05055950001	1	32	1 1/4"
05055951001	2	32	1 1/4"
05055952001	3	32	1 1/4"
05055953001	4	32	1 1/4"

700 A HTS Hi-TORQUE bits



Application: For Hi-TORQUE screws

Drive: 1/4"-square drive socket

		mm	
05040030001	0	25	1"
05040031001	1	25	1"
05040032001	2	25	1"
05040033001	3	25	1"
05040034001	4	25	1"

700 B HTS Hi-TORQUE bits



Application: For Hi-TORQUE screws

Drive: 3/8"-square drive socket

		mm	
05040040001	3	25	1"
05040041001	4	25	1"
05040042001	5	32	1 1/4"
05040043001	6	32	1 1/4"

700 C HTS Hi-TORQUE bits



Application: For Hi-TORQUE screws

Drive: 1/2"-square drive socket

		mm	
05040045001	7	42	1 5/8"
05040046001	8	42	1 5/8"
05040047001	9	42	1 5/8"
05040048001	10	42	1 5/8"
05040049001	12	60	2 3/8"





Bits for Microstix Screws



4 mm 4 mm Halfmoon direct drive (series 9)

872/9 bits for Microstix screws



Application: Microstix socket screws

Drive: Halfmoon, 4 mm

Design: Precision hardened for sensitive applications

		 mm	 mm	 "
05066850001	m	44	2,0	1 ⁴⁷ / ₆₄
05066851001	00	44	2,0	1 ⁴⁷ / ₆₄
05066852001	F	44	2,0	1 ⁴⁷ / ₆₄
05066853001	0	44	2,0	1 ⁴⁷ / ₆₄
05066854001	1	44	2,0	1 ⁴⁷ / ₆₄



4 mm 4 mm HIOS direct drive (series 21)

872/21 bits for Microstix screws




Application: Microstix socket screws

Drive: HIOS 4 mm

Design: Precision hardened for sensitive applications

		 mm	 mm	 "
05066860001	m	40	2,0	1 ⁹ / ₁₆
05066861001	00	40	2,0	1 ⁹ / ₁₆
05066862001	F	40	2,0	1 ⁹ / ₁₆
05066863001	0	40	2,0	1 ⁹ / ₁₆
05066864001	1	40	2,0	1 ⁹ / ₁₆



Bits for Tamper-Proof Five Lobe Screws



4 mm 4 mm Halfmoon direct drive (series 9)


873/9 Five Lobe bits



Application: Five Lobe screws
Drive: Halfmoon, 4 mm
Design: Tough, for universal use

		 mm	 mm	 mm
05060380001	# 1	44	1 ⁴⁷ / ₆₄ "	1,8





Bits for Five Lobe Screws With Safety Pin



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

873/1 Five Lobe bits with bore hole



Application: Five Lobe screws with safety pin

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Tough, for universal use

		 mm	
05066601001	10	25	1"
05066602001	15	25	1"
05066603001	20	25	1"
05066604001	25	25	1"
05066605001	27	25	1"
05066606001	30	25	1"
05066607001	40	35	1 3/8"



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

873/4 Five Lobe bits with bore hole




Application: Five Lobe screws with safety pin

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Tough, for universal use

		 mm	 mm	 mm
05066610001	10	89	3 1/2"	4,0
05066611001	15	89	3 1/2"	4,0
05066612001	20	89	3 1/2"	4,5
05066613001	25	89	3 1/2"	6,0
05066614001	27	89	3 1/2"	6,0
05066615001	30	89	3 1/2"	6,0





Bits for Spanner Screws



1/4" hexagon drive, suitable for D 6.3 bit holders (series 1)

857/1 Z spanner bits



Application: Spanner screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6.3 bit holders

Design: Tough, for universal use

		 mm	 mm	 mm
05057150001	4	25	1"	3,18
05057151001	6	25	1"	4,32
05057152001	8	25	1"	5,21
05057153001	10	25	1"	6,10



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

857/4 Z spanner bits




Application: Spanner screws

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Tough, for universal use

		 mm	 mm	 mm
05057160001	4	89	3 1/2"	3,18
05057161001	6	89	3 1/2"	4,32
05057162001	8	89	3 1/2"	5,21
05057163001	10	89	3 1/2"	6,10



Nutsetters



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

3869/4 Nutsetters, stainless



Application: Hexagon headed bolts, screws and nuts

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Non-magnetic, retaining spring, stainless steel for minimising rust

	mm	mm	mm	mm
05071222001	7,0		50,0	12,5
05071223001	8,0		50,0	14,0
05071224001	10,0		50,0	16,0
05071225001	13,0		50,0	19,5
05071228001		3/8"	50,0	16,0

869/4 Nutsetters




Application: Hexagon headed bolts, screws and nuts

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Non-magnetic

	mm	mm	mm	mm
05060400001	5,5		50,0	11,0
05060272001	5,5		65,0	9,5
05060401001	6,0		50,0	11,0
05060274001	6,0		65,0	11,0
05060402001	7,0		50,0	11,0
05060276001	7,0		65,0	11,0
05060403001	8,0		50,0	12,5
05060278001	8,0		65,0	12,5
05060404001	9,0		50,0	14,0
05060280001	9,0		65,0	14,0
05060405001	10,0		50,0	14,0
05060282001	10,0		65,0	14,0
05060406001	11,0		50,0	16,0
05060281001	11,0		65,0	16,0
05060407001	12,0		50,0	18,0
05060283001	12,0		65,0	17,0
05060408001	13,0		50,0	18,0
05060284001	13,0		65,0	19,0
05060409001		1/4"	50,0	11,0
05060286001		1/4"	65,0	11,0
05060410001		5/16"	50,0	12,5
05060290001		5/16"	65,0	12,5
05060411001		3/8"	50,0	14,0
05060288001		3/8"	65,0	14,0
05060412001		7/16"	50,0	16,0





Nutsetters



1/4" hexagon drive, suitable for direct drive DIN ISO 1173-F 6,3 machine chucks (series 4)

869/4 M nutsetters, magnetic



Application: Hexagon headed bolts, screws and nuts

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Strong permanent magnet

	mm	mm	mm	mm
05060420001	5,5	50,0	11,0	
05060210001	5,5	65,0	11,0	
05060421001	6,0	50,0	11,0	
05060215001	6,0	65,0	11,0	
05060422001	7,0	50,0	11,0	
05060220001	7,0	65,0	11,0	
05060423001	8,0	50,0	12,5	
05060225001	8,0	65,0	12,5	
05060424001	9,0	50,0	14,0	
05060230001	9,0	65,0	14,0	
05060425001	10,0	50,0	14,0	
05060235001	10,0	65,0	14,0	
05060426001	11,0	50,0	16,0	
05060237001	11,0	65,0	16,0	
05060427001	12,0	50,0	18,0	
05060238001	12,0	65,0	17,0	
05060428001	13,0	50,0	18,0	
05060240001	13,0	65,0	19,0	
05060429001	1/4"	50,0	11,0	
05060255001	1/4"	65,0	11,0	
05060430001	5/16"	50,0	12,5	
05060260001	5/16"	65,0	12,5	
05060431001	3/8"	50,0	14,0	
05060265001	3/8"	65,0	14,0	
05060432001	7/16"	50,0	16,0	

869/4 M SB nutsetters, magnetic

	mm	mm	mm	mm
05073500001	1 x 5.5x50.0	105691		
05073501001	1 x 6.0x50.0	105707		
05073502001	1 x 7.0x50.0	106506		
05073503001	1 x 8.0x50.0	105714		
05073504001	1 x 9.0x50.0	105721		
05073505001	1 x 10.0x50.0	105738		
05073506001	1 x 11.0x50.0	105745		
05073507001	1 x 12.0x50.0	105752		
05073508001	1 x 13.0x50.0	105769		
05073509001	1 x 1/4"x50.0	105776		
05073510001	1 x 3/8"x50.0	105783		




869/4 M Set A SB



8 piece set, with strong permanent magnet, in practical pouch for the belt

	mm	mm	mm	mm
05073495001	869/4 M	1 x 7.0x50.0; 1 x 8.0x50.0; 1 x 10.0x50.0; 1 x 12.0x50.0; 1 x 13.0x50.0; 1 x 1/4"x50.0; 1 x 5/16"x50.0; 1 x 3/8"x50.0	144584	



Internal Thread Insertion Tool



1/4" hexagon drive, suitable for F 6.3 bit holders (series 4)

879/4 Internal thread insertion tool



Application: Hanger bolts and threaded rods

Drive: 1/4" hexagon, suitable for DIN ISO 1173-F 6.3 bit holders

Design: Internal thread

		mm		mm
05135902001	M6	50,0	2"	8,0
05135903001	M8	50,0	2"	12,0
05135904001	M10	50,0	2"	12,0







Impaktor Bit Holders

358



Rapidaptor Bit Holders

362



BiTorsion Bit Holders
Quick-Release Chuck

368



Universal Bit Holders with
Quick-Release Chuck

369



Universal Bit Holders with
Retaining Ring

371



Universal Bit Holders with
Stainless Steel Sleeve

372



Universal Bit Holders with Copper
Beryllium Sleeve

374



Bit Holders with adjustable
depth-control stop

375



Adaptors

376



Bit Holders and Adaptors

We were not happy that bit change with bit holders was often quite cumbersome. We found out that strong magnets or retaining rings indeed hold the bit securely, but they greatly impede removal from the holder.

So we have developed bit holders that indeed reliably hold the bit, yet still allow for fast and trouble-free bit change. The solution: bit holders with quick-release mechanisms that lift the bit from the magnets. Bit holders which – depending on the requirements – additionally have elastic zones that absorb peak loads. Or rapid-spin sleeves with which the cordless or electric screwdrivers can be guided during the screwdriving process.

Impaktor holder

Suitable for extra high torque e.g. from modern 18 volt impact screwdrivers with particularly high resilience. Reduces the risk of premature breakage of the holder or bit and increases the productivity when screwdriving with power tools.



Rapidaptor stainless steel

Manufactured out of stainless steel thus preventing the formation of unsightly extraneous rust when working with stainless steel. Additionally, it offers all the advantages of the Rapidaptor technology.



BiTorsion holder

Designed with special BiTorsion zone. The energy from peak loads is diverted into the BiTorsion zone. Considerable reduction of the risk of breakage, much longer service life.



Rapidaptor holder

Rapid bit change without needing any additional tools. One-hand operation with a freely spinning sleeve for simplified guidance of the tool. Also available in a BiTorsion design.



Ring magnet Rapidaptor

Special design powerful ring magnet, for larger and heavier screws. Ideal for overhead work, too.



Holder with quick-release chuck

The magnetic design enables simplified positioning of the screw. The non-magnetic version prevents any unwanted attraction of metal filings.



Universal holder with retaining ring
Proven holder design, optimal fitting of the tool in the holder. Particularly robust for series applications.



Copper-beryllium universal holder with retaining ring
Very strong design thus minimising wear and tear. Particularly suitable for screw-driving jobs with high torque or peak loads. Very high resistance to corrosion.



Universal holder with stainless steel sleeve
The retaining ring and the strong permanent magnet ensure a particularly secure fitting of the bit in the holder.



Impaktor Bits and Holders

Impaktor holder technology ensures an above-average service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry (two coupled torsion zones that perform successively).



The Impaktor stainless steel holder with a retaining ring and magnet satisfies the extreme, dynamic requirements in that there are consciously no small mechanical component parts fitted as they would be more susceptible to failure. It focuses on the basic bit holding function and the cushioning of the extreme impulse peaks with its two different torsion zones. Mainly used in industrial screw assembly applications e.g. with screwdriving robots.



The Impaktor holder with ring magnet additionally holds longer and heavier screws absolutely securely. This enables a speedy and dependable positioning of the screw. It is also ideal for above-head work. Should the magnet function not be required in a particular situation e.g. when working with metal, it can be extracted from the screwdriving area and can thereby be “disabled”. Mainly used in manual power tool applications.



The combination of the double torsion zones in the Impaktor holder and the torsion zone in the Impaktor bit result in the so-called TriTorsion system.



Wera Impaktor bits and holders can also be used individually. However, the best results are achieved with the combination of the two tools that are optimally matched to one another.



Impaktor Bit Holders

For an above-average service life

897/4 IMP Impaktor holder with retaining ring and magnet



Impaktor holder to cushion extreme impulse peaks, special torsion effect from the double-torsion spring, equipped with a retaining ring for a secure fit of the bits in the holder, holder out of stainless steel, fitted with magnet for a secure positioning of the bit and screw.

Output: Suitable for bits with 1/4" hexagon head drive as per DIN ISO 1173 C 6,3 and Wera Series 1

Design: The Impaktor technology ensures an above-average service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry (two coupled torsion zones that perform successively), fitted with strong retaining ring and magnet

Drive: 1/4" hexagon, suitable for power driven screwdrivers with DIN ISO 1173 F 6,3 chucks

	mm			
05057675001	1/4"	75	3"	1/4"

897/4 IMP R Impaktor holder with retaining ring and ring magnet



Impaktor holder to cushion extreme impulse peaks, special torsion effect from the double-torsion spring, equipped with a ring magnet to easily hold longer and heavier screws, also ideal for above-head work, particularly suitable for use with impact drivers, the magnet can be retracted and in this way be disabled

Output: Suitable for bits with 1/4" hexagon head drive as per DIN ISO 1173 C 6,3 and Wera Series 1

Design: The Impaktor technology ensures an above-average service life even under extreme conditions thanks to a best-possible utilisation of the material properties and optimally designed geometry (two coupled torsion zones that perform successively), fitted with retaining ring and ring magnet

Drive: 1/4" hexagon, suitable for power driven screwdrivers with DIN ISO 1173 F 6,3 chucks

	mm			
05057676001	1/4"	75	3"	1/4"

897/4 IMP R SB Impaktor holder with retaining ring and ring magnet

05073990001	1 x 1/4"x75	4013288 157836





Rapidaptor Bit Holders

Wera developed the Rapidaptor that allows rapid bit change without any extra tools with only one hand.



Chuck-all

The Rapidaptor quick-release chucks hold both 1/4" bits as per DIN ISO 1173 C 6,3 (Wera series 1) and E 6,3 (Wera series 4).



Single-hand

All functions of the quick-release chuck such as the inserting or releasing of bits can be done with just one hand. That is faster, more economic and ergonomic. There are no unnecessary manoeuvres.



Rapid-in and self-lock

The bit can be pushed into the chuck without moving the sleeve. It automatically locks with a secure and wobble-free fit as soon as the bit is applied to the screw.



Rapid-out

Simply push the sleeve forward to change the bit. The spring mechanism lifts the bit off the magnet and unlocks the tool. The bit can be easily removed. Particularly helpful: even the smallest bits can be removed without any extra tools.



Rapid-spin

The free-turning sleeve allows screw steadying at the start of the screwdriving process. This makes it easier to apply the tool to the screw and prevents slipping. It can also be used as a short extension for 1/4" applications e.g. in combination with the Wera Zyklop Ratchets.



Rapidaptor with ring magnet

The floating, free-turning magnetic sleeve securely holds even large and heavy screws to enable immediate application. There is no need to hold the screw when applying the tool – something which can be dangerous and painful. Also ideal for overhead work.



Rapidaptor Bit Holders

For rapid bit changes

3888/4/1 K Rapidaptor universal bit holder, stainless



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand Technology; stainless steel for minimising rust

Drive: 1/4" hexagon, suitable for power tools with DIN ISO 1173 F 6,3 chuck

	mm	mm	mm	mm	mm
05071100001	1/4"	50	2"	1/4"	15,0

897/4 R Rapidaptor BiTorsion Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: BiTorsion for long service life, Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all, and single-hand technology

Drive: 1/4" hexagon suitable for power tools with DIN ISO 1173 F 6,3 receiver

	mm	mm	mm	mm	mm
05053923001	1/4"	75	3"	1/4"	15,0

897/4 R SB Rapidaptor BiTorsion Universal Bit Holder

	mm	mm	mm	mm	mm
05073616001	1 x 1/4"x50	4013288	112170		



	mm	mm	mm	mm	mm
05073420001	1 x 1/4"x75	4013288	099464		



889/4/1 K Rapidaptor Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all, and single-hand technology, with strong permanent magnet

Drive: 1/4" hexagon suitable for power tools with DIN ISO 1173 F 6,3 receiver

					
	mm	mm	mm	mm	mm
05052502001	1/4"	50	2"	1/4"	15,0

889/4/1 K SB Rapidaptor Universal Bit Holder

		
05073421001	1 x 1/4"x50	4013288
		099440



Tip



BiTorsion Rapidaptor



BiTorsion holders from Wera have a torsion spring design that absorbs smaller peak loads during screw-driving. The combined use with BiTorsion bits with their torsion zone distinctly extends the service life of the tool. Conveniently, BiTorsion holders from Wera can also be used with conventional bits.



Rapidaptor holder out of stainless steel



Manufactured out of stainless steel thus preventing the formation of unsightly extraneous rust when working with stainless steel. Additionally, it offers all the advantages of the Rapidaptor technology.

Rapidaptor Bit Holders

For rapid bit changes

889/4/1 Rapidaptor Universal Bit Holder



Application: Suitable for $\frac{1}{4}$ " DIN ISO 1173 C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor easy-in, easy-out, rapid-spin, chuck-all, and single-hand technology, with strong permanent magnet

Drive: $\frac{1}{4}$ " hexagon suitable for power tools with DIN ISO 1173 F 6,3 receiver

					
	$\frac{1}{4}$ "	mm	mm	$\frac{1}{4}$ "	mm
05052503001	$\frac{1}{4}$ "	75	3"	$\frac{1}{4}$ "	15,0

888/4/1 K Rapidaptor Universal Bit Holder



Application: Suitable for $\frac{1}{4}$ " DIN ISO 1173 C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor easy-in, easy-out, rapid-spin, chuck-all, and single-hand technology

Drive: $\frac{1}{4}$ " hexagon suitable for power tools with DIN ISO 1173 F 6,3 receiver

					
	$\frac{1}{4}$ "	mm	mm	$\frac{1}{4}$ "	mm
05052500001	$\frac{1}{4}$ "	50	2"	$\frac{1}{4}$ "	15,0

889/4 R Rapidaptor Universal Bit Holder



Application: Suitable for $\frac{1}{4}$ " DIN ISO 1173 C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Drive: $\frac{1}{4}$ " hexagon suitable for power tools with DIN ISO 1173 F 6,3 receiver

Design: $\frac{1}{4}$ " hexagon with Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all, and single-hand technology, magnetic

					
	$\frac{1}{4}$ "	mm	mm	$\frac{1}{4}$ "	mm
05052504001	$\frac{1}{4}$ "	100	4"	$\frac{1}{4}$ "	15,0

887/4 RR Rapidaptor Universal Bit Holder with ring magnet



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all, and single-hand technology, with ring magnet and stop sleeve for secure screwdriving on the holder

Drive: 1/4" hexagon suitable for power tools with DIN ISO 1173 F 6,3 receiver

	mm	mm	mm	mm	mm
05052490001	1/4"	57	2 1/4"	1/4"	16
05160987001	1/4"	89	3 1/2"	1/4"	16
05160988001	1/4"	152	6"	1/4"	16

887/4 RR SB RR Rapidaptor Universal Bit Holder with ring magnet


05073511001	4013288
1 x 1/4"x57	105790




Tip



Rapidaptor ring magnet



The floating, free-turning sleeve on the Rapidaptor with powerful ring magnet securely holds even large and heavy screws.



There is no need to hold the screw when applying the tool – something which can be dangerous and painful!

BiTorsion Quick-Release Chuck Holders

Adaptor for hexagon to square drive

797 A/4/1 B BiTorsion Bit Holder



Application: Suitable for $\frac{1}{4}$ " DIN ISO 1173 C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: BiTorsion for long service life, with strong permanent magnet

Drive: $\frac{1}{4}$ "-female square socket for use with ratchet or power tool

		mm			mm
05048681001	$\frac{1}{4}$ "	77	3"	$\frac{1}{4}$ "	14,0

797 B/4/1 B BiTorsion Bit Holder



Application: Suitable for $\frac{1}{4}$ " DIN ISO 1173 C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: BiTorsion for long service life, with strong permanent magnet

Drive: $\frac{3}{8}$ "-female square socket for use with ratchet or power tool

		mm			mm
05048680001	$\frac{1}{4}$ "	82	$3 \frac{1}{4}$ "	$\frac{3}{8}$ "	14,0

Universal Bit Holders with Quick-Release Chuck

Secure hold and rapid bit changes

894/4/1 K Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 hexagon insert bits and Wera Series 1

Design: With quick-release chuck

Drive: 1/4" hexagon, suitable for power tools with DIN ISO 1173 F 6,3 receiver

					
	mm	mm	mm	mm	mm
05053522001	1/4"	51	2"	1/4"	14,3

894/4/1 Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 hexagon insert bits and Wera Series 1

Design: With quick-release chuck

Drive: 1/4" hexagon, suitable for power tools with DIN ISO 1173 F 6,3 receiver

					
	mm	mm	mm	mm	mm
05053520001	1/4"	75	3"	1/4"	14,3

894/14/1 Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 hexagon insert bits and Wera Series 1

Design: With quick-release chuck

Drive: SDS plus

				
	mm	mm	mm	mm
05053560001	1/4"	75	3"	14,3

895/4/1 K Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 hexagon insert bits and Wera Series 1

Design: With strong permanent magnet and quick-release chuck

Drive: 1/4" hexagon, suitable for power tools with DIN ISO 1173 F 6,3 receiver

					
	mm	mm	mm	mm	mm
05053872001	1/4"	52	2"	1/4"	14,3

895/4/1 K SB Universal Bit Holder

			
	mm	mm	mm
05073318001	1 x 1/4"x52	4013288	029195



Universal Bit Holder with Quick-Release Chuck

Secure hold and rapid bit changes

895/4/1 Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1

Design: With strong permanent magnet and quick-release chuck

Drive: 1/4" hexagon, suitable for power tools with DIN ISO 1173 F 6,3 receiver

	mm	mm	mm	mm	mm
05053870001	1/4"	77	3"	1/4"	14,3

898/4 Combination Bit Holder



Application: Suitable for bits with 4 mm Halfmoon drive (and Wera Serie 9) and 4 mm HIOS drive (and Wera Series 21)

Design: With quick-release chuck

Drive: 1/4" hexagon, suitable for power tools with DIN ISO 1173 F 6,3 receiver

	mm	mm	mm	mm
05051500001	50	2"	1/4"	10,0

898/9 Combination Bit Holder



Application: Suitable for bits with 4 mm Halfmoon drive (and Wera Serie 9) and 4 mm HIOS drive (and Wera Series 21)

Design: With quick-release chuck

Drive: Halfmoon, 4 mm

	mm	mm	mm
05051501001	50	2"	10,0

895/14/1 Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1

Design: With strong permanent magnet and quick-release chuck

Drive: SDS plus

	mm	mm	mm	mm
05053920001	1/4"	81	3 1/8"	14,3

898/21 Combination Bit Holder



Application: Suitable for bits with 4 mm Halfmoon drive (and Wera Serie 9) and 4 mm HIOS drive (and Wera Series 21)

Design: With quick-release chuck

Drive: HIOS 4 mm

	mm	mm	mm
05051502001	50	2"	10,0

Universal Bit Holder with Retaining Ring

Proven, secure hold in series manufacturing applications

890/00/0 Universal Bit Holder



Application: Suitable for 4 mm DIN ISO 1173 C 4 bits

Design: With retaining ring

Drive: 3 mm hexagon, suitable for power tools with DIN ISO 1173 B 3 receiver

	mm	mm	mm	mm	mm
05052505001	4	57	2 1/4"	3	6,3

890/7/1 Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1

Design: With retaining ring

Drive: 7/16" hexagon, suitable for power tools with DIN ISO 1173 F 11,2 receiver

	mm	mm	mm	mm	mm
05052655001	1/4"	65	2 1/2"	7/16"	11,1

890/4/1 Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1

Design: With retaining ring

Drive: 1/4" hexagon, suitable for power tools with DIN ISO 1173 F 6,3 receiver

	mm	mm	mm	mm	mm
05052575001	1/4"	57	2 1/4"	1/4"	11,1

890/7/2 Universal Bit Holder



Application: Suitable for 5/16" DIN ISO 1173 C 8 hexagon insert bits and Wera Series 2

Design: With retaining ring

Drive: 7/16" hexagon, suitable for power tools with DIN ISO 1173 F 11,2 receiver

	mm	mm	mm	mm	mm
05052725001	5/16"	65	2 1/2"	7/16"	14,3

890/6/1 Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1

Design: With retaining ring

Drive: 5/16" hexagon, suitable for power tools with DIN ISO 1173 F 8 receiver

	mm	mm	mm	mm	mm
05052625001	1/4"	65	2 1/2"	5/16"	11,1



Universal Bit Holders with Stainless Steel Sleeve

Strong magnet for secure hold

893/4/1 K Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1

Design: With stainless steel sleeve and strong permanent magnet

Drive: 1/4" hexagon, suitable for power tools with DIN ISO 1173 F 6,3 receiver

					
	mm	mm	mm	mm	mm
05134480001	1/4"	50	2"	1/4"	10,5

899/3/1 Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1

Design: With stainless steel sleeve, retaining ring, and strong permanent magnet

Drive: 5.5 mm hexagon, suitable for power tools with DIN ISO 1173 B 5,5 receiver

					
	mm	mm	mm	mm	mm
05053425001	1/4"	72	2 3/4"	5,5	10,5

893/4/1 K SB Universal Bit Holder

	
05073401001	4013288
1 x 1/4"x50	029133



899/4/1 Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1

Design: With stainless steel sleeve, retaining ring, and strong permanent magnet

Drive: 1/4" hexagon, suitable for power tools with DIN ISO 1173 F 6,3 receiver

	Art.No.					
		mm	mm	mm	mm	mm
05053457001	899/4/1 K	1/4"	50	2"	1/4"	10,5
05053455001	899/4/1 75	1/4"	75	3"	1/4"	10,5
05053459001	899/4/1 100	1/4"	100	4"	1/4"	10,5
05053458001	899/4/1 152	1/4"	152	6"	1/4"	10,5

899/4/1 SB Universal Bit Holder

	
05347100001	4013288
1 x 899/4/1 K 50	095268
1/4"x50	
05073357001	029720
1 x 899/4/1 75	
1/4"x75	
05134398001	099907
1 x 899/4/1 152	
1/4"x152	



899/4/1 S Universal Bit Holder with strong retaining ring



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1

Design: With stainless steel sleeve, strong retaining ring, and strong permanent magnet

Drive: 1/4" hexagon, suitable for power tools with DIN ISO 1173 F 6,3 receiver

					
	mm	mm	mm	mm	mm
05160976001	1/4"	50	2"	1/4"	10,5
05160924001	1/4"	75	3"	1/4"	10,5
05160977001	1/4"	100	4"	1/4"	10,5
05160979001	1/4"	200	8"	1/4"	10,5
05160981001	1/4"	300	12"	1/4"	10,5

899/8/1 Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1

Design: With stainless steel sleeve, retaining ring, and strong permanent magnet

Drive: 7 mm, suitable for power tools with DIN ISO 1173 H 7 receiver

					
	mm	mm	mm	mm	mm
05053475001	1/4"	75	3"	7	10,5

899/5/1 Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1

Design: With stainless steel sleeve, retaining ring, and strong permanent magnet

Drive: 5/16" hexagon

					
	mm	mm	mm	mm	mm
05053460001	1/4"	45	1 3/4"	5/16"	10,5

899/8/1 K Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1

Design: With stainless steel sleeve, retaining ring, and strong permanent magnet

Drive: 7 mm, suitable for power tools with DIN ISO 1173 H 7 receiver

					
	mm	mm	mm	mm	mm
05053480001	1/4"	55	2 3/16"	7	10,5

899/14/1 Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1

Design: With stainless steel sleeve, retaining ring, and strong permanent magnet

Drive: SDS plus

				
	mm	mm	mm	mm
05053485001	1/4"	79	3 1/8"	10,5

899/14/1 SB Universal Bit Holder

		
	mm	mm
05134397001	1 x 1/4"x79	099891



Universal Bit Holders with Copper Beryllium Sleeve

Very high torque model

891/4/1 Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1

Design: With CuBe sleeve, retaining ring, and strong permanent magnet

Drive: 1/4" hexagon, suitable for power tools with DIN ISO 1173 F 6,3 receiver

		mm			mm
05053175001	1/4"	75	3"	1/4"	10,5

891/8/1 Universal Bit Holder



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1

Design: With CuBe sleeve, retaining ring, and strong permanent magnet

Drive: 7 mm, suitable for power tools with DIN ISO 1173 H 7 receiver

		mm		mm	mm
05053275001	1/4"	75	3"	7	10,5

Bit Holder with adjustable depth-control stop

With infinite adjustment feature


896/4/1 SB Bit Holder with adjustable depth-control stop



- Application:** Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1
- Design:** High quality aluminium spacers with infinite adjustment feature
- Drive:** 1/4" hexagon, suitable for power tools with DIN ISO 1173 F 6,3 receiver

		
05073210001	896/4/1	4013288
	1 x 1/4"x50	178725

Tip



Bit holder with adjustable depth stop



The screw installation depth can be infinitely adjusted and allows the desired degree of countersinking of the screws.



Adaptors

870/1 Adaptor



Application: Nut spinner sockets
Drive: 1/4" external hexagon
Output: 1/4" external square

				
		mm		
05136000001 ¹⁾	1/4"	25	1"	1/4"

¹⁾ With friction ball; for manual nut spinner sockets

870/2 Adaptor



Application: Nut spinner sockets
Drive: External hexagon
Output: External square

				
		mm		
05136001001 ¹⁾	3/8"	30	1 3/16"	5/16"
05136002001 ¹⁾	1/2"	35	1 3/8"	5/16"

¹⁾ With friction ball; for manual nut spinner sockets

870/4 Adaptors



Application: Manual nut spinner sockets
Drive: 1/4" hexagon
Output: 1/4" external square

				
		mm		
05311517001 ¹⁾	1/4"	50	2"	1/4"

¹⁾ With friction ball; for manual nut spinner sockets

870/4 SB

		
05134399001 ¹⁾	OO 1 x 1/4"x50	4013288 099914

¹⁾ With friction ball; for manual nut spinner sockets



870/4/7 Set A SB



Application: Machine-operated nut spinner sockets

Design: With external square drive

Drive: $\frac{1}{4}$ " hexagon, suitable for power tools with DIN ISO 1173 F 6,3 receiver; $\frac{7}{16}$ " hexagon, suitable for power tools with DIN ISO 1173 F 11,2 receiver

05073200001	
870/4	1 x $\frac{1}{4}$ "x50; 1 x $\frac{3}{8}$ "x50
870/7	1 x $\frac{1}{2}$ "x75

870/4 Adaptors



Application: Machine-operated nut spinner sockets

Design: With external square drive

Drive: $\frac{1}{4}$ " hexagon, suitable for power tools with DIN ISO 1173 F 6,3 receiver

		mm		
05050205001	$\frac{1}{4}$ "	50	2"	$\frac{1}{4}$ "
05050210001	$\frac{1}{4}$ "	100	4"	$\frac{1}{4}$ "
05050215001	$\frac{3}{8}$ "	50	2"	$\frac{1}{4}$ "
05050220001	$\frac{3}{8}$ "	100	4"	$\frac{1}{4}$ "

870/14 Adaptors



Application: Machine-operated nut spinner sockets

Design: With external square drive

Drive: SDS plus

		mm	
05050650001	$\frac{1}{4}$ "	70	$2\frac{3}{4}$ "

870/7 Adaptors



Application: Machine-operated nut spinner sockets

Design: With external square drive

Drive: $\frac{7}{16}$ " hexagon, suitable for power tools with DIN ISO 1173 F 11,2 receiver

		mm		
05050510001	$\frac{1}{2}$ "	75	3"	$\frac{7}{16}$ "



Adaptors

784 A 1/4" Adaptor with quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 hexagon insert bits and Wera Series 1

Design: With Wera quick-release chuck

Drive: 1/4" female square

	Art.No.				
05042750001	784 A/1	1/4"	30	1 3/16"	1/4"

780 A 1/4" Adaptor



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 and 5/16" DIN ISO 1173 C 8 hexagon insert bits and Wera Series 1 and 2

Drive: 1/4" female square

	Art.No.				
05042605001	780 A/1	1/4"	25	1"	1/4"

784 B 3/8" Adaptors with quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 and 5/16" DIN ISO 1173 C 8 hexagon insert bits and Wera Series 1 and 2

Design: With Wera quick-release chuck

Drive: 3/8" female square

	Art.No.				
05042755001	784 B/1	1/4"	43	1 5/8"	3/8"
05042765001	784 B/2	5/16"	50	2"	3/8"

780 B 3/8" Adaptors



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 and 5/16" DIN ISO 1173 C 8 hexagon insert bits and Wera Series 1 and 2

Drive: 3/8" female square

	Art.No.				
05042655001	780 B/1	1/4"	30	1 3/16"	3/8"
05344511001 ¹⁾	780 B/1-S	1/4"	30	1 3/16"	3/8"
05042665001	780 B/2	5/16"	30	1 3/16"	3/8"
05344512001 ¹⁾	780 B/2-S	5/16"	30	1 3/16"	3/8"

¹⁾ S = extra strong

784 C 1/2" Adaptors with quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173 C 6,3 and 5/16" DIN ISO 1173 C 8 hexagon insert bits and Wera Series 1 and 2

Design: With Wera quick-release chuck

Drive: 1/2" female square

	Art.No.				
05042760001	784 C/1	1/4"	50	2"	1/2"
05042768001	784 C/2	5/16"	50	2"	1/2"

780 C 1/2" Adaptors



Application: Suitable for 1/4" DIN ISO 1173 C 6,3, 5/16" DIN ISO 1173 C 8, 7/16" DIN ISO 1173 E 11,2, 5/8" hexagon insert bits and Wera Series 1, 2, 6, 7 and 19

Drive: 1/2" female square

	Art.No.				
05042705001	780 C/1	1/4"	35	1 3/8"	1/2"
05344513001	780 C/1-S	1/4"	35	1 3/8"	1/2"
05042715001	780 C/2	5/16"	35	1 3/8"	1/2"
05344514001	780 C/2-S	5/16"	35	1 3/8"	1/2"





Bit Sets

	Bit-Checks Impaktor	384
	Bit-Checks Stainless	388
	Bit-Checks / Bit-Safes BiTorsion	390
	Bit-Checks Diamond	394
	Bit-Checks / Bit-Safes Universal	398
	Bit-Checks Wood	408
	Bit-Checks Metal	410
	Bit Sets For Special Applications	411



Bit Ranges

We have had bit ranges in our programme for many years now. In 2016, we put a question mark against everything and came up with a game changer.

We wanted bit ranges with bits whose profiles and sizes could be more easily recognised. We wanted bit ranges that were as compact as possible and which were Wera-like at a first glance. We wanted bit ranges with bits that could be removed and reinserted more easily. We wanted bit ranges with as little weight as possible. The new multi-component Bit-Checks satisfy these requirements; the soft material in the lower section of the Bit-Checks ensures that the bits are firmly held yet easy to remove.



The bit ranges comprise sets of between 6 and 61 pieces. They offer the right tool set for every user.



The Bit-Checks by Wera are extremely compact and are therefore the ideal companion for mobile applications.



The Bit-Checks can be positioned upright at the workplace so the tool is always quickly to hand.



The “Take it easy” Bit-Checks have bits with a sleeve which – from its colour (e.g. red = Phillips) and size designation - make it simple to access the right bit quickly.



The new Bit-Safes provide users with comprehensive bit and holder ranges in a surface-protecting, compact textile box.



Bit-Checks Impaktor

For an above-average service life

Bit-Check 30 Impaktor 1



1 Impaktor holder with retaining ring and ring magnet in the chuck for a secure fit of the bits in the holder, 29 Impaktor bits.

05057690001	
897/4	1 x 1/4"x75
Impaktor R	
851/1 IMP DC	2 x PH 1x25; 3 x PH 2x25; 2 x PH 3x25
855/1 IMP DC	2 x PZ 1x25; 3 x PZ 2x25; 2 x PZ 3x25
867/1 IMP DC	1 x TX 10x25; 1 x TX 15x25; 2 x TX 20x25; 3 x TX 25x25; 2 x TX 30x25; 2 x TX 40x25
840/1 IMP DC	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25

Bit-Check 10 Impaktor 1



1 Impaktor holder with retaining ring and ring magnet in the chuck for a secure fit of the bits in the holder, 9 Impaktor bits.

05057680001	
897/4	1 x 1/4"x75
Impaktor R	
851/1 IMP DC	1 x PH 2x25; 1 x PH 3x25
855/1 IMP DC	1 x PZ 2x25; 1 x PZ 3x25
867/1 IMP DC	1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25
840/1 IMP DC	1 x 4,0x25; 1 x 5,0x25

Bit-Check 10 Impaktor 2



1 Impaktor holder with retaining ring and ring magnet in the chuck for a secure fit of the bits in the holder, 9 Impaktor bits.

05057682001	
897/4	1 x 1/4"x75
Impaktor R	
851/1 IMP DC	3 x PH 2x25; 1 x PH 3x25
867/1 IMP DC	3 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25

Bit-Check 10 Impaktor 1 SB

05073980001	4013288 158574
897/4 Impaktor R	1 x 1/4"x75
851/1 IMP DC	1 x PH 2x25; 1 x PH 3x25
855/1 IMP DC	1 x PZ 2x25; 1 x PZ 3x25
867/1 IMP DC	1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25
840/1 IMP DC	1 x 4,0x25; 1 x 5,0x25



Bit-Check 10 Impaktor 3



1 Impaktor holder with retaining ring and ring magnet in the chuck for a secure fit of the bits in the holder, 9 Impaktor bits.

05057683001	
897/4	1 x 1/4"x75
Impaktor R	
855/1 IMP DC	3 x PZ 2x25; 1 x PZ 3x25
867/1 IMP DC	3 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25

Bit-Check 10 Impaktor 4



1 Impaktor holder with retaining ring and magnet in the chuck for a secure fit of the bits in the holder, 9 Impaktor bits.

05057417001	
●○	897/4 1 x 1/4"x75 Impaktor
+	855/1 IMP DC 3 x PZ 2x25; 1 x PZ 3x25
+	867/1 IMP DC 2 x TX 20x25; 2 x TX 25x25; 1 x TX 30x25

Bit-Check 10 PZ Impaktor 1



1 Impaktor holder with retaining ring and ring magnet in the chuck for a secure fit of the bits in the holder, 9 Impaktor bits.

05057684001	
●○	897/4 1 x 1/4"x75 Impaktor R
+	855/1 IMP DC 7 x PZ 2x25; 2 x PZ 3x25

Bit-Check 10 TX Impaktor 1



1 Impaktor holder with retaining ring and ring magnet in the chuck for a secure fit of the bits in the holder, 9 Impaktor bits.

05057688001	
●○	897/4 1 x 1/4"x75 Impaktor R
+	867/1 IMP DC 3 x TX 20x25; 3 x TX 25x25; 2 x TX 30x25; 1 x TX 40x25

Tip



Impaktor-Bits



Impact-Bits are needed when a strong power tool (e.g. 18 volt impact screwdriver) is used. Impact bits were specifically developed to withstand high power tool forces.

The Impaktor stainless steel holder with a retaining ring and magnet



The Impaktor stainless steel holder with a retaining ring and magnet satisfies the extreme, dynamic requirements in that there are consciously no small mechanical component parts fitted as they would be more susceptible to failure. It focuses on the basic bit holding function and the cushioning of the extreme impulse peaks with

its two different torsion zones. Mainly used in industrial screw assembly applications e.g. with screwdriving robots.

The Impaktor holder with ring magnet



The Impaktor holder with ring magnet additionally holds longer and heavier screws absolutely securely. This enables a speedy and dependable positioning of the screw. It is also ideal for above-head work. Should the magnet function not be required in a particular situation e.g. when working with metal, it can be extracted from the

screwdriving area and can thereby be "disabled". Mainly used in manual power tool applications.



Bit-Checks Impaktor

For an above-average service life

Bit-Check 6 Impaktor 1



6 Impaktor bits.

05057695001	
+	851/4 IMP DC 1 x PH 2x50; 1 x PH 3x50
+	855/4 IMP DC 1 x PZ 2x50; 1 x PZ 3x50
+	867/4 IMP DC 1 x TX 25x50; 1 x TX 30x50

Bit-Check 6 PH Impaktor 1



6 Impaktor bits.

05057691001	
+	851/4 IMP DC 4 x PH 2x50; 2 x PH 3x50

Bit-Check 6 Impaktor 1 SB

		4013288
05073890001		158635
+	851/4 IMP DC	
	1 x PH 2x50; 1 x PH 3x50	
+	855/4 IMP DC	
	1 x PZ 2x50; 1 x PZ 3x50	
+	867/4 IMP DC	
	1 x TX 25x50; 1 x TX 30x50	



” To learn more about this product, scan the QR code. “

Bit-Check 6 PZ Impaktor 1



6 Impaktor bits.

05057692001	
+	855/4 IMP DC 4 x PZ 2x50; 2 x PZ 3x50

Bit-Check 6 TX Impaktor 1



6 Impaktor bits.

05057693001	
+	867/4 IMP DC 2 x TX 20x50; 2 x TX 25x50; 1 x TX 30x50; 1 x TX 40x50



Bit-Checks Stainless

Keep rust at bay

Bit-Check 30 Stainless 1



1 Rapidaptor stainless steel bit holder with quick-release chuck, 29 stainless steel bits.

05071109001	
●○	3888/4/1 K 1 x 1/4"x50
+	3851/1 TS PH 1 x PH 1x25; 3 x PH 2x25; 1 x PH 3x25
+	3855/1 TS PZ 2 x PZ 1x25; 3 x PZ 2x25; 1 x PZ 3x25
+	3867/1 TS 2 x TX 10x25; 2 x TX 15x25; 3 x TX 20x25; 3 x TX 25x25; 2 x TX 30x25; 1 x TX 40x25
○	3840/1 TS 1 x 2,5x25; 1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 5,5x25

Bit-Check 10 Stainless 1



1 Rapidaptor stainless steel bit holder with quick-release chuck, 9 stainless steel bits.

05071110001	
●○	3888/4/1 K 1 x 1/4"x50
+	3851/1 TS PH 1 x PH 2x25
+	3855/1 TS PZ 1 x PZ 1x25; 2 x PZ 2x25
+	3867/1 TS 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25

Bit-Check 10 Stainless 1 SB

05073630001	4013288 112163
●○	3888/4/1 K 1 x 1/4"x50
+	3851/1 TS PH 1 x PH 2x25
+	3855/1 TS PZ 1 x PZ 1x25; 2 x PZ 2x25
+	3867/1 TS TORX® 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25



Bit-Check 12 Stainless 1



1 Rapidaptor stainless steel bit holder with quick-release chuck, 11 stainless steel bits.

05057425001	
●○	3888/4/1 K 1 x 1/4"x50
+	3851/1 TS PH 1 x PH 1x25; 1 x PH 2x25
+	3855/1 TS PZ 1 x PZ 1x25; 1 x PZ 2x25
+	3867/1 TS 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25
○	3840/1 TS 1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25

Bit-Check 6 Stainless 1 SB



6 stainless steel bits.

		
05073634001	3855/4  2 x PZ 2x50	164636
	3867/4 TORX®  1 x TX 20x50; 2 x TX 25x50	
	3840/4 Hex-Plus  1 x 5.5x50	

Tip



Stainless Steel Bits



The stainless steel tools from Wera are vacuum ice-hardened and have the hardness and strength needed for screw connections. There are no limitations to the industrial applications they are suitable for.



“Take it easy”



“Take it easy” tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.



Rapidaptor holder out of stainless steel




Manufactured out of stainless steel thus preventing the formation of unsightly extraneous rust when working with stainless steel. Additionally, it offers all the advantages of the Rapidaptor technology.



Bit-Checks / Bit-Safes BiTorsion

BiTorsion – Distinct extension of service life

Bit-Safe 61 BiTorsion 1



1 bit holder Rapidaptor with quick-release chuck, 49 BiTorsion bits for long service life, diamond-coated (BDC) for secure screw fit, tough (BTZ), for universal use, extra-hard (BTH), 11 bits, tough (Z), for universal use.

05057441001	
889/4/1 K	1 x 1/4"x50
851/1 BDC PH	1 x PH 1x25; 2 x PH 2x25; 1 x PH 3x25
851/1 BTZ PH	2 x PH 1x25; 8 x PH 2x25; 1 x PH 3x25
855/1 BDC PZ	1 x PZ 1x25; 2 x PZ 2x25; 1 x PZ 3x25
855/1 BTH PZ	2 x PZ 1x25; 8 x PZ 2x25; 1 x PZ 3x25
867/1 TORX®	3 x TX 10x25; 2 x TX 15x25; 4 x TX 20x25;
BTZ	4 x TX 25x25; 2 x TX 30x25; 1 x TX 40x25
800/1 BDC	1 x 0,8x5,5x25; 1 x 1,0x5,5x25; 1 x 1,2x6,5x25
840/1 Z	3 x 2,5x25; 3 x 3,0x25; 3 x 4,0x25; 2 x 5,0x25
Hex-Plus	

Bit-Check 30 BiTorsion 1



1 bit holder Rapidaptor with quick-release chuck, 29 BiTorsion bits for long service life, tough, for universal use.

05057430001	
889/4/1 K	1 x 1/4"x50
851/1 BTZ PH	2 x PH 1x25; 5 x PH 2x25; 2 x PH 3x25
855/1 BTZ PZ	2 x PZ 1x25; 6 x PZ 2x25; 2 x PZ 3x25
867/1 TORX®	1 x TX 10x25; 2 x TX 15x25; 2 x TX 20x25;
BTZ	2 x TX 25x25; 2 x TX 30x25; 1 x TX 40x25

Bit-Check 12 BiTorsion 1



1 bit holder Rapidaptor with quick-release chuck, 11 BiTorsion bits for long service life, tough, for universal use.

05057420001	
889/4/1 K	1 x 1/4"x50
851/1 BTZ PH	1 x PH 1x25; 2 x PH 2x25
855/1 BTZ PZ	1 x PZ 1x25; 2 x PZ 2x25
867/1 TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25;
BTZ	1 x TX 25x25; 1 x TX 30x25

Bit-Check 10 BiTorsion 1



1 BiTorsion bit holder Rapidaptor with quick-release chuck, 9 BiTorsion bits for long service life, tough, for universal use.

05056374001	
897/4 R	1 x 1/4"x75
851/1 BTZ PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
855/1 BTZ PZ	1 x PZ 1x25; 1 x PZ 2x25; 1 x PZ 3x25
800/1 BTZ	1 x 0,8x5,5x25; 1 x 1,0x5,5x25; 1 x 1,2x6,5x25

Bit-Check 10 BiTorsion 2




1 BiTorsion bit holder Rapidaptor with quick-release chuck, 9 BiTorsion bits for long service life, tough, for universal use.

05057117001	
897/4 R	1 x 1/4"x75
851/1 BTZ PH	1 x PH 2x25
855/1 BTZ PZ	1 x PZ 1x25; 2 x PZ 2x25
867/1 TORX® BTZ	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25

Tip



BiTorsion



The effectiveness of the BiTorsion system comes from a combination of two shock-absorbing spring elements.

Both bits as well as holders have a cushioning torsion zone that diverts the kinetic energy away from the drive tip during peak loads.



BDC-Bits




BDC-Bits are absolutely premium products. They have a softer BiTorsion zone which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits.

The diamond coating lowers the danger of slipping as the minute diamond particles literally "bite" themselves into the screw head. B stands for BiTorsion. DC stands for diamond coated.



"Take it easy"



"Take it easy" tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.

Bit-Checks / Bit-Safes BiTorsion

BiTorsion – Distinct extension of service life

Bit-Check 10 BiTorsion 3 SB



1 BiTorsion bit holder Rapidaptor with quick-release chuck, 9 BiTorsion bits for long service life, tough, for universal use.

			4013288
05073418001	897/4 R	1 x 1/4"x75	128157
	851/1 BTZ PH	1 x PH 2x25	
	855/1 BTZ PZ	1 x PZ 1x25; 1 x PZ 2x25; 1 x PZ 3x25	
	867/1 TORX® BTZ	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25	

Bit-Check 10 PZ BiTorsion 1



1 BiTorsion bit holder Rapidaptor with quick-release chuck, 9 BiTorsion bits for long service life, tough, for universal use.

05056368001	
897/4 R	1 x 1/4"x75
855/1 BTZ PZ	7 x PZ 2x25; 2 x PZ 3x25

Bit-Check 10 PZ BiTorsion 2



1 BiTorsion bit holder Rapidaptor with quick-release chuck, 9 BiTorsion bits for long service life, extra-hard.

05347153001	
897/4 R	1 x 1/4"x75
855/1 BTH PZ	1 x PZ 1x25; 7 x PZ 2x25; 1 x PZ 3x25

Bit-Check 7 PZ BiTorsion 1



1 bit holder Rapidaptor with quick-release chuck suitable, 6 BiTorsion bits for long service life, extra-hard.

05340260001	
● ○	889/4/1 K 1 x 1/4"x50
⊕	855/1 BTH PZ 1 x PZ 1x25; 4 x PZ 2x25; 1 x PZ 3x25

Tip



BiTorsion




The BiTorsion holder and the BiTorsion bit can, of course, be used independently of one another.

Chuck-all



The Rapidaptor quick-release chucks hold both 1/4" bits as per DIN ISO 1173 C 6,3 (Wera series 1) and E 6,3 (Wera series 4).

Rapid-in and self-lock



The bit can be pushed into the chuck without moving the sleeve. It automatically locks with a secure and wobble-free fit as soon as the bit is applied to the screw.

Rapid-out



Simply push the sleeve forward to change the bit. The spring mechanism lifts the bit off the magnet and unlocks the tool. The bit can be easily removed. Particularly helpful: even the smallest bits can be removed without any extra tools.



Bit-Checks Diamond

Bits with “bite”

Bit-Check 30 Diamond 1



1 bit holder Rapidaptor with quick-release chuck, 29 BiTorsion bits for long service life, diamond-coated (BDC) for secure screw fit.

05057431001	
889/4/1 K	1 x 1/4"x50
851/1 BDC PH	2 x PH 1x25; 4 x PH 2x25; 1 x PH 3x25
855/1 BDC PZ	2 x PZ 1x25; 4 x PZ 2x25; 1 x PZ 3x25
867/1 TORX®	2 x TX 10x25; 2 x TX 15x25; 3 x TX 20x25; BDC 3 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25
800/1 BDC	1 x 0,8x5,5x25; 1 x 1,0x5,5x25; 1 x 1,2x6,5x25

Bit-Check 10 Diamond 1



1 BiTorsion bit holder Rapidaptor with quick-release chuck, 9 BiTorsion bits for long service life, diamond-coated (BDC) for secure screw fit.

05057116001	
897/4 R	1 x 1/4"x75
851/1 BDC PH	1 x PH 2x25
855/1 BDC PZ	1 x PZ 1x25; 2 x PZ 2x25
867/1 TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; BDC 1 x TX 25x25; 1 x TX 30x25

Bit-Check 12 Diamond 1



1 bit holder Rapidaptor with quick-release chuck, 11 BiTorsion bits for long service life, diamond-coated (BDC) for secure screw fit.

05057421001	
889/4/1 K	1 x 1/4"x50
851/1 BDC PH	1 x PH 1x25; 2 x PH 2x25
855/1 BDC PZ	1 x PZ 1x25; 2 x PZ 2x25
867/1 TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; BDC 1 x TX 25x25; 1 x TX 30x25

Bit-Check 7 Diamond 1



1 bit holder Rapidaptor with quick-release chuck, 6 BiTorsion bits for long service life, diamond-coated (BDC) for secure screw fit.

05057416001	
889/4/1 K	1 x 1/4"x50
851/1 BDC PH	1 x PH 1x25; 1 x PH 2x25
855/1 BDC PZ	1 x PZ 1x25; 1 x PZ 2x25
800/1 BDC	1 x 1,0x5,5x25; 1 x 1,2x6,5x25

Bit-Check 7 Diamond 1 SB

05073419001	4013288 183682
889/4/1 K	1 x 1/4"x50
851/1 BDC PH	1 x PH 1x25; 1 x PH 2x25
855/1 BDC PZ	1 x PZ 1x25; 1 x PZ 2x25
800/1 BDC	1 x 1,0x5,5x25; 1 x 1,2x6,5x25



Tip



BDC-Bits



BDC-Bits are absolutely premium products. They have a softer BiTorsion zone which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits. The diamond coating lowers the danger of slipping as the minute diamond particles literally “bite” themselves into the screw head. B stands for BiTorsion. DC stands for diamond coated.



“Take it easy”



“Take it easy” tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.



BiTorsion Rapidaptor



BiTorsion bit holders are suitable for all bits in accordance with C 6,3 and E 6,3. The optimally coordinated features of the torsion zones on the BiTorsion bits and BiTorsion holder permit a phased yield when under strain. This two-phase system prevents premature wear. The bits and the holder can be used independently of one another. A long tool service life is guaranteed when both elements are used.



Bit-Checks Diamond

Bits with “bite”

Bit-Check 7 PZ Diamond 1



1 bit holder Rapidaptor with quick-release chuck, 6 BiTorsion bits for long service life, diamond-coated (BDC) for secure screw fit.

05057412001	
●○	889/4/1 K 1 x 1/4"x50
⊕	855/1 BDC PZ 2 x PZ 1x25; 3 x PZ 2x25; 1 x PZ 3x25

Bit-Check 7 PH Diamond 1



1 bit holder Rapidaptor with quick-release chuck, 6 BiTorsion bits for long service life, diamond-coated (BDC) for secure screw fit.

05057414001	
●○	889/4/1 K 1 x 1/4"x50
⊕	851/1 BDC PH 2 x PH 1x25; 3 x PH 2x25; 1 x PH 3x25

Bit-Check 7 PZ Diamond 1 SB

05073534001	4013288 180940
●○	889/4/1 K 1 x 1/4"x50
⊕	855/1 BDC PZ 2 x PZ 1x25; 3 x PZ 2x25; 1 x PZ 3x25



Bit-Check 7 TX Diamond 1



1 bit holder Rapidaptor with quick-release chuck, 6 BiTorsion bits for long service life, diamond-coated (BDC) for secure screw fit.

05057415001	
●○	889/4/1 K 1 x 1/4"x50
⊕	867/1 TORX® BDC 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25

Bit-Check 6 PH Diamond 1



6 BitTorsion bits for long service life, diamond-coated (BDC) for secure screw fit.

05057404001	
	851/4 BDC PH 2 x PH 1x50; 3 x PH 2x50; 1 x PH 3x50

Bit-Check 6 PZ Diamond 1



6 BitTorsion bits for long service life, diamond-coated (BDC) for secure screw fit.

05057402001	
	855/4 BDC PZ 2 x PZ 1x50; 3 x PZ 2x50; 1 x PZ 3x50

Tip

Chuck-all




The Rapidaptor quick-release chucks hold both 1/4" bits as per DIN ISO 1173 C 6,3 (Wera series 1) and E 6,3 (Wera series 4).

Single-hand



All functions of the quick-release chuck such as the inserting or releasing of bits can be done with just one hand. That is faster, more economic and ergonomic. There are no unnecessary manoeuvres.

Rapid-in and self-lock



The bit can be pushed into the chuck without moving the sleeve. It automatically locks with a secure and wobble-free fit as soon as the bit is applied to the screw.

Rapid-out



Simply push the sleeve forward to change the bit. The spring mechanism lifts the bit off the magnet and unlocks the tool. The bit can be easily removed. Particularly helpful: even the smallest bits can be removed without any extra tools.

Rapid-spin



The free-turning sleeve allows screw steadying at the start of the screwdriving process. This makes it easier to apply the tool to the screw and prevents slipping. It can also be used as a short extension for 1/4" applications e.g. in combination with the Wera Zyklop Ratchets.



Bit-Checks / Bit-Safes Universal

For general use

Bit-Safe 61 Universal 1



1 bit holder Rapidaptor with strong permanent magnet and quick-release chuck, 60 bits, Torsion-style (T) design to reduce premature wear, tough (Z), for universal use.

05057122001	
889/4/1 K	1 x 1/4"x50
851/1 TZ PH	3 x PH 1x25; 10 x PH 2x25; 2 x PH 3x25
855/1 TZ PZ	3 x PZ 1x25; 10 x PZ 2x25; 2 x PZ 3x25
867/1 TZ TORX®	2 x TX 10x25; 3 x TX 15x25; 3 x TX 20x25; 3 x TX 25x25; 3 x TX 30x25; 2 x TX 40x25
800/1 TZ	1 x 0,6x4,5x25; 1 x 1,0x5,5x25; 1 x 1,2x6,5x25
840/1 Z Hex-Plus	3 x 2,5x25; 3 x 3,0x25; 3 x 4,0x25; 2 x 5,0x25

Bit-Safe 43 Universal 1



1 universal bit holder with stainless steel sleeve, retaining ring, and strong permanent magnet, 42 bits, Torsion-style (T) design to reduce premature wear, tough, for universal use.

05057450001	
889/4/1	1 x 899/4/1 Kx1/4"x50
851/1 Z PH	1 x PH 2x25
851/4 TZ PH	1 x PH 2x50; 2 x PH 3x25
855/1 Z PZ	2 x PZ 1x25; 5 x PZ 2x25; 2 x PZ 3x25
855/4 TZ PZ	1 x PZ 1x50; 2 x PZ 2x50
867/1 TORX®	3 x TX 10x25; 4 x TX 15x25; 4 x TX 20x25; 4 x TX 25x25; 4 x TX 30x25; 1 x TX 40x25
867/4 Z TORX®	1 x TX 10x50; 1 x TX 15x50; 1 x TX 20x50; 1 x TX 25x50; 1 x TX 30x50; 1 x TX 40x50

Bit-Safe 61 Universal 2



1 universal bit holder with stainless steel sleeve, retaining ring, and strong permanent magnet, 60 bits, tough, for universal use.

05057455001	
889/4/1	1 x 899/4/1 Kx1/4"x50
851/1 Z PH	10 x PH 1x25; 20 x PH 2x25; 5 x PH 3x25
855/1 Z PZ	3 x PZ 2x25
867/1 TORX®	3 x TX 10x25; 5 x TX 15x25; 5 x TX 20x25; 5 x TX 25x25; 2 x TX 30x25; 2 x TX 40x25

Bit-Check 30 Universal 1



1 bit holder Rapidaptor with quick-release chuck, 29 bits, Torsion-style (T) design to reduce premature wear, tough (Z), for universal use, extra-hard (H).

05056440001	
889/4/1 K	1 x 1/4"x50
851/1 TZ PH	2 x PH 1x25; 3 x PH 2x25; 1 x PH 3x25
855/1 TH PZ	2 x PZ 1x25; 3 x PZ 2x25; 1 x PZ 3x25
867/1 TZ TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25
867/1 Z TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25
800/1 TZ	1 x 1,0x5,5x25
840/1 Z Hex-Plus	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25; 1 x 8,0x25

Bit-Check 30 TX Universal 1



1 universal bit holder with stainless steel sleeve, retaining ring, and strong permanent magnet, 29 bits, tough, for universal use.

05057908001	
899/4/1	1 x 899/4/1 Kx1/4"x50
867/1 TORX®	3 x TX 10x25; 5 x TX 15x25; 8 x TX 20x25; 7 x TX 25x25; 4 x TX 30x25; 2 x TX 40x25

Bit-Check 10 Universal 1



1 bit holder with strong permanent magnet and quick-release chuck, 9 bits, Torsion-style (T) design to reduce premature wear, tough (Z), for universal use.

05056161001	
895/4/1 K	1 x 1/4"x52
851/1 TZ PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
855/1 TZ PZ	1 x PZ 1x25; 1 x PZ 2x25; 1 x PZ 3x25
800/1 TZ	1 x 0,8x5,5x25; 1 x 1,0x5,5x25; 1 x 1,2x6,5x25

Bit-Check 10 Universal 2



1 bit holder with strong permanent magnet and quick-release chuck, 9 bits, Torsion-style (T) design to reduce premature wear, tough, for universal use, extra-hard (H).

05134200001	
895/4/1 K	1 x 1/4"x52
855/1 TH PZ	1 x PZ 1x25; 2 x PZ 2x25
867/1 TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25

Tip



Torsion bits



Torsion bits absorb the damaging peak torque loads in the torsion zone. This prevents premature wear and enhances the service life of the bits.



Rapidaptor holder



Rapid bit change without needing any additional tools. One-hand operation with a freely spinning sleeve for simplified guidance of the tool.



Hex-Plus



Hexagon screws can endure a problem because the contact surfaces delivering the power from the conventional tool, is transferred to the screw via very small surface areas. The consequence: the screw can become damaged (rounding out). Hex-Plus tools have a greater contact surface that prevents this from happening! Good to know: Hex-Plus tools fit into every standard hexagon socket screw!



Bit-Checks / Bit-Safes Universal

For general use

Bit-Check 10 Universal 3



1 bit holder Rapidaptor with quick-release chuck, 9 bits, Torsion-style (T) design to reduce premature wear, tough (Z), for universal use.

05056375001	
889/4/1 K	1 x 1/4"x50
851/1 TZ PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
855/1 TZ PZ	1 x PZ 1x25; 1 x PZ 2x25; 1 x PZ 3x25
800/1 TZ	1 x 0,8x5,5x25; 1 x 1,0x5,5x25; 1 x 1,2x6,5x25

Bit-Check 10 Universal 4



1 Universal bit holder with stainless steel sleeve, retaining ring, and strong permanent magnet, 9 bits, Torsion-style (T) design to reduce premature wear, tough (Z), for universal use.

05056159001	
899/4/1	1 x 899/4/1 Kx1/4"x50
851/1 TZ PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
855/1 TZ PZ	1 x PZ 1x25; 1 x PZ 2x25; 1 x PZ 3x25
800/1 TZ	1 x 0,8x5,5x25; 1 x 1,0x5,5x25; 1 x 1,2x6,5x25

Bit-Check 10 Universal 3 SB

05073410001	4013288 099495
889/4/1 K	1 x 1/4"x50
800/1 TZ	1 x 0.8x5.5x25; 1 x 1.0x5.5x25; 1 x 1.2x6.5x25
851/1 TZ PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
855/1 TZ PZ	1 x PZ 1x25; 1 x PZ 2x25; 1 x PZ 3x25



Bit-Check 10 Universal 5 SB



1 Universal bit holder with stainless steel sleeve, retaining ring, and strong permanent magnet, 9 bits, tough, for universal use.

05073416001	4013288 128164
899/4/1	1 x 899/4/1 Kx1/4"x50
851/1 Z PH	1 x PH 2x25
855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25; 1 x PZ 3x25
867/1 TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25

Bit-Check 10 PZ Universal 1



1 bit holder with strong permanent magnet and quick-release chuck, 9 bits, Torsion-style (T) design to reduce premature wear, extra-hard (H).

05056163001	
●○	895/4/1 K 1 x 1/4"x52
⊕	855/1 TH PZ 3 x PZ 1x25; 3 x PZ 2x25; 3 x PZ 3x25

Bit-Check 10 PZ Universal 2



1 bit holder Rapidaptor with quick-release chuck, 9 bits, Torsion-style (T) design to reduce premature wear, extra-hard (H).

05056376001	
●○	889/4/1 K 1 x 1/4"x50
⊕	855/1 TH PZ 3 x PZ 1x25; 3 x PZ 2x25; 3 x PZ 3x25

Tip

Chuck-all




The Rapidaptor quick-release chucks hold both 1/4" bits as per DIN ISO 1173 C 6,3 (Wera series 1) and E 6,3 (Wera series 4).

Single-hand



All functions of the quick-release chuck such as the inserting or releasing of bits can be done with just one hand. That is faster, more economic and ergonomic. There are no unnecessary manoeuvres.

Rapid-in and self-lock



The bit can be pushed into the chuck without moving the sleeve. It automatically locks with a secure and wobble-free fit as soon as the bit is applied to the screw.

Rapid-out



Simply push the sleeve forward to change the bit. The spring mechanism lifts the bit off the magnet and unlocks the tool. The bit can be easily removed. Particularly helpful: even the smallest bits can be removed without any extra tools.

Rapid-spin



The free-turning sleeve allows screw steadying at the start of the screwdriving process. This makes it easier to apply the tool to the screw and prevents slipping. It can also be used as a short extension for 1/4" applications e.g. in combination with the Wera Zyklop Ratchets.



Bit-Checks / Bit-Safes Universal

For general use

Bit-Check 10 TX Universal 1



1 bit holder with quick-release chuck, 9 bits, Torsion-style (T) design to reduce premature wear, tough (Z), for universal use.

05056164001	
●○	894/4/1 K 1 x 1/4"x51
⊕	867/1 TZ TORX® 1 x TX 8x25; 1 x TX 9x25; 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 27x25; 1 x TX 30x25; 1 x TX 40x25

Bit-Check 7 Universal 1



1 universal bit holder with stainless steel sleeve and strong permanent magnet, 6 bits, tough (Z), for universal use.

05056295001	
●○	893/4/1 K 1 x 1/4"x50
⊕	851/1 Z PH 1 x PH 1x25; 1 x PH 2x25
⊕	855/1 Z PZ 1 x PZ 1x25; 1 x PZ 2x25
●	800/1 Z 1 x 1,0x5,5x25; 1 x 1,2x6,5x25

Bit-Check 10 TX Universal 2



1 bit holder Rapidaptor with quick-release chuck, 9 bits, tough, for universal use.

05057115001	
●○	888/4/1 K 1 x 1/4"x50
⊕	867/1 TORX® 1 x TX 6x25; 1 x TX 8x25; 1 x TX 9x25; 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25

Bit-Check 7 Universal 1 SB

	4013288
05073406001	036186
●○	893/4/1 K 1 x 1/4"x50
⊕	851/1 Z PH 1 x PH 1x25; 1 x PH 2x25
⊕	855/1 Z PZ 1 x PZ 1x25; 1 x PZ 2x25
●	800/1 Z 1 x 1.0x5.5x25; 1 x 1.2x6.5x25



Bit-Check 7 Universal 2



1 bit holder with strong permanent magnet and quick-release chuck, 6 bits, Torsion-style (T) design to reduce premature wear, tough (Z), for universal use.

05056155001	
●○	895/4/1 K 1 x 1/4"x52
⊕	851/1 TZ PH 1 x PH 1x25; 1 x PH 2x25
⊕	855/1 TZ PZ 1 x PZ 1x25; 1 x PZ 2x25
●	800/1 TZ 1 x 1,0x5,5x25; 1 x 1,2x6,5x25

Bit-Check 7 PZ Universal 2



1 bit holder with strong permanent magnet and quick-release chuck, 6 bits, Torsion-style (T) design to reduce premature wear, extra-hard (H).

05056157001	
●○	895/4/1 K 1 x 1/4"x52
⊕	855/1 TH PZ 2 x PZ 1x25; 3 x PZ 2x25; 1 x PZ 3x25

Bit-Check 7 Universal 3



1 universal bit holder with stainless steel sleeve and strong permanent magnet, 6 bits, tough (Z), for universal use.

05340322001	
●○	893/4/1 K 1 x 1/4"x50
⊕	851/1 Z PH 1 x PH 1x25; 1 x PH 2x25
●	800/1 Z 1 x 1,0x5,5x25; 1 x 1,2x6,5x25
○	868/1 Z 1 x # 1x25; 1 x # 2x25

Bit-Check 7 PZ Universal 1



1 universal bit holder with stainless steel sleeve and strong permanent magnet, 6 bits, tough (Z), for universal use.

05056296001	
●○	893/4/1 K 1 x 1/4"x50
⊕	855/1 Z PZ 2 x PZ 1x25; 3 x PZ 2x25; 1 x PZ 3x25

Bit-Check 7 PZ Universal 1 SB

	4013288
05073536001	105998
●○	893/4/1 K 1 x 1/4"x50
⊕	855/1 Z PZ 2 x PZ 1x25; 3 x PZ 2x25; 1 x PZ 3x25



Bit-Checks / Bit-Safes Universal

For general use

Bit-Check 7 TX Universal 1



1 universal bit holder with stainless steel sleeve and strong permanent magnet, 6 bits, tough, for universal use.

05056294001	
●○	893/4/1 K 1 x 1/4"x50
⊕	867/1 TORX® 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25

Bit-Check 7 Hex-Plus 1



1 bit holder with strong permanent magnet and quick-release chuck, 6 bits, tough (Z), for universal use.

05056168001	
●○	895/4/1 K 1 x 1/4"x52
○	840/1 Z 1 x 2,0x25; 1 x 2,5x25; 1 x 3,0x25; 1 x 4,0x25; Hex-Plus 1 x 5,0x25; 1 x 6,0x25

Bit-Check 7 TX Universal 1 SB



05073404001



4013288

038111

- 893/4/1 K 1 x 1/4"x50
- ⊕ 867/1 TORX® 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25



Bit-Check 7 TiN Universal 1



1 universal bit holder with stainless steel sleeve and strong permanent magnet, 6 bits, TiN coating for the hardness needed e.g. in series screwdriving operations.

05056285001	
●○	893/4/1 K 1 x 1/4"x50
⊕	851/1 TiN PH 1 x PH 1x25; 1 x PH 2x25
⊕	855/1 TiN PZ 1 x PZ 1x25; 1 x PZ 2x25
●	800/1 TiN 1 x 0,8x5,5x25; 1 x 1,2x6,5x25

Bit-Check 7 TX B0 Universal 1



1 bit holder with quick-release chuck, 6 bits, tough (Z), for universal use.

05056158001	
●○	894/4/1 K 1 x 1/4"x51
⊕	867/1 Z TORX® 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; B0 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25

Bit-Check 7 TiN Universal 1 SB



05073537001



4013288

106001

- 893/4/1 K 1 x 1/4"x50
- ⊕ 851/1 TiN PH 1 x PH 1x25; 1 x PH 2x25
- ⊕ 855/1 TiN PZ 1 x PZ 1x25; 1 x PZ 2x25
- 800/1 TiN 1 x 0.8x5.5x25; 1 x 1.2x6.5x25



Bit-Check 7 TiN PZ Universal 1 SB



1 universal bit holder with stainless steel sleeve and strong permanent magnet, 6 bits, TiN coating for the hardness needed e.g. in series screwdriving operations.

05073538001	893/4/1 K	1 x 1/4"x50	4013288 106018
	855/1 TiN PZ	2 x PZ 1x25; 3 x PZ 2x25; 1 x PZ 3x25	

Bit-Check 6 Universal 1



6 bits, Torsion-style (T) design to reduce premature wear, tough (Z), for universal use.

05056474001		
+	851/4 TZ PH	1 x PH 1x50; 1 x PH 2x50
+	855/4 TZ PZ	1 x PZ 1x50; 1 x PZ 2x50
-	800/4 Z	1 x 1,0x5,5x50; 1 x 1,2x6,5x50

Bit-Check 6 Universal 1 SB



05073635001		4013288 155276
+	851/4 TZ PH	1 x PH 1x50; 1 x PH 2x50
+	855/4 TZ PZ	1 x PZ 1x50; 1 x PZ 2x50
-	800/4 Z	1 x 1.0x5.5x50; 1 x 1.2x6.5x50



Tip

TiN-Bits



TiN stands for titanium-nitride. An extremely hard coating to withstand permanent loads such as during continual screwdriving operations in series manufacturing.

Universal holder with quick-release chuck



For a firm, wobble-free connection between holder and bit with quick-release action. Simply push sleeve forward to change bits.

Universal holder with stainless steel sleeve



The retaining ring and the strong permanent magnet ensure a particularly secure fitting of the bit in the holder.



Bit-Checks / Bit-Safes Universal

For general use

Bit-Check 6 Universal 2



6 bits, Torsion-style (T) design to reduce premature wear, tough (Z), for universal use.

05056473001	
+	851/4 TZ PH 1 x PH 2x50
+	855/4 TZ PZ 1 x PZ 1x50; 1 x PZ 2x50
+	867/4 Z TORX® 1 x TX 15x50; 1 x TX 20x50; 1 x TX 25x50

Bit-Check 6 TX Universal 1



6 bits, Torsion-style (T) design to reduce premature wear, tough (Z), for universal use.

05056472001	
+	867/4 Z TORX® 1 x TX 10x50; 1 x TX 15x50; 1 x TX 20x50; 1 x TX 25x50; 1 x TX 30x50; 1 x TX 40x50

Bit-Check 6 Universal 2 SB

		4013288
05073638001		155245
+	851/4 TZ PH	1 x PH 2x50
+	855/4 TZ PZ	1 x PZ 1x50; 1 x PZ 2x50
+	867/4 Z TORX®	1 x TX 15x50; 1 x TX 20x50; 1 x TX 25x50



Bit-Check 6 TX Universal 1 SB

		4013288
05073637001		155252
+	867/4 Z TORX®	1 x TX 10x50; 1 x TX 15x50; 1 x TX 20x50; 1 x TX 25x50; 1 x TX 30x50; 1 x TX 40x50



Bit-Check 6 PZ Universal 1



6 bits, Torsion-style (T) design to reduce premature wear, tough (Z), for universal use.

05056471001	
+	855/4 TZ PZ 2 x PZ 1x50; 3 x PZ 2x50; 1 x PZ 3x50

Bit-Check 6 TX HF 1



6 bits, holding function for TORX® socket screws made according to Acument Intellectual Properties specifications.

05056476001	
	867/4 TORX® 1 x TX 10x50; 1 x TX 15x50; 1 x TX 20x50; HF 1 x TX 25x50; 1 x TX 30x50; 1 x TX 40x50



Tip



The HF profile



In tight assembly or disassembly situations, for example in engine compartments, it is not possible to securely hold the screw with the hand on the screwdriver, and the screw subsequently often gets lost. Lengthy searches or the loss of the screw (with the associated danger that could bring about) are the consequence. The HF

tools developed by Wera are ideal because they feature an optimised geometry of the original TORX® profile. The wedging forces resulting from the surface pressure between the drive tip and the screw profile mean that the screw is securely held on the tool!



Bit-Checks Wood

For wood applications.

Bit-Safe 61 Wood 1



1 bit holder with strong permanent magnet and quick-release chuck, 60 bits, tough, for universal use.

05057442001	
	895/4/1 K 1 x 1/4"x52
	851/1 Z PH 3 x PH 1x25
	855/1 Z PZ 10 x PZ 1x25; 20 x PZ 2x25; 5 x PZ 3x25
	867/1 TORX® 3 x TX 10x25; 5 x TX 15x25; 5 x TX 20x25; 5 x TX 25x25; 2 x TX 30x25; 2 x TX 40x25

Bit-Check 30 Wood 2



1 universal bit holder with stainless steel sleeve, retaining ring, and strong permanent magnet, 29 bits, tough, for universal use.

05057432001	
	899/4/1 1 x 899/4/1 Kx1/4"x50
	851/1 Z PH 1 x PH 2x25
	855/1 Z PZ 2 x PZ 1x25; 5 x PZ 2x25; 2 x PZ 3x25
	867/1 TORX® 3 x TX 10x25; 4 x TX 15x25; 4 x TX 20x25; 4 x TX 25x25; 3 x TX 30x25; 1 x TX 40x25

Bit-Check 30 Wood 1



1 magnetic Rapidaptor quick-release bit holder with ringmagnet, 29 bits, Torsion-style (T) design to reduce premature wear, tough, for universal use, extra-hard (H).

05057433001	
	887/4 RR 1 x 1/4"x57
	851/1 TZ PH 2 x PH 2x25; 1 x PH 3x25
	855/1 TH PZ 3 x PZ 1x25; 6 x PZ 2x25; 2 x PZ 3x25
	867/1 TZ TORX® 2 x TX 10x25; 2 x TX 15x25; 4 x TX 20x25; 4 x TX 25x25; 2 x TX 30x25; 1 x TX 40x25

Bit-Check 12 Wood 1



1 magnetic Rapidaptor quick-release bit holder with ringmagnet, 11 bits, Torsion-style (T) design to reduce premature wear, tough, for universal use, extra-hard (H).

05057423001	
	887/4 RR 1 x 1/4"x57
	855/1 TH PZ 1 x PZ 1x25; 2 x PZ 2x25; 1 x PZ 3x25
	851/1 TH PH 1 x PH 2x25
	867/1 TORX® 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25

Bit-Check 12 Wood 2




1 universal bit holder with stainless steel sleeve, retaining ring, and strong permanent magnet, 11 bits, tough, for universal use.

05057422001	
●○	899/4/1 1 x 899/4/1 Kx1/4"x50
⊕	851/1 Z PH 1 x PH 2x25
⊕	855/1 Z PZ 1 x PZ 1x25; 2 x PZ 2x25; 1 x PZ 3x25
⊕	867/1 TORX® 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25


Tip



Rapidaptor ring magnet



The floating, free-turning sleeve on the Rapidaptor with powerful ring magnet securely holds even large and heavy screws.



There is no need to hold the screw when applying the tool – something which can be dangerous and painful!

Universal holder with quick-release chuck



For a firm, wobble-free connection between holder and bit with quick-release action. Simply push sleeve forward to change bits.

Universal holder with stainless steel sleeve



The retaining ring and the strong permanent magnet ensure a particularly secure fitting of the bit in the holder.



For steel applications.

HEX-PLUS



HEX-PLUS



	
05057434001	
	899/4/1 1 x 899/4/1 Kx1/4"x50
	851/1 Z PH 3 x PH 1x25; 3 x PH 2x25; 2 x PH 3x25
	855/1 Z PZ 3 x PZ 1x25; 3 x PZ 2x25; 3 x PZ 3x25
	867/1 TORX® 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25
	800/1 Z 1 x 0,6x4,5x25; 1 x 1,0x5,5x25; 1 x 1,2x6,5x25
	840/1 Z 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25
	Hex-Plus

05057424001	
●●	899/4/1 1 x 899/4/1 Kx1/4"x50
⊕	851/1 Z PH 1 x PH 1x25; 1 x PH 2x25
⊕	855/1 Z PZ 1 x PZ 1x25; 1 x PZ 2x25
✱	867/1 TORX® 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25
○	840/1 Z Hex-Plus 1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25



Bit Sets for Special Applications

Screwdriving, Drilling, Tapping, Countersinking and Deburring

843 Stepped drill bits, 4-20 mm



Construction: 9 drill steps increasing by 2 mm for material with a max. thickness of 4.5 mm. With edge breaker (sheet metal countersink) at Ø 10 for 1-mm sheet metal

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6,3 holders

	 mm
05104672001	75,0

844/7 Tap Bits Set



7 pieces in robust case

1 universal bit holder 888/4/1 K Rapidaptor, nonmagnetic, suitable for power tools and electronic drills; single tap bits with 1/4" drive, suitable for holders with DIN ISO 1173-D 6,3 receiver.

	
05104654001	
	888/4/1 K 1 x 1/4"x50
	844 1 x 3,0x33,0; 1 x 4,0x35,0; 1 x 5,0x36,0; 1 x 6,0x40,0; 1 x 8,0x40,0; 1 x 10,0x40,0

844 Single Tap Bits



Application: For cutting metric threads

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6,3 holders

	 mm	 mm	 mm	
05104666001	3,0	10,00	33,0	M 3
05104667001	4,0	11,00	35,0	M 4
05104668001	5,0	12,50	36,0	M 5
05104669001	6,0	18,00	40,0	M 6
05104670001	8,0	20,00	40,0	M 8
05104671001	10,0	20,00	40,0	M 10

845 1-flute Countersink Bits



Application: For countersinking and deburring

Design: 1-flute

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6,3 holders

	 mm	 mm	 mm	
05104660001	6,30	21,00	32,0	M 3
05104661001	8,30	21,00	32,0	M 4
05104662001	10,40	21,00	34,0	M 5
05104663001	12,40	21,00	36,0	M 6
05104664001	16,50	22,00	40,0	M 8
05104665001	20,50	22,00	43,0	M 10



Bit Sets for Special Applications

Screwdriving, Drilling, Tapping, Countersinking and Deburring

845/8 1-flute Countersink Bits Set



8 pieces in robust case

1 Kraftform 816 R Rapidaptor quick release bit holder
888/4/1 K Rapidaptor, nonmagnetic, suitable for power tools and electronic drills.

05104655001		
●	816 R	1 x 1/4"x119
●○	888/4/1 K	1 x 1/4"x50
●	845	1 x 6,30x32,0; 1 x 8,30x32,0; 1 x 10,40x34,0; 1 x 12,40x36,0; 1 x 16,50x40,0; 1 x 20,50x43,0

847 HSS Combined Tap Bits



Application: Drilling, tapping, deburring

Design: HSS

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6,3 holders

	mm	mm	mm	
05104640001	2,5	12,00	36,0	M 3
05104641001	3,3	12,00	39,0	M 4
05104642001	4,2	12,00	41,0	M 5
05104643001	5,0	12,00	44,0	M 6
05104644001	6,8	12,00	51,0	M 8
05104645001	8,5	12,00	59,0	M 10

846 3-flute Countersink Bit



Application: For deburring, chamfering, countersinking

Design: 3-flute 90° DIN 335-C cutter

Drive: 1/4" hexagon suitable for holders with
DIN ISO 1173-D 6,3 receiver

	mm	mm	mm	
05104630001	6,30	20,00	31,0	M 3
05104631001	8,30	20,00	31,0	M 4
05104632001	10,40	20,00	34,0	M 5
05104633001	12,40	20,00	35,0	M 6
05104634001	16,50	20,00	40,0	M 8
05104635001	20,50	20,00	41,0	M 10

846/8 3-flute Countersink Bits Set



8 pieces in robust case

1 Kraftform quick release bitholding screwdriver 816 R

1 universal bit holder 888/4/1 K Rapidaptor suitable for power tools and electronic drills; countersink bits with 1/4" drive suitable for power tools with DIN ISO 1173-D 6,3 receiver.

05104650001		
●	816 R	1 x 1/4"x119
●○	888/4/1 K	1 x 1/4"x50
●	846 HSS	1 x 6,30x31,0; 1 x 8,30x31,0; 1 x 10,40x34,0; 1 x 12,40x35,0; 1 x 16,50x40,0; 1 x 20,50x41,0

847/7 Set Combination Drill Bits Set



7 pieces in robust case

1 Universal bit holder Rapidaptor 888/4/1 K with quick-release chuck suitable for power tools and electronic drills; combination drill bits, 1/4" drive, suitable for power tools with DIN ISO 1173-D 6,3 receiver.

05104651001	
888/4/1 K	1 x 1/4"x50
847 HSS	1 x 2,5x36,0; 1 x 3,3x39,0; 1 x 4,2x41,0; 1 x 5,0x44,0; 1 x 6,8x51,0; 1 x 8,5x59,0

849 HSS Twist Wood Drill Bits



Application: For point-precision, splinter-free drilling in soft woods, hard woods, and laminated panel material

Design: HSS

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6,3 holders

	mm	mm	mm
05104600001	3,0	32,00	70,0
05104601001	4,0	32,00	74,0
05104602001	5,0	43,00	85,0
05104603001	6,0	45,00	95,0
05104604001	8,0	60,00	110,0
05104605001	10,0	70,00	120,0

848 HSS Metal Twist Drill Bits



Application: For precise drilling in metal

Construction: HSS

Drive: 1/4" hexagon, suitable for DIN ISO 1173-D 6,3 holders

	mm	mm	mm
05104610001	3,0	16,00	38,0
05104611001	3,1	18,00	40,0
05104612001	3,3	18,00	40,0
05104613001	4,0	20,00	44,0
05104614001	4,1	20,00	44,0
05104615001	4,2	20,00	45,0
05104616001	5,0	26,00	50,0
05104617001	5,1	26,00	50,0
05104618001	6,0	26,00	50,0
05104619001	6,8	30,00	50,0
05104620001	8,0	32,00	51,0
05104621001	8,5	33,00	53,0
05104622001	10,0	38,00	54,0

848/851/867/19 Metal Twist Drill Bits and Bits Set



19 pieces in robust belt pouch

1 Universal bit holder Rapidaptor 888/4/1 K suitable for power tools and electronic drills; metal twist Drill Bits and Bits with 1/4" drive, suitable for power tools with DIN ISO 1173-D 6,3 receiver.

05104652001	
888/4/1 K	1 x 1/4"x50
851/1 TZ PH	2 x PH 1x25; 3 x PH 2x25; 1 x PH 3x25
848 HSS	1 x 3,0x38,0; 1 x 4,0x44,0; 1 x 4,2x45,0; 1 x 5,0x50,0; 1 x 6,0x50,0; 1 x 8,0x51,0
867/1 TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25



849/855/867/18 Wood Twist Drill Bits and Bits Set



18 pieces in robust belt pouch

1 Universal bit holder Rapidaptor 889/4/1 K suitable for power tools and electronic drills; wood Twist Drill Bit and Bits, 1/4" drive, suitable for power tools with DIN ISO 1173-D 6,3 receiver.

05104653001	
889/4/1 K	1 x 1/4"x50
849 HSS	1 x 3,0x70,0; 1 x 4,0x74,0; 1 x 5,0x85,0; 1 x 6,0x95,0; 1 x 8,0x110,0
855/1 TH PZ	2 x PZ 1x25; 3 x PZ 2x25; 1 x PZ 3x25
867/1 TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25

Bit-Check 10 Drywall 1



1 bit holder 896/4/1 out of Aluminium with adjustable depth stop suitable for power tools and electronic drills; screw depth can be infinitely adjusted and enables flush alignment of sunken screws; 9 drywall construction bits with modified drive shaft; length 25mm

05136011001	
896/4/1	1 x 1/4"x50
851/1 RZ PH	9 x PH 2x25

Tip



Bit holder with adjustable depth stop



The screw installation depth can be infinitely adjusted and allows the desired degree of countersinking of the screws.





Torque Tools



Series 7400
Adjustable torque screwdrivers

420



Series 7400
Pre-set, adjustable torque
screwdrivers

428



Series Torque-indicators

434



Series 7100
Dial torque wrenches

438



Series 7000
Torque wrenches

440



Series Insert Tools

444



Torque Tools

Wera's torque tools offer torque-controlled screw tightening so as to avoid damage to the screw or workpiece and to ensure the integrity of the screw connection. This makes work-intensive drilling-out of screws and unproductive downtimes a thing of the past. It is also important whenever repeat accuracy is required.

They come with an ergonomic Kraftform handle and have a distinctly audible and perceptible click signal whenever the required torque value is reached.

No time-consuming blade changes; instead of special blades, conventional bits conforming to C 6,3 and E 6,3 or even ¼" sockets can be used.



Adjustable torque screwdrivers

They can be adjusted by hand to the corresponding scale value. Also available in ESD version (also with take-up for HIOS/Halfmoon bits) and with Kraftform Micro handle. See page 420.

For the insulated VDE-version see page 98.

Pre-set, adjustable torque screwdrivers

Pre-set torque, adjustable within a defined range. Also available in ESD version (also for HIOS/Halfmoon bits) and with Kraftform Micro handle.

See page 428.



Torque-indicators

Suitable for applications requiring a non-adjustable i.e. a tamperproof torque blade assembly.
See page 434.



Dial torque wrenches

Suitable for robust applications requiring precision functions.
See page 438.



Torque wrenches

Suitable for controlled tightening using sockets.
See page 440.



Adjustable Torque Screwdrivers

Wera's adjustable torque screwdrivers allow variable torque settings with maximum precision and ensure that the user gets the very best results in the familiar Wera design with superior ergonomics.



Simple setting of the required torque by hand.



Easy-to-read scale value.




Measurement accuracy is $\pm 6\%$ in accordance with the standard DIN EN ISO 6789. Distinctly audible and noticeable excess-load signal when the pre-set torque is reached.

All Wera torque tools manufactured according to DIN EN ISO 6789 are supplied with a calibration certificate. Our workshop offers a comprehensive service for all Wera torque tools. Please contact us with any queries regarding service, recalibration or repair on +49 (0)202 40 45 145; Fax: +49 (0)202 40 45 158 or per E-Mail at: torqueservice@wera.de.



Rapidaptor technology makes the tool adaptable since bits and sockets can be exchanged rapidly.

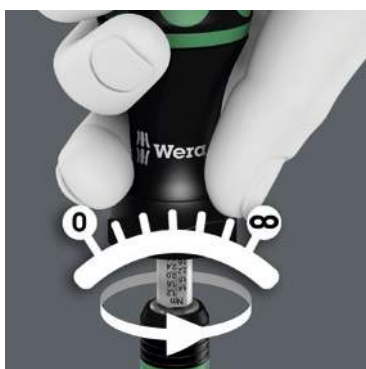

Unlimited torque for loosening seized screws.



Multi-component Kraftform handle with hard and soft zones for fast working speeds and protecting the palm of the hand.

For the insulated VDE-version see page 98.



Series 7400 Kraftform Torque Screwdrivers

Variable torque adjustment models

Series 7400 Kraftform adjustable torque screwdrivers (0.1-3.0 Nm) with Rapidaptor quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Accuracy: ±6 % (DIN EN ISO 6789). Numerical torque value scale, audible excess-load signal

Handle: Kraftform with non-roll feature, multi-component

	Art.No.	mm	Nm	Nm	mm	mm
05074770001 ¹⁾	7430	89	1/4"	0,10-0,34	0,015	142 5 7/16"
05074772001 ¹⁾	7431	89	1/4"	0,30-1,00	0,05	142 5 7/16"
05074774001 ¹⁾	7432	89	1/4"	0,90-1,50	0,05	142 5 7/16"
05074700001	7440	105	1/4"	0,3-1,2	0,05	155 6"
05074701001	7441	105	1/4"	1,2-3,0	0,10	155 6"

¹⁾ With attachable magnifying glass, dramatically improving visibility.

Series 7400 Kraftform pistol grip, adjustable torque screwdrivers (3.0-8.8 Nm) with Rapidaptor quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Accuracy: ±6 % (DIN EN ISO 6789). Numerical torque value scale, audible excess-load signal

Handle: Kraftform pistol grip, multi-component

	Art.No.							
		Nm	Nm	mm	mm			
05074702001	7442	1/4"	3,0-6,0	0,25	150	100	4"	1
05074705001	7443	1/4"	4,0-8,8	0,40	150	100	4"	1

Series 7400 Kraftform ESD adjustable torque screwdrivers (0.1-3.0 Nm) with Rapidaptor quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology, non-magnetic

Accuracy: ±6 % (DIN EN ISO 6789). Numerical torque value scale, audible excess-load signal

Handle: Kraftform with non-roll feature, multi-component

	Art.No.	mm	mm	Nm	Nm	mm	mm
05074780001 ¹⁾	7430 ESD	89	1/4"	0,10-0,34	0,015	142	5 7/16"
05074782001 ¹⁾	7431 ESD	89	1/4"	0,30-1,00	0,05	142	5 7/16"
05074784001 ¹⁾	7432 ESD	89	1/4"	0,90-1,50	0,05	142	5 7/16"
05074730001	7440 ESD	105	1/4"	0,3-1,2	0,05	155	6"
05074731001	7441 ESD	105	1/4"	1,2-3,0	0,10	155	6"

¹⁾ With attachable magnifying glass, dramatically improving visibility.



Rapidaptor

Rapid-in and self-lock



The bit can be pushed into the adaptor without moving the sleeve. The lock is activated automatically as soon as the bit is applied to the screw. Bits are held securely and wobble-free.

Rapid-out



Simply push the sleeve forward to change the bit. The spring mechanism lifts the bit off the magnet and unlocks the tool. The bit can be easily removed. The rapid-out function makes it easy to remove even the smallest bits without extra tools.

Chuck-all



The Rapidaptor quick-release chucks hold 1/4" DIN ISO 1173 C 6,3 and E 6,3 as well as Wera series 1 and 4 bits.

Single-hand function



Every function of the Rapidaptor quick-release chuck, such as inserting or releasing bits, can be carried out with one hand. This is faster, more economical and more ergonomic. There are no unnecessary manoeuvres.

Attachable magnifying glass



Articles 7430, 7431, 7432, 7430 ESD, 7431 ESD, 7432 ESD, 7435 ESD, 7436 ESD, 1430 ESD and 1431 ESD all come with a magnifying glass. This can be easily attached on to the scale, dramatically improving visibility.



Series 7400 Kraftform Torque Screwdrivers

Variable torque adjustment models

Series 7400 Kraftform pistol grip, adjustable torque screwdrivers (25.0-55.0 in. lbs.) with Rapidaptor quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Accuracy: ±6 % (DIN EN ISO 6789). Numerical torque value scale. Audible excess-load signal

Handle: Kraftform pistol grip, multi-component

	Art.No.							
		in. lbs.	in. lbs.	mm	mm			
05074712001	7447	1/4"	25,0-55,0	2,5	150	100	4"	1

Series 7400 Kraftform adjustable torque screwdrivers (2.5-29.0 in. lbs.) with Rapidaptor quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Accuracy: ±6 % (DIN EN ISO 6789). Numerical torque value scale. Audible excess-load signal

Handle: Kraftform with non-roll feature, multi-component

	Art.No.					
		in. lbs.	in. lbs.	mm		
05074710001	7445	1/4"	2,5-11,5	0,5	155	6"
05074711001	7446	1/4"	11,0-29,0	1,0	155	6"

Series 7400 Kraftform ESD adjustable torque screwdrivers (2.5-29.0 in.lbs.) with Rapidaptor quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology, non-magnetic

Accuracy: ±6 % (DIN EN ISO 6789). Numerical torque value scale. Audible excess-load signal

Handle: Kraftform with non-roll feature, multi-component

	Art.No.					
		in. lbs.	in. lbs.	mm		
05074733001	7445 ESD	1/4"	2,5-11,5	0,5	155	6"
05074734001	7446 ESD	1/4"	11,0-29,0	1,0	155	6"

Series 7400 Kraftform ESD adjustable torque screwdrivers (0.1-1.0 Nm)



Application: Suitable for bits with 4 mm Halfmoon drive (and Wera Serie 9) and 4 mm HIOS drive (and Wera Series 21)

Design: With quick-release chuck for rapid bit change

Accuracy: $\pm 6\%$ (DIN EN ISO 6789)

Handle: Kraftform with non-roll feature, multi-component

	Art.No.	mm	Nm	Nm	mm	
05074786001 ¹⁾	7435 ESD	89	0,10-0,34	0,015	142	5 ⁷ / ₁₆ "
05074788001 ¹⁾	7436 ESD	89	0,30-1,00	0,05	142	5 ⁷ / ₁₆ "

¹⁾ With attachable magnifying glass, dramatically improving visibility.

1430 Kraftform Micro ESD adjustable torque screwdrivers (0.02-0.11 Nm) with quick-release chuck



Application: Suitable for bits with 4 mm Halfmoon drive (and Wera Serie 9) and 4 mm HIOS drive (and Wera Series 21)

Design: With quick-release chuck for rapid bit change

Accuracy: $\pm 10\%$

Handle: Kraftform Micro with non-roll feature and rotating cap, multi-component

	Art.No.	Nm	Nm	mm	
05074802001 ¹⁾	1430 ESD	0,02-0,06	0,0025	141	5 ⁷ / ₁₆ "
05074804001 ¹⁾	1431 ESD	0,05-0,11	0,005	141	5 ⁷ / ₁₆ "

¹⁾ With attachable magnifying glass, dramatically improving visibility.


Tip

Attachable magnifying glass



Articles 7435 ESD, 7436 ESD, 1430 ESD and 1431 ESD, all come with a magnifying glass. This can be easily attached on to the scale, dramatically improving visibility.

Why does Wera manufacture adjustable Kraftform torque screwdrivers?



Many screws – particularly in assembly and maintenance applications – have to be tightened with controlled torque to ensure the dependability of the screw connection and/or to avoid damage to the screw or work piece. Wera's adjustable torque screwdrivers are the ideal tool for this. They feature a torque range of 0.3 Nm

to 8.8 Nm, two different handles, measurement accuracy of $\pm 6\%$ and Rapidaptor technology for rapid bit change.

For Halfmoon and HIOS Bits



The adjustable torque screwdrivers 7435 ESD, 7436 ESD, 1430 ESD and 1431 ESD feature a combination bitholder for both bits with Halfmoon and bits with HIOS drive.



Series 7400 Kraftform Torque Screwdrivers

Variable torque adjustment models

7440/41 Kraftform torque screwdriver set 0.3-3.0 Nm



05074738001		
●	7400	1 x 7440x1/4"x0,3-1,2; 1 x 7441x1/4"x1,2-3,0
⊗	867/1 TZ TORX®	1 x TX 6x25; 1 x TX 7x25; 1 x TX 8x25; 1 x TX 9x25; 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25
⊕	867/1 Z IP TORX PLUS®	1 x 6 IPx25; 1 x 7 IPx25; 1 x 8 IPx25; 1 x 9 IPx25; 1 x 10 IPx25; 1 x 15 IPx25; 1 x 20 IPx25; 1 x 25 IPx25; 1 x 30 IPx25
○	840/1 Z Hex-Plus	1 x 2,0x25; 1 x 2,5x25; 1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25

7440/41/42 Kraftform torque screwdriver set 0.3-6.0 Nm




05074739001		
●	7400	1 x 7440x1/4"x0,3-1,2; 1 x 7441x1/4"x1,2-3,0
●	7400 Pistole	1 x 7442x3,0-6,0
⊗	867/1 TZ TORX®	1 x TX 6x25; 1 x TX 7x25; 1 x TX 8x25; 1 x TX 9x25; 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25
⊕	867/1 Z IP TORX PLUS®	1 x 6 IPx25; 1 x 7 IPx25; 1 x 8 IPx25; 1 x 9 IPx25; 1 x 10 IPx25; 1 x 15 IPx25; 1 x 20 IPx25; 1 x 25 IPx25; 1 x 30 IPx25
○	840/1 Z Hex-Plus	1 x 2,0x25; 1 x 2,5x25; 1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25

7445/46/47 Kraftform torque screwdriver set 2.5-55.0 in.lbs.



05350451001		
●	7400 inch	1 x 7445x2,5-11,5; 1 x 7446x11,0-29,0
●	7400 Pistole inch	1 x 7447x25,0-55,0
⊗	867/1 TZ TORX®	1 x TX 6x25; 1 x TX 7x25; 1 x TX 8x25; 1 x TX 9x25; 1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25; 1 x TX 30x25
⊕	867/1 Z IP TORX PLUS®	1 x 6 IPx25; 1 x 7 IPx25; 1 x 8 IPx25; 1 x 9 IPx25; 1 x 10 IPx25; 1 x 15 IPx25; 1 x 20 IPx25; 1 x 25 IPx25; 1 x 30 IPx25
○	840/1 Z Hex-Plus	1 x 2,0x25; 1 x 2,5x25; 1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25


7443/61/9 Assembly set for tyre pressure control systems



05074745001		
●	7400 vor	1 x 7461x3,3 ¹⁾
●	7400 Pistole	1 x 7443x4,0-8,8
⊗	300 TX	1 x TX 10x1,4
⊕	870/1	1 x 1/4"x25
⊕	790 A/50	1 x 11,0x50,0; 1 x 12,0x50,0
⊕	867/4 TORX® HF	1 x TX 15x50; 1 x TX 20x50
○	327	1 x 32

¹⁾ Other pre-set values within the adjustable range <3.3 Nm can be delivered on request

7443/12 Assembly set for tyre pressure control systems



Suitable for all leading system suppliers such as Alligator, Beru, CUB, Herth & Buss, Schrader, VDO/Conti.

1 adjustable torque screwdriver, pistol handle, 4.0-8.8 Nm; 1 pre-set torque screwdriver 3.3 Nm; 1 pre-set torque screwdriver 1.4 Nm TX 10; 1 pre-set torque screwdriver 1.25 Nm TX 10; 1 valve dolly; 1 bit 867/4 HF TX 15 x 50 mm, with holding function for TORX® screws; 1 bit 867/4 HF TX 20 x 50 mm, with holding function for TORX® screws; 1 socket 790 A/50 SW 11.0 x 50 mm; 1 socket 790 A/50 SW 12.0 x 50 mm; 1 adaptor 870/1; 1/4" hexagon to 1/4" square; 1 valve insertion tool, pre-set torque: 0.25 Nm; 1 valve insertion tool, pre-set torque: 0.45 Nm.

Practically arranged in a robust foam insert.

05074746001	
●	7400 Pistole 1 x 7443x4,0-8,8
●	7400 vor 1 x 7461x3,3 ¹⁾
✱	300 TX 1 x TX 10x1,25; 1 x TX 10x1,4
●	790 A/50 1 x 11,0x50,0; 1 x 12,0x50,0
✱	867/4 TORX® HF 1 x TX 15x50; 1 x TX 20x50
⊗	870/1 1 x 1/4"x25
●	300 V 1 x 0,25; 1 x 0,45
○	327 1 x 32

¹⁾ Other pre-set values within the adjustable range < 3.3 Nm can be delivered on request

Tip

Assembly sets for tyre control systems




Suitable for all leading system suppliers like Alligator, Beru, CUB, Herth & Buss, Schrader, VDO/Conti. Including adjustable and pre-set torque tools, colour-coded valve insertion tool and valve dolly. The robust foam insert provides for a practical arrangement system.



Pre-set, adjustable Torque Screwdrivers

These tools are ideal for all applications where a constant, identical torque is required and where a high degree of repeat accuracy is needed. The torque value can be adjusted within the measuring range.

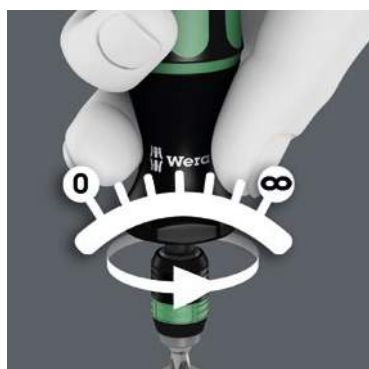

Unlimited torque for loosening seized screws.



Distinctly audible and noticeable excess-load signal when the pre-set torque is reached.



Rapidaptor technology makes the tool adaptable since bits and sockets can be exchanged rapidly.



Multi-component Kraftform handle with hard and soft zones for fast working speeds and protecting the palm of the hand.

All Wera torque tools manufactured according to DIN EN ISO 6789 are supplied with a calibration certificate. Our workshop offers a comprehensive service for all Wera torque tools. Please contact us with any queries regarding service, recalibration or repair on +49 (0)202 40 45 145; Fax: +49 (0)202 40 45 158 or per E-Mail at: torqueservice@wera.de.



Series 7400 Kraftform Torque Screwdrivers

Pre-set, adjustable torque models

Series 7400 Kraftform pre-set adjustable torque screwdrivers (0.1-3.0 Nm) with Rapidaptor quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Pre-set torque: 0.1 Nm, 0.3 Nm, 0.9 Nm, 1.2 Nm

Accuracy: ± 6% (DIN EN ISO 6789)

Handle: Kraftform with non-roll feature, multi-component

	Art.No.	mm	mm	Nm	Nm	mm	mm
05074790001 ¹⁾	7450	89	1/4"	0,1	0,1-0,34	133	5 1/4"
05074792001 ¹⁾	7451	89	1/4"	0,3	0,3-1,0	133	5 1/4"
05074794001 ¹⁾	7452	89	1/4"	0,9	0,9-1,5	133	5 1/4"
05074715001 ¹⁾	7460	105	1/4"	0,3	0,3-1,2	155	6"
05074716001 ¹⁾	7461	105	1/4"	1,2	1,2-3,0	155	6"

¹⁾ Other pre-set values within the adjustable range can be delivered on request

Series 7400 Kraftform pistol grip, pre-set adjustable torque screwdrivers (3.0-8.8 Nm) with Rapidaptor quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Pre-set torque: 3.0 Nm, 4.0 Nm

Accuracy: ± 6% (DIN EN ISO 6789)

Handle: Kraftform pistol grip, multi-component

	Art.No.	Nm	Nm	mm	mm	mm	mm
05074717001 ¹⁾	7462	1/4"	3,0	3,0-6,0	150	100	6"
05074728001 ¹⁾	7463	1/4"	4,0	4,0-8,8	150	100	6"

¹⁾ Other pre-set values within the adjustable range can be delivered on request

Serie 7400 Kraftform ESD pre-set adjustable torque screwdrivers (0.1-1.2 Nm) with Rapidaptor quick-release chuck



- Application:** Suitable for 1/4" DIN ISO 1173-C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4
- Design:** Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology
- Pre-set torque:** 0.1 Nm, 0.3 Nm, 0.9 Nm, 1.2 Nm
- Accuracy:** $\pm 6\%$ (DIN EN ISO 6789)
- Handle:** Kraftform with non-roll feature, multi-component

	Art.No.	 mm		 Nm	 Nm	 mm	 mm
05074820001 ¹⁾	7450 ESD	89	1/4"	0,1	0,1-0,34	133	5 1/4"
05074822001 ¹⁾	7451 ESD	89	1/4"	0,3	0,3-1,0	133	5 1/4"
05074824001 ¹⁾	7452 ESD	89	1/4"	0,9	0,9-1,5	133	5 1/4"
05074840001 ¹⁾	7460 ESD	105	1/4"	0,3	0,3-1,2	155	6"
05074842001 ¹⁾	7461 ESD	105	1/4"	1,2	1,2-3,0	155	6"

¹⁾ Other pre-set values within the adjustable range can be delivered on request

Tip

Why does Wera manufacture pre-set, adjustable Kraftform torque screwdrivers?



These torque screwdrivers are supplied with a fixed pre-set torque value. This is ideal for all applications that require constant, identical torque. They feature a pre-set torque range of 0.3 Nm to 4.0 Nm (adjustable between 0.3 Nm – 8.8 Nm), two different handles, measurement accuracy of $\pm 6\%$ and Rapidaptor chuck technology for rapid bit change.



Series 7400 Kraftform Torque Screwdrivers

Pre-set, adjustable torque models

Series 7400 Kraftform pre-set adjustable torque screwdrivers (2.5-29.0 in. lbs.) with Rapidaptor quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Pre-set torque: 2.5 in.lbs., 11.0 in.lbs.

Accuracy: ±6 % (DIN EN ISO 6789)

Handle: Kraftform with non-roll feature, multi-component

	Art.No.		in. lbs.	in. lbs.	mm	
05074720001 ¹⁾	7465	1/4"	2,5	2,5-11,5	155	6"
05074722001 ¹⁾	7466	1/4"	11,0	11,0-29,0	155	6"

¹⁾ Other pre-set values within the adjustable range can be delivered on request

Series 7400 Kraftform pistol grip, pre-set adjustable torque screwdriver (25.0-55.0 in. lbs.) with Rapidaptor quick-release chuck



Application: Suitable for 1/4" DIN ISO 1173-C 6,3 and E 6,3 hexagon insert bits and Wera Series 1 and 4

Design: Rapidaptor rapid-in, rapid-out, rapid-spin, chuck-all and single-hand technology

Pre-set torque: 25.0 in. lbs.

Accuracy: ±6 % (DIN EN ISO 6789)

Handle: Kraftform pistol grip, multi-component

	Art.No.		in. lbs.	in. lbs.	mm	mm	
05074721001 ¹⁾	7467	1/4"	25,0	25,0-55,0	150	100	6" 4"

¹⁾ Other pre-set values within the adjustable range can be delivered on request

Serie 7400 Kraftform pre-set adjustable torque screwdrivers (0.1-1.0 Nm) with quick-release chuck



- Application:** Suitable for bits with 4 mm Halfmoon drive (and Wera Serie 9) and 4 mm HIOS drive (and Wera Series 21)
- Design:** With quick-release chuck for rapid bit change
- Pre-set torque:** 0.1 Nm, 0.3 Nm
- Accuracy:** $\pm 6\%$ (DIN EN ISO 6789)
- Handle:** Kraftform with non-roll feature, multi-component

	Art.No.	mm	Nm	Nm	mm	
05074826001 ¹⁾	7455 ESD	89	0,015	0,1-0,34	138	5 1/4"
05074828001 ¹⁾	7456 ESD	89	0,035	0,3-1,0	138	5 1/4"

¹⁾ Other pre-set values within the adjustable range can be delivered on request

1460 Kraftform Micro ESD pre-set adjustable torque screwdrivers (0.02-0.11 Nm) with quick-release chuck



- Application:** Suitable for bits with 4 mm Halfmoon drive (and Wera Serie 9) and 4 mm HIOS drive (and Wera Series 21)
- Design:** With quick-release chuck for rapid bit change
- Pre-set torque:** 0.035 Nm, 0.05 Nm
- Accuracy:** $\pm 10\%$
- Handle:** Kraftform Micro with non-roll feature and rotating cap, multi-component

	Art.No.	Nm	Nm	mm	
05074800001 ¹⁾	1460 ESD	0,035	0,02-0,06	131	5 1/4"
05074810001 ¹⁾	1461 ESD	0,050	0,05-0,11	131	5 1/4"

¹⁾ Other pre-set values within the adjustable range can be delivered on request

Tip



ESD-safe tools



The requirements for ESD-safe screwdrivers are specified in the European standard DIN EN 61340-5-1. This standard also includes a handle that has to be out of a defined conductive material. The Wera products in the ESD series satisfy these standards and the even more stringent requirements demanded by some technology companies.

For Halfmoon and HIOS Bits



The adjustable torque screwdrivers 7455 ESD, 7456 ESD, 1460 ESD and 1461 ESD feature a combination bitholder for both bits with Halfmoon and bits with HIOS drive.



Torque-indicators

Wera torque-indicators have been factory pre-set to values recommended by leading carbide tool manufacturers. These tightening values relate specifically to the size of the TORX®, TORX PLUS® or hexagon socket screw. Torque indicators ensure safe and easy loosening of screw connections. Precision : $\pm 10\%$



Torque blade assembly precisely adjusted to the respective screw size for the TORX®, TORX PLUS® and hexagon socket screw profiles.




Non-adjustable and tamperproof.



Distinctly audible and noticeable excess-load signal when the pre-set torque is reached.



Slim 4 mm hexagon blades to reach screws in difficult-to-access places.

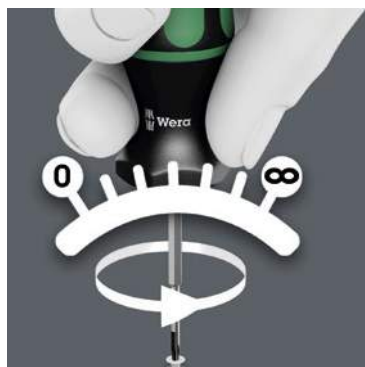

Unlimited torque for loosening seized screws.



Multi-component Kraftform handle with hard and soft zones for fast working speeds and protecting the palm of the hand.



Series

Torque-indicators

Pre-set torque models

300 Hex torque-indicator



Application: Hexagon socket screws

Pre-set torque: 1.4 Nm-3.0 Nm (1.0 ft.lb.-2.2 ft.lb.), fixed pre-sets

Accuracy: $\pm 10\%$

Blade: Hexagonal, 4 mm, reduced diameter tip

Design: Hex-Plus, Black Point

Handle: Kraftform with non-roll feature, multi-component

		Nm	ft. lb.					
		mm	mm	mm	mm	mm	mm	mm
05027910001	2,0	1,4	1,0	4	3,5	65	105	2 9/16"
05027911001	2,5	2,0	1,5	4	3,8	65	105	2 9/16"
05027912001	3,0	3,0	2,2	4	3,8	65	105	2 9/16"

300 IP TORX PLUS® torque-indicator



Application: TORX PLUS® socket screws

Pre-set torque: 0.6 Nm-3.0 Nm (0.4 ft.lb.-3.0 ft.lb.), fixed pre-sets

Accuracy: $\pm 10\%$

Blade: Hexagonal, 4 mm, reduced diameter tip

Design: Black Point

Handle: Kraftform with non-roll feature, multi-component

		Nm	ft. lb.					
		mm	mm	mm	mm	mm	mm	mm
05028040001	6 IP	0,6	0,4	4	3,5	65	105	2 9/16"
05028041001	7 IP	0,9	0,7	4	3,5	65	105	2 9/16"
05028042001	8 IP	1,2	0,9	4	3,5	65	105	2 9/16"
05028043001	9 IP	1,4	1,0	4	3,5	65	105	2 9/16"
05028044001	10 IP	2,0	1,5	4	3,8	65	105	2 9/16"
05028045001	15 IP	3,0	2,2	4	3,8	65	105	2 9/16"

300 Hex torque-indicator, pistol grip



Application: Hexagon socket screws

Pre-set torque: 5.0 Nm (3.7 ft. lb.), fixed pre-set

Accuracy: $\pm 10\%$

Blade: Hexagonal, 8 mm, reduced diameter tip

Design: Hex-Plus, Black Point

Handle: Kraftform pistol grip, multi-component

		mm	mm	mm	mm	mm	mm
05027913001	4,0	160	100	65	2 9/16"	25	1"

300 TX TORX® torque-indicator



Application: TORX® socket screws

Pre-set torque: 0.6 Nm-3.0 Nm (0.4 ft.lb.-2.2 ft.lb.), fixed pre-sets

Accuracy: $\pm 10\%$

Blade: Hexagonal, 4 mm, reduced diameter tip

Design: Black Point

Handle: Kraftform with non-roll feature, multi-component

		Nm	ft. lb.					
		mm	mm	mm	mm	mm	mm	mm
05027930001	TX 6	0,6	0,4	4	3,5	65	105	2 9/16"
05027931001	TX 7	0,9	0,7	4	3,5	65	105	2 9/16"
05027932001	TX 8	1,2	0,9	4	3,5	65	105	2 9/16"
05027933001	TX 9	1,4	1,0	4	3,5	65	105	2 9/16"
05027934001	TX 10	2,0	1,5	4	3,8	65	105	2 9/16"
05027935001	TX 15	3,0	2,2	4	3,8	65	105	2 9/16"

300 IP TORX PLUS® torque-indicator, pistol grip



Application: TORX PLUS® socket screws
Pre-set torque: 5.0 Nm (3.7 ft. lb.), fixed pre-set
Accuracy: ±10 %
Blade: Hexagonal, 8 mm, reduced diameter tip
Design: Black Point
Handle: Kraftform pistol grip, multi-component

							
		mm	mm	mm	mm	mm	mm
05028046001	20 IP	160	100	65	2 9/16"	25	1"

300 TX TORX® torque-indicator, pistol grip



Application: TORX® socket screws
Pre-set torque: 5.0 Nm (3.7 ft. lb.), fixed pre-set
Accuracy: ±10 %
Blade: Hexagonal, 8 mm, reduced diameter tip
Design: Black Point
Handle: Kraftform pistol grip, multi-component

							
		mm	mm	mm	mm	mm	mm
05027936001	TX 20	160	100	65	2 9/16"	25	1"

Tip

Less is often more



Some screw connections require specific torque values so that they can be tightened or loosened easily. Wera torque-indicators are pre-set to torque values recommended by leading carbide tool manufacturers. Pre-set torque between 0.6 Nm and 5.0 Nm, for TORX®, TORX PLUS® and hexagon socket screws, unlimited loosening torque, two handles, tamper-proof.



Serie 7100

Dial torque wrenches with drag pointer

Wera dial wrenches combine precision with a robust and application-optimised ergonomic design. Torsion forces are recorded by an integrated mechanism in the wrench.



The torque value reached is shown by an integrated drag indicator on an easy-to-read scale.



Range up to 1300 Nm.



Suitable for right and left-hand direction.

All Wera torque tools manufactured according to DIN EN ISO 6789 are supplied with a calibration certificate. Our workshop offers a comprehensive service for all Wera torque tools. Please contact us with any queries regarding service, recalibration or repair on +49 (0)202 40 45 145; Fax: +49 (0)202 40 45 158 or per E-Mail at: torqueservice@wera.de.

Series 7100

Dial torque wrenches with drag pointer

7100 A-B Series dial torque wrenches with drag pointer



7111 A DS



7113 A DS
7112 B DS

Design: Fixed square drive, reading accuracy of $\pm 3\%$

Application: Hexagon sockets (according to ISO 2725 part 1+3), can be used in both right and left-hand direction

	Art.No.													
			Nm	Nm	lbf. in.	lbf. in.	mm	mm	mm	mm	mm	mm	mm	mm
05077000001	7111A DS	$\frac{1}{4}$ "	0-6	0,10	0-50	1,00	262	91	171	75,5	45	$3\frac{19}{32}$ "	7"	$1\frac{49}{64}$ "
05077001001	7112B DS	$\frac{3}{8}$ "	0-15	0,25	0-130	2,00	262	91	171	75,5	47	$3\frac{19}{32}$ "	7"	$1\frac{27}{32}$ "
05077002001	7113B DS	$\frac{3}{8}$ "	0-70	1,00	0-600	10,00	313	143	171	75,5	47	$5\frac{33}{64}$ "	7"	$1\frac{27}{32}$ "

7100 C-F Series dial torque wrenches with drag pointer



7114 C DS
7115 C DS



7117 F DS

Design: Fixed square drive, reading accuracy of $\pm 3\%$

Application: Hexagon sockets (according to ISO 2725 part 1+3), can be used in both right and left-hand direction

	Art.No.													
			Nm	Nm	lbf. ft.	lbf. ft.	mm	mm	mm	mm	mm	mm	mm	mm
05077003001	7114C DS	$\frac{1}{2}$ "	0-200	2,50	0-145	2,50	528	263	265	58	75,5	$10\frac{23}{64}$ "	$10\frac{7}{16}$ "	$2\frac{21}{64}$ "
05077004001	7115C DS	$\frac{1}{2}$ "	0-350	5,00	0-250	5,00	528	263	265	58	75,5	$10\frac{23}{64}$ "	$10\frac{7}{16}$ "	$2\frac{21}{64}$ "
05077005001	7116E DS	$\frac{3}{4}$ "	0-800	10,00	0-580	10,00	550*	270	280	71	82	$11\frac{1}{32}$ "	$10\frac{5}{8}$ "	$2\frac{51}{64}$ "
05077006001	7117F DS	1"	0-1300	25,00	0-950	25,00	550**	270	280	76	82	$11\frac{1}{32}$ "	$10\frac{5}{8}$ "	$2\frac{63}{64}$ "

* incl. extension: 1120 mm

** incl. extension: 1820 mm



Series 7000

Torque Wrenches

Wera Series 7000 – the classic torque wrench: the successful combination of robust design, simple setting of the desired limit value as well as rapid changeover of the ratcheting direction.

When the set value is reached, a distinctly audible and perceptible signal is triggered, following which the wrench is immediately ready for use once again.




Very robust design with great accuracy as per DIN EN ISO 6789.



Simple adjustment and locking of the pre-set value on an easy-to-read scale.



Release signal when the value is reached.

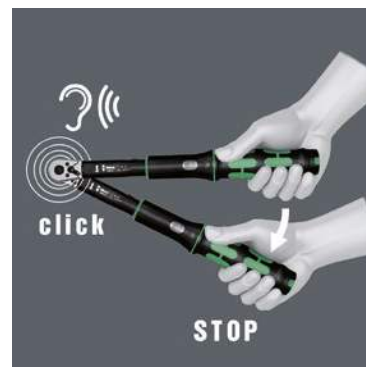

Suitable for right and left-hand direction.



Reversible ratchet, push through ratchet or fitting for interchangeable insert tools.



Range up to 1500 Nm.

All Wera torque tools manufactured according to DIN EN ISO 6789 are supplied with a calibration certificate. Our workshop offers a comprehensive service for all Wera torque tools. Please contact us with any queries regarding service, recalibration or repair on +49 (0)202 40 45 145; Fax: +49 (0)202 40 45 158 or per E-Mail at: torqueservice@wera.de.



Wera
7000 A 1-25 Nm
1.5-16 lbf. ft.

5

70



Series 7000

Adjustable torque wrenches.

7000 Series torque wrenches with reversible ratchet



7000 A



7000 B



7001 C



7003 C



7006 E

Design: Reversible ratchet, reading accuracy of ± 4 % of set value, 7000 A: ± 3 %, as per ISO 6789 / EN 26789

Application: Can be used in right-hand direction

	Art.No.															
			Nm	Nm	lbf. ft.	lbf. ft.	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
05075393001	7000 A	1/4"	1-25	0,10	1,5-18	≈0,10	291	112	179	26	22,5	35	4 13/32"	7 3/64"	3/4"	1"
05075394001	7000 B	3/8"	8-60	1	5-45	1,00	310	167	140	31	33	36	6 37/64"	5 33/64"	1 7/32"	1 19/64"
05075400001	7000 C	1/2"	8-60	1	5-45	1,00	310	167	140	31	38	36	6 37/64"	5 33/64"	1 7/32"	1 29/64"
05075405001	7001 B	3/8"	20-100	1	15-80	1,00	350	167	180	31	33	36	6 37/64"	7 3/32"	1 7/32"	1 19/64"
05075401001	7001 C	1/2"	20-100	1	15-80	1,00	350	167	180	31	38	36	6 37/64"	7 3/32"	1 7/32"	1 29/64"
05075402001	7003 C	1/2"	40-200	2	30-150	2,00	445	167	275	44	43	36	6 37/64"	10 53/64"	1 47/64"	1 47/64"
05075415001 ¹⁾	7005 C	1/2"	60-300	5	45-220	5,00	572	167	405	50,5	46	36	6 37/64"	15 15/16"	1 31/32"	1 13/16"
05075403001 ²⁾	7006 E	3/4"	80-400	10	60-295	10,00	684	167	517	50,5	52	36	6 37/64"	20 23/64"	1 31/32"	2 3/64"

¹⁾ With push-through square. For both right and left direction

²⁾ For both right and left direction

7000 Series torque wrenches for insert tools



7000 BVK



7001 VK



7003 VK



7005 VK

Design: Interchangeable tools, reading accuracy of ± 4 % of set value, as per ISO 6789 / EN 26789

Application: Right and left-hand direction

															
	Art.No.		Nm	Nm	lbf. ft.	lbf. ft.	mm	mm	mm	mm	mm	mm	mm	mm	mm
05075396001	7000 BVK	9x12	8-60	1	5-45	1,00	305	167	136	22,5	36	6 ³⁷ / ₆₄ "	5 ²³ / ₆₄ "	²⁵ / ₃₂ "	1 ²⁷ / ₆₄ "
05075407001	7001 VK	9x12	20-100	1	15-80	1,00	345	167	178	22,5	36	6 ³⁷ / ₆₄ "	7 ¹ / ₆₄ "	²⁵ / ₃₂ "	1 ²⁷ / ₆₄ "
05075412001	7003 VK	14x18	40-200	2	30-150	2,00	430	167	265	28	36	6 ³⁷ / ₆₄ "	10 ⁷ / ₁₆ "	1 ⁷ / ₆₄ "	1 ²⁷ / ₆₄ "
05075417001	7005 VK	14x18	60-330	5	45-250	5,00	662	167	495	28	36	6 ³⁷ / ₆₄ "	19 ³¹ / ₆₄ "	1 ⁷ / ₆₄ "	1 ²⁷ / ₆₄ "

7000 Series torque wrenches with push-through square



7007 E



7008 E



7009 F

Design: Push-through square, reading accuracy of ±4 % of set value, as per ISO 6789 / EN 26789
Application: Right and left-hand direction

																		
	Art.No.		Nm	Nm	lbf. ft.	lbf. ft.	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
05075420001	7007 E	$\frac{3}{4}$ "	130-650	5	100-480	5,00	886	380	506	65	56	80	14 $\frac{61}{64}$ "	19 $\frac{59}{64}$ "	2 $\frac{9}{16}$ "	2 $\frac{13}{64}$ "		
05075425001	7008 E	$\frac{3}{4}$ "	300-1000	10	220-750	10,00	1250*	380	870	75	59	80	14 $\frac{61}{64}$ "	34 $\frac{1}{4}$ "	2 $\frac{61}{64}$ "	2 $\frac{21}{64}$ "		
05075430001 ¹⁾	7009 F	1"	500-1500	10	370-1100	10,00	1580*	280	1200	75	67	80	14 $\frac{61}{64}$ "	47 $\frac{1}{4}$ "	2 $\frac{61}{64}$ "	2 $\frac{41}{64}$ "		

¹⁾ With ratchet
²⁾ incl. extension



Series Insert Tools

Suitable for Series 7000 torque wrenches.

7772 Ratchet insert, reversible



Fitting 9 x 12 mm

	Art.No.					
	Art.No.					mm
05078185001	7772 A	1/4"	22	21,0	18,5	45,0
05078190001	7772 B	3/8"	33	36,0	18,5	50,0
05078195001	7772 C	1/2"	33	40,0	18,5	50,0

7783 Square drive insert



Fitting 14 x 18 mm

	Art.No.					
	Art.No.					mm
05078345001	7783C	1/2"	30	38,0	26,0	63,0

7773 Square drive insert



Fitting 9 x 12 mm

	Art.No.					
	Art.No.					mm
05078200001	7773 A	1/4"	21,0	22,0	18,5	43,5
05078205001	7773 B	3/8"	21,0	26,0	18,5	43,5
05078210001	7773 C	1/2"	21,0	30,5	18,5	43,5

7782 Ratchet insert, reversible



Fitting 14 x 18 mm

	Art.No.					
	Art.No.					mm
05078340001	7782C	1/2"	43,0	42,0	26,0	72,0





Impact Driver and Soft-faced Hammers



Impact Driver

448



Soft-faced Hammers

450



Impact drivers

It has to be possible that even the most seized screw can be loosened.

Impact drivers are the solution whenever manual power is insufficient and a pneumatic screwdriver is not to hand. The Wera impact driver has particularly high efficiency thanks to its robust double-curved design. Impact forces are converted into rotary motion and so there is no need for the use of pneumatic appliances.



Seized screws can be loosened or tightened without power tools.



The double-curved design is particularly efficient.



2090 Impact driver 90 Nm



Application: Screws M 4 - M 8
Output: $\frac{5}{16}$ " hexagon socket

		
	mm	
05072014001	142,0	5 $\frac{19}{32}$ "

2090/17 Impact driver set



17-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1x 2090 impact driver 90 Nm, $\frac{5}{16}$ " hexagon socket; 1 adaptor $\frac{5}{16}$ " external hexagon/ $\frac{3}{8}$ " external square, 1 adaptor $\frac{5}{16}$ " external hexagon/ $\frac{1}{2}$ " external square, 14 bits

		
05072017001		
	2090 90 Nm	1 x 142,0
	851/2 Z PH	1 x PH 2x32; 1 x PH 3x32
	851/2 PH	1 x PH 4x32
	800/2	1 x 2,0x12,0x41
	840/2 Z	1 x 5x30; 1 x 6x30; 1 x 8x30; 1 x 10x30
	840/2	1 x 7,0x30
	867/2 Z TORX®	1 x TX 30x35; 1 x TX 40x35; 1 x TX 45x35; 1 x TX 50x35; 1 x TX 55x35
	870/2	1 x 3/8"x5/16"; 1 x 1/2"x5/16"



Soft-faced hammers

Powerful hammering with surface protection.



They come in soft, medium and hard designs for a wide range of applications from universal use to splinter-free applications on sharp-edged work pieces.



Powerful work is ensured with handles out of high quality ash wood.



Colour guidance system

- Yellow = Repair/maintenance work with high demands
- Red = Suitable for hammering sharp-edged work pieces; bodyshops, automotive, engineering
- White = Suitable for metal processing and removal of dents; tent, large building and exhibition stand construction



The double-sided conical design creates an unbreakable and secure link between the handle and head of the hammer.



Versatile use thanks to the soft faced heads that can be retrospectively fitted.





Series Soft-Faced Hammers

Powerful hammering with surface protection

100 Soft-faced hammer with Cellidor head sections



Application: Demanding repair/maintenance work

Head: Cellidor, hard

Handle: Ashwood

	#	 mm	 mm	 mm
05000005001	1	22	75	250,0
05000010001	2	27	90	265,0
05000015001	3	32	95	280,0
05000020001	4	35	105	290,0
05000025001	5	40	110	320,0
05000030001	6	50	115	340,0
05000035001	7	60	135	380,0

101 Soft-faced hammer with nylon head sections



Application: Metal processing, removal of dents as well as tent, large building and exhibition stand construction

Head: Nylon, very hard

Handle: Ashwood

	#	 mm	 mm	 mm
05000305001	1	22	75	250,0
05000310001	2	27	90	265,0
05000315001	3	32	95	280,0
05000320001	4	35	105	290,0
05000325001	5	40	110	320,0
05000330001	6	50	115	340,0
05000335001	7	60	135	380,0

102 Soft-faced hammer with urethane head sections



Application: Bodyshops, automotive, engineering

Head: Urethane, medium-hard

Handle: Ashwood

	#	 mm	 mm	 mm
05000505001	1	22	75	250,0
05000510001	2	27	90	265,0
05000515001	3	32	95	280,0
05000520001	4	35	105	290,0
05000525001	5	40	110	320,0
05000530001	6	50	115	340,0
05000535001	7	60	135	380,0

100 S Replacement ashwood handles for hammers 100, 101, 102



	#	 mm
05000205001	1	250,0
05000210001	2	265,0
05000215001	3	280,0
05000220001	4	290,0
05000225001	5	320,0
05000230001	6	340,0
05000235001	7	380,0

100 L Replacement head sections out of Cellidor for hammer 100



Application: Demanding repair/maintenance work

	#	
05000105001	1	22,0
05000110001	2	27,0
05000115001	3	32,0
05000120001	4	35,0
05000125001	5	40,0
05000130001	6	50,0
05000135001	7	60,0

101 L Replacement head sections out of nylon for hammer 101



Application: Metal processing, removal of dents as well as tent, large building and exhibition stand construction

	#	
05000405001	1	22,0
05000410001	2	27,0
05000415001	3	32,0
05000420001	4	35,0
05000425001	5	40,0
05000430001	6	50,0
05000435001	7	60,0

102 L Replacement head sections out of urethane for hammer 102



Application: Bodyshops, automotive, engineering

	#	
05000605001	1	22,0
05000610001	2	27,0
05000615001	3	32,0
05000620001	4	35,0
05000625001	5	40,0
05000630001	6	50,0
05000635001	7	60,0





TechLex - Technical data and information

Wera ABC	456
TORQUE Test Values	460
Dimensions Of Profiles	461
Which Drive Is Suitable For Which Machine?	462
Connector Tools	464
Tool Selector	466
TORQUE Conversion Table	470
Conversion Of Inches To Millimeters	471
Standard TORQUE Values	472
Three Part Driver System	473
Code No. Index	474
Article No. Index	488
Alphabetical Index	498



Wera ABC

Bit-Check

We have had bit ranges in our programme for many years now. In 2016, we put a question mark against everything and came up with a game changer. We wanted bit ranges with bits whose profiles and sizes could be more easily recognised. We wanted bit ranges that were as compact as possible and which were Wera-like at a first glance. We wanted bit ranges with bits that could be removed and reinserted more easily. We wanted bit ranges with as little weight as possible. The new multi-component Bit-Checks satisfy these requirements; the soft material in the lower section of the Bit-Checks ensures that the bits are firmly held yet easy to remove.

BiTorsion

BiTorsion bits have a tempered torsion zone that diverts the kinetic energy of peak loads away from the drive tip. This greatly reduces the risk of breakage and significantly extends the tools' service life. To find these bits in the catalogue look for the letter B after the article number. BiTorsion holders have a torsion zone that diverts the kinetic energy of peak loads away from the drive tip. The combined use of both the BiTorsion bit and holder increases the service life of the tools considerably and thus ensures higher productivity. BiTorsion bits and holders can, however, be used independently of each other and with conventional tools.

Bits, diamond coated

Please see -> diamond coated bits

Bits, extra hard

Please see -> extra hard bits

Bits, titanium nitride coated

Please see -> Titanium nitride coated bits

Bits, tough absorbing

Please see -> tough absorbing bits

BlackLaser

BlackLaser hardened blades for excellent surface protection and a long service life. High corrosion protection.

Black Point Tip

The Wera Black Point tip and a refined hardening process guarantee a long service life and increased corrosion protection.

Chiseldriver

The chiseldriver is the solution for jobs that require more than just screwdriving. For fastening, chiselling and loosening seized screws or hose clamps. With an integrated impact cap that extends service life and reduces the risk of splintering. With a pound-thru hexagon blade made from high-grade material for zero-loss transfer of high forces when struck with a hammer. The tough viscous tempered material prevents the blade from splintering or breaking. More TORQUE can be transferred by attaching an open-jawed or ring spanner to the integrated hexagon bolster.

Diamond coated bits

The minute diamond particles on the tip of the bit literally bite into the screw. The secure hold means that less contact pressure is required, which reduces the risk of slipping. To find diamond coated bits in the catalogue look for the letters DC after the article number.

Extra hard bits

Ideal for soft screwdriving. TORQUE increases continuously without any peaks during fastening until the head of the screw reaches the surface of the material. Extra hard bits are made from a special material that extends the tools' service life and reduces the risk of material breakage. To find these bits in the catalogue look for the letter H after the article number.

Flexible Lock System

All rigid Zyklop extensions are fitted with a freewheel sleeve which lets you tighten and loosen screws and bolts quickly and effectively. The premium extensions are also fitted with the flexible lock system. With this system activated, drive handles can be attached permanently to the extension, preventing slipping or accidental loss of the tool. When the system is deactivated the sockets can be attached as usual and changed in a flash.

Hex-Plus Profile

The problem with hexagon socket screws is the easily “rounded” screw recess. This is caused by the sharp edges of the tool pressing against the inside of the screw profile. Gradual wear eventually grinds and destroys the head of the screw. Wera’s Hex-Plus tools provide more contact surface inside the screw profile, which reduces the notching effect and ultimately the deformation of the screw. Hex-Plus tools can also transfer up to 20 % more TORQUE.

Impact bits

Impact bits are designed for use in powerful impact screwdrivers. Impact bits were specifically developed to withstand high power tool forces.

Individual Testing

Our VDE screwdrivers are tested for dielectric strength under a 10,000-volt load in a water bath to make sure that their most important property, their insulation, has been adequately tested. Each individual Wera VDE screwdriver is subjected to this test to guarantee safe working up to 1,000 volts.

Koloss

The ratchet that can also be used officially as a hammer. The Koloss can be used as a reversible, heavy-duty, fine action ratchet that can withstand loads of at least 600 Nm.

Kraftform Handle

The Kraftform handle has been designed to fit snugly in your hand, making blisters and calluses a thing of the past even after long-term use. The hard materials used for the handle promote fast grip adjustments and prevent the skin from sticking to the handle. The softer, anti-slip zones facilitate zero-loss transfer of high forces. This is an unbeatable combination! Work is done with a flick of the wrist!

Kraftform Kompakt

Wera’s compact tools are suitable for manual or machine use. The type of operation often becomes clear only after you’ve arrived at the site. The compact handle/interchangeable blade system offers you mobility and flexibility. The sets come with a Kraftform handle, quick-release chuck and bits for manual and machine use. The handle/interchangeable blade system permits rapid tool changes for a wide range of applications. Tools can be stored and carried in a strong plastic box or a robust belt pouch so that they are always at hand. The sets of series 20 have hidden depths: a telescopic blade that retracts into the handle (which can also be removed and attached to a power tool as a bit holder) and an integrated bit magazine. Rapidaptor technology ensures rapid bit changes.

Kraftform Micro

The three-zone concept of Kraftform Micro screwdrivers reduces fastening times and the cost per screw connection. The hand support on the easy-turning cap and the fast-turning zone below the cap accelerate the screwdriving process. This makes time-consuming grip adjustments, which are required with conventional precision screwdrivers, unnecessary. The power zone has integrated soft zones near the tip of the blade to transfer high tightening or loosening forces without losing contact with the screw. The precision zone directly above the blade provides a better feel for the rotation angle during fine adjustment work. The Wera Black Point tip and a refined hardening process guarantee a long service life and increased corrosion protection.

Lasertip

Wera Lasertip screwdrivers have been microscopically roughened by a laser. This rough surface literally “bites” into the head of the screw. Accidental slipping becomes a thing of the past.

Low-temperature Impact Strength

VDE tools are often used under extreme conditions, such as very low temperatures. Safety must be guaranteed even under these conditions. The plastics used for the handle of Wera VDE screwdrivers are guaranteed to meet the more stringent test requirements for low-temperature impact strength at -40 °C.

Multi-component Screwdriver Handle

The Kraftform handle has been designed to fit snugly in your hand, making blisters and calluses a thing of the past even after long-term use. The hard materials used for the handle promote fast grip adjustments and prevent the skin from sticking to the handle. The softer, anti-slip zones facilitate zero-loss transfer of high forces. This is an unbeatable combination! Work is done with a flick of the wrist!

Wera ABC

Rapidaptor

Wera developed the Rapidaptor that allows you to change bits quickly with just one hand and without extra tools.

Rapid-in and self-lock

The bit can be pushed into the adaptor without moving the sleeve. The lock is activated automatically as soon as the bit is applied to the screw. Bits are held securely and wobble-free.

Rapid-out

Simply push the sleeve forward to change the bit. The spring mechanism lifts the bit off the magnet and unlocks the tool. The bit can be easily removed. The rapid-out function makes it easy to remove even the smallest bits without extra tools.

Rapid-spin

The free-spinning outer sleeve stabilises battery or mains-powered tools during the screwdriving process. This makes it easier to apply the tool to the screw and prevents slipping.

Chuck-all

The Rapidaptor quick-release chucks hold ¼"

DIN ISO 1173 C 6,3 and E 6,3 as well as Wera series

1 and 4 bits.

Single-hand function

Every function of the Rapidaptor quick-release chuck, such as inserting or releasing bits, can be carried out with one hand. This is faster, more economical and more ergonomic. There are no unnecessary manoeuvres.

Rapidaptor with ring magnet

The floating, free-spinning magnetic sleeve holds even large and heavy screws very securely for fast application, eliminating the need to hold the screw, which can be dangerous and painful. Perfect for overhead work.

SPKL L-keys

L-keys with a rubber sleeve (SPKL) are made from easy-to-grip round bars. The sleeve ensures comfortable and safe working even at low temperatures. High corrosion protection.

Stainless Steel Tools

Wera Stainless tools are made from 100 % stainless steel. Their wear debris consists of rustproof stainless steel particles, which prevents unsightly extraneous rust. Wera stainless steel tools are vacuum ice-hardened to give them the necessary hardness and rigidity for industrial applications.

Take it easy Tool Finder

"Take it easy" tool finder with colour coding according to sizes – for simple and rapid accessing of the required tool.

Titanium nitride coated bits

Industrial applications are subject to permanent stresses that place high demands on the durability of the tool. Bits for these applications are coated with extremely hard titanium nitride. This abrasion-proof coating provides the necessary hardness that is required on a mass production line.

TORQ-SET® Mplus

Wera developed the Mplus profile with stronger flanks compared with tools with a conventional TORQ-SET® profile. This results in approximately 70 % extra torsional strength and greatly extends the service life of Wera Mplus tools.

TORQUE-indicators

Wera TORQUE-indicators have been factory pre-set to TORQUE values recommended by leading carbide tool manufacturers. Tightening values are precisely related to the size of the TORX®, TORX PLUS® or hexagon socket screw. TORQUE-indicators ensure safe and easily loosened screw connections.

TORQUE Screwdrivers

Adjustable TORQUE screwdrivers:

TORQUE can be set to the required scale value by hand without special tools.

Pre-set adjustable TORQUE screwdrivers:

With pre-set TORQUE, adjustable within a defined range.

Torsion bits

By diverting TORQUE peaks into the Torsion zone of the bit, premature wear and tear is avoided and dramatically improved service life is achieved.

TORX® B0 with borehole

TORX® tools with a borehole prevent the unauthorised unfastening of safety screws. The screws contain a pin that protrudes into the drive profile so that "normal" TORX® tools cannot be used. This pin fits into the borehole of TORX® B0 tools allowing safety screws to be unfastened.

TORX® with holding function (HF)

The optimised profile wedges the screw to the tool. This is very important in situations where a magnetic screw holder cannot or must not be used (for instance, jobs involving power tools where metal filings attracted by a magnet could affect the screwdriving process, or jobs requiring wedging forces and stainless steel tools, which are non-magnetic because of the nature of the material). The wedging effect can be guaranteed only for tools made to Acument Global Technologies Inc. specifications.

TORX® with pin

The protruding pin that fits into the borehole of the screw makes it easier to centre the tool in the screw recess.

TORX® Wedge

The conical TORX® profile provides a better fit in the screw. Combined with a great recess depth this produces a pinch effect.

TORX PLUS®

Compared with the “normal”, round TORX® profile the elliptical profile of TORX PLUS® tools makes it possible to increase the size of the 6 flanks that transfer TORQUE between the tool and the screw. The force applied by the user is distributed across a larger surface area allowing more TORQUE to be transferred and extending the service life of both the screw and the tool.

TORX PLUS® IPR

A 5-flank TORX PLUS® profile with a borehole. This drive geometry has only five flanks instead of the usual six and a borehole to protect safety screws against unauthorised unfastening. The screws cannot be turned with conventional, widely available tools.

Tough absorbing bits (Z)

Tough absorbing bits for hard materials, e.g. sheet steel or metal. Here the screw initially turns smoothly inside the defined thread. As soon as the head of the screw touches the surface of the material large amounts of peak TORQUE are generated that affects both the screw and the tool. Bits that are too hard are likely to break under these conditions.

Two-component clip for L-keys

The durable clip material ensures that L-keys are securely fixed and easy to remove. Abrasion resistant markings help you find the right size tool straight away.

Zyklop ratchets

Zyklop Speed – A really fast mover.

Zyklop Hybrid – Combines robustness, slim design, and little weight.

Zyklop Metal – Extremely slim. Long leverage.

Zyklop Mini – rapid fastening even in confined working situations.

Zyklop Mini 1

The strong ¼" Bit Ratchet that can withstand at least 65 Nm. Suitable for bits directly driven and sockets (using adaptor). Fine tooth mechanism with 60 teeth, simple switching between left/right operations. Ideal for very confined spaces, where conventional screwdrivers are just too big. Drop-forged full steel design.

TORQUE Test Values



Slotted Tools

Drives: DIN ISO 2380, VSM 35601.
TORQUE values evaluated in test gages according to DIN ISO 2380 on TORQUE testing equipment.

 a x b mm	TORQUE in Nm (min)	
	handuse	poweruse
0,3 x 2,0	0,18	0,20
0,4 x 2,0	0,30	0,35
0,4 x 2,5	0,40	0,45
0,5 x 3,0	0,70	0,80
0,5 x 3,5	0,90	0,98
0,6 x 3,5	1,30	1,40
0,6 x 4,0	1,40	1,61
0,6 x 4,5	-	1,80
0,8 x 4,0	2,60	2,90
0,8 x 4,5	2,88	
0,8 x 5,0	3,20	3,58
0,8 x 5,5	3,50	3,90
1,0 x 5,5	5,50	6,20
1,0 x 6,5	6,50	7,28
1,0 x 7,0	7,0	7,80
1,2 x 6,5	9,40	10,50
1,2 x 7,0	10,0	11,28
1,2 x 8,0	11,5	12,90
1,4 x 9,0	17,6	19,70
1,5 x 13	29	32
1,6 x 8,0	20,5	22,9
1,6 x 9,0	23	25
1,6 x 10	25,6	28,7
2,0 x 12	48,0	53
2,0 x 13	52	58
2,5 x 14	87	98
2,5 x 16	100	112
3,0 x 18	162	181

Important device:

After TORQUE testing with the minimum value, screwdrivers shall not show any deformation or injuries at the tip.



Hexagon Tools

Drives: DIN ISO 2936. TORQUE values evaluated in test gages according to DIN ISO 2936 on TORQUE testing equipment.

 SW (mm)	TORQUE in Nm (min)
0,7	0,08
0,9	0,18
1,3	0,53
1,5	0,82
2,0	1,9
2,5	3,8
3	6,6
3,5	11
4	16
4,5	24
5	30
6	52
7	78
8	120
9	180
10	220
11	295
12	370
13	480
14	590
17	1000
19	1000
22	1000
24	1000
27	1000



PH and PZ Tools

Drives: DIN 5260, ISO 8764 and SMS-SS 1687.
TORQUE values evaluated in test gages according to DIN 5261, ISO 8764 on TORQUE testing equipment.

 	TORQUE in Nm (min)	
	handuse	poweruse
0	1,0	1,0
1	3,5	3,9
2	8,2	10,3
3	19,5	32,0
4	38,0	88,7



Tools with TORX® and TORX PLUS® drive

TORQUE values evaluated with testing gages of Acument Global Technologies Inc., licensor of TORX® and TORX PLUS®.

 	TORQUE in Nm (min.)			TORX PLUS®		
	Bit	Resis-Bit	Screw-driver	Bit	Resis-Bit	Screw-driver
1	0,10	-	0,08	0,11		
2	0,14	-	0,12	0,16		
3	0,25	-	0,21	0,28		
4	0,37	-	0,31	0,44		
5	0,51	-	0,43	0,61		
6	0,91	-	0,75	1,11		0,92
7	1,7	1,4	1,4	2,10		1,68
8	2,6	2,2	2,2	3,21	2,5	2,79
9	3,4	2,9	2,8	4,19	3,3	3,49
10	4,5	3,8	3,7	5,42	4,3	4,47
15	7,7	6,5	6,4	9,62	7,3	8,06
20	12,7	10,8	10,5	16,15	11,9	13,41
25	19,0	16,1	15,9	23,50	17,4	19,58
27	26,9	22,9	22,5	34,62	25,1	28,95
30	37,4	31,8	31,1	47,18	33,5	39,34
40	65,1	55,3	54,1	82,08	59,4	68,40
45	104	88	86	137,38	97,3	114,44
50	159	135	132	194,54	152,4	162,14
55	257	218	218	352,10	291,5	299,25
60	445	379	379	566,11	483,0	481,24
70	701	596	600	910,40	713,3	773,91




Tools with TORQ-SET® drive

TORQUE values evaluated with testing gages of Phillips Screw Company, licensor of TORQ-SET®, on TORQUE testing equipment.


	TORQUE in Nm (min)	
	Bits	Screw-drivers
2	1,1	1,1
3	1,7	1,7
4	2,8	2,8
5	4,0	4,0
6	5,1	5,1
8	8,5	8,5
10	11,3	11,3
1/4"	28	17
5/16"	56	28
3/8"	102	62
7/16"	147	
1/2"	249	
9/16"	271	
5/8"	339	

Dimensions Of Profiles


TORX® Recess Screws

		A Ref. (mm)
TX 1		0,84
TX 2		0,94
TX 3		1,12
TX 4		1,30
TX 5		1,37
TX 6		1,65
TX 7		1,97
TX 8		2,30
TX 9		2,48
TX 10		2,72
TX 15		3,26
TX 20		3,84
TX 25		4,40
TX 27		4,96
TX 30		5,49
TX 40		6,60
TX 45		7,77
TX 50		8,79
TX 55		11,17
TX 60		13,20
TX 70		15,49


TORX PLUS® Recess Screws

		A Ref. (mm)
1 IP		0,84
2 IP		0,95
3 IP		1,13
4 IP		1,29
5 IP		1,41
6 IP		1,69
7 IP		1,97
8 IP		2,29
9 IP		2,48
10 IP		2,72
15 IP		3,25
20 IP		3,84
25 IP		4,39
27 IP		4,95
30 IP		5,49
40 IP		6,60
45 IP		7,77
50 IP		8,79
55 IP		11,16
60 IP		13,20
70 IP		15,48


TORQ-SET® Recess Screws

		A Ref. (mm)
0		0,43
1		0,43
2		0,43
3		0,48
4		0,56
5		0,63
6		0,71
8		0,84
10		0,96
1/4"		1,27
5/16"		1,60
3/8"		1,90
7/16"		2,23
1/2"		2,54


TRI-WING® Recess Screws

		A Ref. (mm)
0		0,45
1		0,57
2		0,75
3		0,95
4		1,08
5		1,23
6		1,54
7		1,87
8		2,17
9		2,48
10		2,78


XZN Recess Screws

		A Ref. (mm)
M 4		3,83
M 5		4,80
M 6		6,00
M 8		7,20
M 10		9,60
M 12		11,41
M 14		13,22
M 16		15,63
M 18		16,85
M 20		19,25

Square Recess Screws

		A Ref. (mm)
00		1,27
0		1,78
1		2,31
2		2,85
3		3,37
4		4,84
		5,1

Spanner Recess Screws

		A Ref. (mm)
4		1,52
6		2,41
8		2,79
10		3,30

Which Drive Is Suitable for which Driving Machine?

Wera Series 1



1/4"



Suitable for bit holders (standard specs):
DIN ISO 1173-D 6,3

Drive:
For use with bit holders or for direct machine drive.

Suitable for:
Bosch,
Fein,
Holz-Her,
Lecureux,
Metabo

Wera Series 2



5/16"



Suitable for bit holders (standard specs):
DIN ISO 1173-D 8

Drive:
For use with bit holders or for direct machine drive.

Suitable for:
Bosch,
Fein,
Holz-Her,
Lecureux,
Metabo

Wera Series 3



5,5 mm




Suitable for bit holders (standard specs):
DIN ISO 1173-B 5,5

Drive:
For direct machine drive.

Suitable for:
AEG,
Bosch,
Holz-Her,
Kress,
Metabo

Wera Series 7

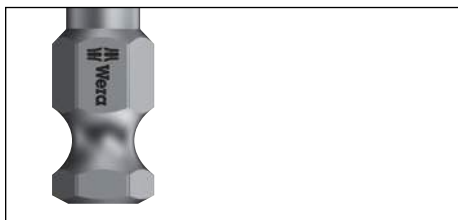

7/16"



Suitable for bit holders (standard specs):
DIN ISO 1173-F 11,2

Drive:
For direct machine drive.

Suitable for:
AEG,
ARO,
Atlas-Copco,
Black & Decker,
Bosch,
Buckeye-Tools,
Chicaco-Pneumatic,
Cincinnati Electric,

Clark,
Demag Pokorny (FMA),
Fein,
Holz-Her,
Ingersoll-Rand,
Keller,
Milwaukee Electric

Wera Series 8



7 mm



Suitable for bit holders (standard specs):
DIN ISO 1173-H 7

Drive:
For direct machine drive.

Suitable for:
Baier,
Fein

Wera Series 9



4 mm



Drive:
For direct machine drive.

Suitable for:
Delvo,
Densei,
etc.

Wera Series 11



M 4



Drive:
For direct machine drive.

Suitable for:
Böllhoff/
Uniquick,
Weber

Wera Series 12



M 5



Drive:
For direct machine drive.

Suitable for:
Böllhoff/
Uniquick,
Holz-Her,
Weber

Wera Series 4



1/4"



Suitable for bit holders (standard specs):
DIN ISO 1173-F 6,3

Drive:
For use with bit holders or for direct machine drive.

Suitable for:

AEG,
ARO,
Atlas-Copco,
Biax,
Black & Decker,
Bosch,
Buckeye-Tools,
Chicaco
Pneumatic,
Cleco,
Deprag,
Desoutter,
Gardner-Denver,
Hios
(Ferra-Tools),
Hitachi,
Ingersoll-Rand,

Iwema
(Fuji Air Tools),
Keller,
Makita,
Mall,
Metabo,
NPK-Air Tools,
Pneutec,
Rockwell
Rotor Tool,
Skil Tool,
Stanley,
Thor Power-Tool,
Tohnichi,
Uryu
(UPT-Weiler),
Van Dorn,
Virax,
Wolf

Wera Series 6



5/16"



Standard specs:
DIN ISO 1173-F 8

Drive:
For direct machine drive.

Suitable for:

Buckeye Tools,
Demag
Pokorny (FMA),
Desoutter,
Fiam,
Grasso,
Rupes,
Suhner

Wera Series 15



M 6



Drive:
For direct machine drive.

Suitable for:
Böllhoff/
Uniquick,
Holz-Her,
Weber

Wera Series 16



10/32" NF2A



Drive:
For direct machine drive.

Suitable for:
USM,
DVSG,
Duofast

Wera Series 19



5/8"



Drive:
For direct machine drive.

Wera Series 21



4 mm



Drive:
For direct machine drive.

Suitable for:
BL-5000,
CL-2000,
CL-3000,
CL-4000,
SS-3000,
SS-4000,
L-4500,
L-5000,

CD-4000,
CD-5000,
VZ-1510
(incl. PS-Types)

Wera Series 22




5 mm



Drive:
For direct machine drive.

Suitable for:
CL-6000,
CL-6500,
CL-7000,
SS-6500,
SS-7000,
L-6500,
CD-6000,
CD-7000,
VZ-1820 (100 V),
VZ-3012 (100 V)
(incl. PS-Types)

Wera Series 23



1/4"



Drive:
For direct machine drive.

Suitable for:
Delvo
Densei
etc.

Connector Tools



Slotted Screws

Finder Sleeve 803

Wera Bits 800/1 Z

Universal Bit holder 890/4/1



Hexagon Headed Screw


Nut Setters 869/4



TORX®-Recess Screws


Wera Bits 867/1 Z

Universal Bit holder 894/3/1

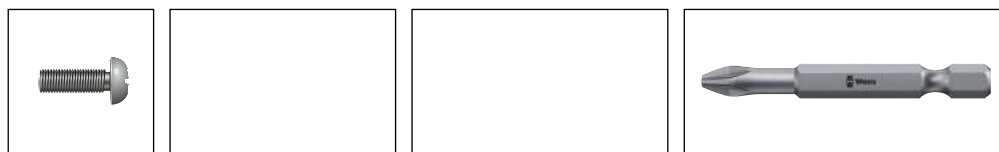

Pozidriv Screws

Wera Bits 855/4 TZ

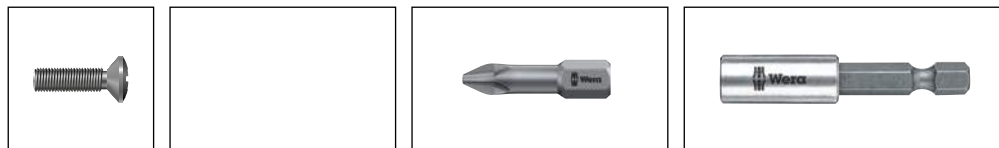



Phillips-Recess Screws

Wera Bits 851/1 TZ


Universal Bit holder 899/4/1

Examples for power drivers with direct-drive fittings:







Phillips Screws




Slotted Screws




Pozidriv Screws



Slotted Screws



Hexagon Socket Screws



Pozidriv Screws



Wera Bits 851/1 TZ



Wera Bits 855/1 TZ



Wera Bits 800/1 Z



Wera Bits 840/1 Z



Wera Bits 855/1 TZ



888/4/1 K Rapidaptor Universal Bit Holder



887/4 RR Rapidaptor Universal Bit Holder with ring magnet



897/4 R Rapidaptor BiTorsion Universal Bit Holder



897/4 IMP Impaktor holder with retaining ring and magnet



897/4 IMP R Impaktor holder with retaining ring and ring magnet



Wera Bits 800/4 Z



Universal Bit holder 899/4/1



Adaptor 780 A/1




Adaptor 784 B/1




Adaptor 780 A/2


Examples for electric drills:



Examples for power drivers with square drive:



Tool Selector

Slotted Screws												Wera Item			
Metric screws mm Ø			Self-tapping- screws mm Ø			Wood- screws mm Ø			Grub- screws mm Ø		Size a x b mm				
DIN EN ISO 1207	DIN EN ISO 1580	DIN EN ISO 2009	DIN EN ISO 2010	DIN EN ISO 1481	DIN EN ISO 1482	DIN EN ISO 1483	DIN 95	DIN 96	DIN 97	DIN EN 27435	DIN EN ISO 2342	Series 1	Series 2	Series 3	Series 4
															
1,2												0,3 x 1,8			
1,4															
		1,6						1,6	1,6	2,5	2,5	0,4 x 2,0			
										3,0	3,0				
1,6												0,4 x 2,5			
1,8			1,6				1,6	2,0		3,5	3,5				
2,0		2,0	2,0		2,2	2,2	2,0		2,0	4,0	4,0	0,5 x 3,0	•	•	•
								2,0				0,5 x 4,0	•	•	•
2,5		2,5	2,5	2,2			2,5	2,5	2,5			0,6 x 3,5	•	•	•
2,5				2,2				2,5				0,6 x 4,5	•	•	•
3,0	3,0	3,0	3,0		2,9	2,9	3,0	3,0	3,0	5,0	5,0	0,8 x 4,0	•	•	•
		3,5	3,5				3,5	3,5	3,5	6,0	6,0		•	•	•
3,0	3,0	3,5	3,5	2,9			3,5	3,5				0,8 x 5,5	•	•	•
				3,5	3,5	3,5	4,0	4,0	4,0			1,0 x 5,5	•	•	•
3,5	3,5	4,0	4,0	3,9	3,9	3,9	4,5	4,5	4,5				•	•	•
				4,2	4,2	4,2	5,0	5,0	5,0			1,2 x 6,5	•	•	•
4,0		5,0	5,0	4,8			5,5	5,5		8,0	8,0		•	•	•
5,0	4,0			4,2		4,8	5,5		5,5			1,2 x 8,0	•	•	•
	5,0	6,0	6,0	4,8	5,5	5,5	6,0	6,0	6,0	10,0	10,0		•	•	•
				6,3			6,0	6,0	6,0	12,0	12,0	1,6 x 8,0	•	•	•
6,0				5,5		6,3	7,0		7,0	14,0	14,0	1,6 x 10,0	•		
				6,3					8,0						
8,0	8,0	8,0	8,0				8,0	7,0		16,0	16,0	2,0 x 12,0	•		
10,0	10,0	10,0	10,0						10,0	18,0	18,0	2,5 x 14,0	•		
	10,0											2,5 x 16,0	•		

This is how you can navigate your way through the tables. or How to navigate your way through the tables.

The coloured sections in the upper table simply serve as an example.

The screw:

You are using a screw for a wooden application (DIN 95) size 2,5 mm Ø.

Your driving machine:

Your driving machine is a e.g. Bosch and has a fitting for a Wera series 4 bit.

The result:

The bit you are looking for is a Wera series 4 bit and has the article no. 800/4.

Phillips and Pozidriv Screws										Wera Item							
Metric screws mm Ø			Self-tapping- screws mm Ø			Wood- screws mm Ø		Special screws mm Ø	Size		Series 1	Series 2	Series 4	Series 11	Series 12	Series 15	Series 16
DIN EN ISO 7046	DIN EN ISO 7047	DIN EN ISO 7045	DIN EN ISO 7049	DIN EN ISO 7050	DIN 7995	DIN 7996	DIN 7997		PH +	PZ +	851/1 855/1	851/2 855/2	851/4 855/4	851/11 855/11	851/12 855/12	851/15 855/15	851/16 855/16
																	
* not included in standard specs.										00	00						
1,6 2	1,6 2	1,6 1,8	2,2	2,2		2			0	0	• • • •						
2,5 3	2,5 3	2 2,5 3	2,9	2,9	2,5 3	2,5 3	2,5 3	2,1 - 3,0	1	1	• • • • • •	• • • • • •	• • • • • •	• • • • • •			• • • • • •
3,5 4 5	3,5 4 5	3,5 4 5	3,5 4,2 4,8	3,5 4,2 4,8	3,5 4 4,5 5	3,5 4 4,5 5	3,5 4 4,5 5	3,1 - 5,2	2	2	• • • • • • • •	• • • • • • • •	• • • • • • • •	• • • • • • • •	• • • • • • • •	• • • • • • • •	• • • • • • • •
6	6	6	5,5 6,3	5,5 6,3	5,5 6 7	5,5 6 7	5,5 6 7	5,3 - 7,2	3	3	• • • • • •	• • • • • •	• • • • • •				
8 10	8 10	8 10	8 9,5	8 9,5	8	8	8	7,3 - 12,7	4	4	• • • •	• • • •					

Tool Selector

TORX® screws (thread size) and hexalobular as per DIN EN ISO 10664																				
Metric screws mm Ø (M)						Self-tapping screws mm Ø				 Size TORX®	Wera Item									
TORX® screws available on the market	DIN EN ISO 14583	DIN EN ISO 14579 14580	DIN EN ISO 14581	DIN EN ISO 14584	DIN EN ISO 14582	TORX® screws available on the market	DIN EN ISO 14585	DIN EN ISO 14586	DIN EN ISO 14587		Series 0	Series 1	Series 1	Series 1	Series 2	Series 4	Series 11	Series 12	Series 15	Series 16
	867/0	867/1	867/1 B0	867/1 W	867/2		867/4	867/11	867/12		867/15	867/16								
																				
1,6/1,8										TX 1										
2										TX 2										
2,2										TX 3										
										TX 4										
2,5										TX 5										
1,6/2/3	2	2	2	2		2,2				TX 6										
3,5										TX 7										
2,2/2,5/3/4	2,5	2,5	2,5	2,5		2,9				TX 8										
4,5										TX 9										
3/3,5/5	3	3	3	3		2,9/3,5	2,9	2,9	2,9	TX 10										
3,5/4	3,5	3,5	3,5	3,5		3,5/3,9/4,2	3,5	3,5	3,5	TX 15										
4/5/6	4	4	4	4		4,2/4,8	4,2	4,2	4,2	TX 20										
5/6/7	5	5	5	5	5	4,8/5,5/6,3	4,8/5,5	4,8/5,5	4,8/5,5	TX 25										
6/8										TX 27										
6/7	6	6	6	6	6	6,3	6,3	6,3	6,3	TX 30										
8/10						8				TX 40										
8/10/12	8	8	8	8	8					TX 45										
10/14	10	10	10	10	10	9,5				TX 50										
12/14/16/18		12								TX 55										
14/16/20		14								TX 60										

Hexagon Socket Screws					Size mm	Wera Item					
Metric screws mm Ø								Series 1	Series 2	Series 4	Series 7
DIN EN ISO 4762	DIN 7984	DIN EN ISO 10642	DIN EN ISO 4026 DIN EN ISO 4027 DIN EN ISO 4028 DIN EN ISO 4029	DIN 908		840/1	840/2	840/4	840/7	840/8	
											
			1,4/1,6/1,8		0,7						
			2,0		0,9						
1,4			2,5		1,3						
1,6/2,0			3,0		1,5						
2,5	3,0	3,0	4,0		2,0						
3,0	4,0	4,0	5,0		2,5						
4,0	5,0	5,0	6,0		3,0						
5,0	6,0	6,0	8,0		4,0						
6,0	8,0	8,0	10,0	10,0	5,0						
8,0		10,0	12,0/14,0	12,0/14,0	6,0						
10,0	12,0	12,0	16,0	16,0/18,0	8,0						
12,0	14,0	14,0/16,0	18,0/20,0	20,0/22,0	10,0						
14,0	16,0/18,0	18,0/20,0	22,0/24,0	24,0/26,0	12,0						

Hexagon Headed Screws				Wera Item			
Metric screws mm Ø		Self-tapping-screws mm Ø	Wood-screws mm Ø	Size SW	Nut setters		
DIN EN ISO 4014	DIN EN ISO 4017	DIN EN ISO 1479	DIN 571		869/4	869/4 M	3869/4
							
				2,5			
				3,0			
M 1,6	M 1,6	2,2		3,2			
				3,5			
M 2	M 2			4,0			
				4,5			
M 2,5	M 2,5	2,9		5,0	•		
M 3	M 3	3,5		5,5	•	•	
M 3,5	M 3,5			6,0	•	•	
M 4	M 4	3,9/4,2	4,0	7,0	•	•	•
M 5	M 5	4,8/5,5	5,0	8,0		•	•
				9,0		•	
M 6	M 6	6,3	6,0	10,0		•	•
M 7	M 7			11,0		•	
			7,0	12,0	•	•	
M 8	M 8	8,0	8,0	13,0	•	•	•
				14,0			
				3/16"			
				1/4"	•	•	
				9/32"			
				5/16"	•	•	
				11/32"			
				3/8"	•	•	•
				7/16"	•	•	
				1/2"			
				9/16"			
				5/8"			

TORQUE Conversion Table

Conversion								
Units	SI				Metric			
	Units				scale			
	cNm	dNm	Nm	cmkg	mkg	ft.lb	in.lb	in.oz
1 cNm =	1	0,1	0,01	0,1020	0,0010	0,0074	0,0885	1,4161
1 dNm =	10	1	0,1	1,0197	0,0102	0,0738	0,8851	14,1612
1 Nm =	100	10	1	10,1972	0,1020	0,7376	8,8508	141,6123
1 cmkg =	9,8067	0,9807	0,0981	1	0,0100	0,0723	0,8680	13,8874
1 mkg =	980,6650	98,0665	9,8067	100	1	7,2330	86,7964	1388,7422
1 ft.lb =	135,5818	13,5581	1,3558	13,8255	0,1383	1	12	192
1 in.lb =	11,2985	1,1298	0,1130	1,1521	0,0115	0,0833	1	16
1 in. oz =	0,7062	0,0706	0,0071	0,0720	0,0007	0,0052	0,0625	1

Example 1
1 Nm = 0,102 mkg
17,4 Nm = 17,4 x 0,102 mkg
17,4 Nm = 1,775 mkg

Example 2
1 mkg = 9,8067 Nm
12,5 mkg = 12,5 x 9,8067 Nm
12,5 mkg = 122,58 Nm

Conversion Nm in mkg										
1 Nm = 0,10197 mkg										
Nm	0	1	2	3	4	5	6	7	8	9
0	0,00	0,10	0,20	0,31	0,41	0,51	0,61	0,71	0,82	0,92
10	1,02	1,12	1,22	1,33	1,43	1,53	1,63	1,73	1,84	1,94
20	2,04	2,14	2,24	2,35	2,45	2,55	2,65	2,75	2,86	2,96
30	3,06	3,16	3,26	3,37	3,47	3,57	3,67	3,77	3,87	3,98
40	4,08	4,18	4,28	4,38	4,49	4,59	4,69	4,79	4,89	5,00
50	5,10	5,20	5,30	5,40	5,51	5,61	5,71	5,81	5,91	6,02
60	6,12	6,22	6,32	6,42	6,53	6,63	6,73	6,83	6,93	7,04
70	7,14	7,24	7,34	7,44	7,55	7,65	7,75	7,85	7,95	8,06
80	8,16	8,26	8,36	8,46	8,57	8,67	8,77	8,87	8,97	9,08
90	9,18	9,28	9,38	9,48	9,59	9,69	9,79	9,89	9,99	10,10
100	10,20	10,30	10,40	10,50	10,60	10,71	10,81	10,91	11,01	11,11

Conversion mkg in Nm										
1 mkg = 9,80665 Nm										
mkg	0	1	2	3	4	5	6	7	8	9
0	0,00	9,81	19,61	29,42	39,23	49,03	58,84	68,65	78,45	88,26
10	98,07	107,87	117,68	127,49	137,29	147,10	156,91	166,71	176,52	186,33
20	196,13	205,94	215,75	225,55	235,36	245,17	254,97	264,78	274,59	284,39
30	294,20	304,01	313,81	323,62	333,43	343,23	353,04	362,85	372,65	382,46
40	392,27	402,07	411,88	421,69	431,49	441,30	451,11	460,91	470,72	480,53
50	490,33	500,14	509,95	519,75	529,56	539,37	549,17	558,98	568,79	578,59
60	588,40	598,21	608,01	617,82	627,63	637,43	647,24	657,05	666,85	676,66
70	686,47	696,27	706,08	715,89	725,69	735,50	745,31	755,11	764,92	774,73
80	784,53	794,34	804,15	813,95	823,76	833,57	843,37	853,18	862,99	872,79
90	882,60	892,41	902,21	912,02	921,83	931,63	941,44	951,25	961,05	970,86
100	980,67	990,47	1000,28	1010,08	1019,89	1029,70	1039,50	1049,31	1059,12	1068,92

Conversion Nm in ft.lb										
1 Nm = 0,73756 ft.lb										
Nm	0	1	2	3	4	5	6	7	8	9
0	0,00	0,74	1,48	2,21	2,95	3,69	4,43	5,16	5,90	6,64
10	7,38	8,11	8,85	9,59	10,33	11,06	11,80	12,54	13,28	14,01
20	14,75	15,49	16,23	16,96	17,70	18,44	19,18	19,91	20,65	21,39
30	22,13	22,86	23,60	24,34	25,08	25,81	26,55	27,29	28,03	28,76
40	29,50	30,24	30,98	31,72	32,45	33,19	33,93	34,67	35,40	36,14
50	36,88	37,62	38,35	39,09	39,83	40,57	41,30	42,04	42,78	43,52
60	44,25	44,99	45,73	46,47	47,20	47,94	48,68	49,42	50,15	50,89
70	51,63	52,37	53,10	53,84	54,58	55,32	56,05	56,79	57,53	58,27
80	59,00	59,74	60,48	61,22	61,96	62,69	63,43	64,17	64,91	65,64
90	66,38	67,12	67,86	68,59	69,33	70,07	70,81	71,54	72,28	73,02
100	73,76	74,49	75,23	75,97	76,71	77,44	78,18	78,92	79,66	80,39

Conversion ft.lb in Nm										
1 ft.lb = 1,35581 Nm										
ft.lb	0	1	2	3	4	5	6	7	8	9
0	0,00	1,36	2,71	4,07	5,42	6,78	8,13	9,49	10,85	12,20
10	13,56	14,91	16,27	17,63	18,98	20,34	21,69	23,05	24,40	25,76
20	27,12	28,47	29,83	31,18	32,54	33,90	35,25	36,61	37,96	39,32
30	40,67	42,03	43,39	44,74	46,10	47,45	48,81	50,16	51,52	52,88
40	54,23	55,59	56,94	58,30	59,66	61,01	62,37	63,72	65,08	66,43
50	67,79	69,15	70,50	71,86	73,21	74,57	75,93	77,28	78,64	79,99
60	81,35	82,70	84,06	85,42	86,77	88,13	89,48	90,84	92,20	93,55
70	94,91	96,26	97,62	98,97	100,33	101,69	103,04	104,40	105,75	107,11
80	108,46	109,82	111,18	112,53	113,89	115,24	116,60	117,96	119,31	120,67
90	122,02	123,38	124,73	126,09	127,45	128,80	130,16	131,51	132,87	134,23
100	135,58	136,94	138,29	139,65	141,00	142,36	143,72	145,07	146,43	147,78

Conversion Nm in in.lb										
1 Nm = 8,85077 in.lb										
Nm	0	1	2	3	4	5	6	7	8	9
0	0,00	8,85	17,70	26,55	35,40	44,25	53,10	61,96	70,81	79,66
10	88,51	97,36	106,21	115,06	123,91	132,76	141,61	150,46	159,31	168,16
20	177,02	185,87	194,72	203,57	212,42	221,27	230,12	238,97	247,82	256,67
30	265,52	274,37	283,22	292,08	300,93	309,78	318,63	327,48	336,33	345,18
40	354,03	362,88	371,73	380,58	389,43	398,28	407,14	415,99	424,84	433,69
50	442,54	451,39	460,24	469,09	477,94	486,79	495,64	504,49	513,34	522,20
60	531,05	539,90	548,75	557,60	566,45	575,30	584,15	593,00	601,85	610,70
70	619,55	628,40	637,26	646,11	654,96	663,81	672,66	681,51	690,36	699,21
80	708,06	716,91	725,76	734,61	743,46	752,32	761,17	770,02	778,87	787,72
90	796,57	805,42	814,27	823,12	831,97	840,82	849,67	858,52	867,38	876,23
100	885,08	893,93	902,78	911,63	920,48	929,33	938,18	947,03	955,88	964,73

Conversion in.lb in Nm										
1 in.lb = 0,11298 Nm										
in.lb	0	1	2	3	4	5	6	7	8	9
0	0,00	0,11	0,23	0,34	0,45	0,56	0,68	0,79	0,90	1,02
10	1,13	1,24	1,36	1,47	1,58	1,69	1,81	1,92	2,03	2,15
20	2,26	2,37	2,49	2,60	2,71	2,82	2,94	3,05	3,16	3,28
30	3,39	3,50	3,62	3,73	3,84	3,95	4,07	4,18	4,29	4,41
40	4,52	4,63	4,75	4,86	4,97	5,08	5,20	5,31	5,42	5,54
50	5,65	5,76	5,87	5,99	6,10	6,21	6,33	6,44	6,55	6,67
60	6,78	6,89	7,00	7,12	7,23	7,34	7,46	7,57	7,68	7,80
70	7,91	8,02	8,13	8,25	8,36	8,47	8,59	8,70	8,81	8,93
80	9,04	9,15	9,26	9,38	9,49	9,60	9,72	9,83	9,94	10,06
90	10,17	10,28	10,39	10,51	10,62	10,73	10,85	10,96	11,07	11,19
100	11,30	11,41	11,52	11,64	11,75	11,86	11,98	12,09	12,20	12,31

Conversion Of Inches To Millimeters

Inches		0	1	2	3	4	5	6	7	8	9
			25.400	50.800	76.200	101.600	127.000	152.400	177.800	203.200	228.600
1/64	0.015625	0.397	25.797	51.197	76.597	101.997	127.397	152.797	178.197	203.597	228.997
1/32	0.03125	0.794	26.194	51.594	76.994	102.394	127.794	153.194	178.594	203.994	229.394
3/64	0.046875	1.191	26.591	51.991	77.391	102.791	128.191	153.591	178.991	204.391	229.791
1/16	0.0625	1.588	26.988	52.388	77.788	103.188	128.588	153.988	179.388	204.788	230.188
5/64	0.078125	1.984	27.384	52.784	78.184	103.584	128.984	154.384	179.784	205.184	230.584
3/32	0.09375	2.381	27.781	53.181	78.581	103.981	129.381	154.781	180.181	205.581	230.981
7/64	0.109375	2.778	28.178	53.578	78.978	104.378	129.778	155.178	180.578	205.978	231.378
1/8	0.125	3.175	28.575	53.975	79.375	104.775	130.175	155.575	180.975	206.375	231.775
9/64	0.140625	3.572	28.972	54.372	79.772	105.172	130.572	155.972	181.372	206.772	232.172
5/32	0.15625	3.969	29.369	54.769	80.169	105.569	130.969	156.369	181.769	207.169	232.569
11/64	0.171875	4.366	29.766	55.166	80.566	105.966	131.366	156.766	182.166	207.566	232.966
3/16	0.1875	4.762	30.162	55.562	80.962	106.362	131.762	157.162	182.562	207.962	233.362
13/64	0.203125	5.159	30.559	55.959	81.359	106.759	132.159	157.559	182.959	208.359	233.759
7/32	0.21875	5.556	30.956	56.356	81.756	107.156	132.556	157.956	183.356	208.756	234.156
15/64	0.234375	5.953	31.353	56.753	82.153	107.553	132.953	158.353	183.753	209.153	234.553
1/4	0.25	6.350	31.750	57.150	82.550	107.950	133.350	158.750	184.150	209.550	234.950
17/64	0.265625	6.747	32.147	57.547	82.947	108.347	133.747	159.147	184.547	209.947	235.347
9/32	0.28125	7.144	32.544	57.944	83.344	108.744	134.144	159.544	184.944	210.344	235.744
19/64	0.296875	7.541	32.941	58.341	83.741	109.141	134.541	159.941	185.341	210.741	236.141
5/16	0.3125	7.938	33.338	58.738	84.138	109.538	134.938	160.338	185.738	211.138	236.538
21/64	0.328125	8.334	33.734	59.134	84.534	109.934	135.334	160.734	186.134	211.534	236.934
11/32	0.34375	8.731	34.131	59.531	84.931	110.331	135.731	161.131	186.531	211.931	237.331
23/64	0.359375	9.128	34.528	59.928	85.328	110.728	136.128	161.528	186.928	212.328	237.728
3/8	0.375	9.525	34.925	60.325	85.725	111.125	136.525	161.925	187.325	212.725	238.125
25/64	0.390625	9.922	35.322	60.722	86.122	111.522	136.922	162.322	187.722	213.122	238.522
13/32	0.40625	10.319	35.719	61.119	86.519	111.919	137.319	162.719	188.119	213.519	238.919
27/64	0.421875	10.716	36.116	61.516	86.916	112.316	137.716	163.116	188.516	213.916	239.316
7/16	0.4375	11.112	36.512	61.912	87.312	112.712	138.112	163.512	188.912	214.312	239.712
29/64	0.453125	11.509	36.909	62.309	87.709	113.109	138.509	163.909	189.309	214.709	240.109
15/32	0.46875	11.906	37.306	62.706	88.106	113.506	138.906	164.306	189.706	215.106	240.506
31/64	0.484375	12.303	37.703	63.103	88.503	113.903	139.303	164.703	190.103	215.503	240.903
1/2	0.5	12.700	38.100	63.500	88.900	114.300	139.700	165.100	190.500	215.900	241.300
33/64	0.515625	13.097	38.497	63.897	89.297	114.697	140.097	165.497	190.897	216.297	241.697
17/32	0.53125	13.494	38.894	64.294	89.694	115.094	140.494	165.894	191.294	216.694	242.094
35/64	0.546875	13.891	39.291	64.691	90.091	115.491	140.891	166.291	191.691	217.091	242.491
9/16	0.5625	14.288	39.688	65.088	90.488	115.888	141.288	166.688	192.088	217.488	242.888
37/64	0.578125	14.684	40.084	65.484	90.884	116.284	141.684	167.084	192.484	217.884	243.284
19/32	0.59375	15.081	40.481	65.881	91.281	116.681	142.081	167.481	192.881	218.281	243.681
39/64	0.609375	15.478	40.878	66.278	91.678	117.078	142.478	167.878	193.278	218.678	244.078
5/8	0.625	15.875	41.275	66.675	92.075	117.475	142.875	168.275	193.675	219.075	244.475
41/64	0.640625	16.272	41.672	67.072	92.472	117.872	143.272	168.672	194.072	219.472	244.872
21/32	0.65625	16.669	42.069	67.469	92.869	118.269	143.669	169.069	194.469	219.869	245.269
43/64	0.671875	17.066	42.466	67.866	93.266	118.666	144.066	169.466	194.866	220.266	245.666
11/16	0.6875	17.462	42.862	68.262	93.662	119.062	144.462	169.862	195.262	220.662	246.062
45/64	0.703125	17.859	43.259	68.659	94.059	119.459	144.859	170.259	195.659	221.059	246.459
23/32	0.71875	18.256	43.656	69.056	94.456	119.856	145.256	170.656	196.056	221.456	246.856
47/64	0.734375	18.653	44.053	69.453	94.853	120.253	145.653	171.053	196.453	221.853	247.253
3/4	0.75	19.050	44.450	69.850	95.250	120.650	146.050	171.450	196.850	222.250	247.650
49/64	0.765625	19.447	44.847	70.247	95.647	121.047	146.447	171.847	197.247	222.647	248.047
25/32	0.78125	19.844	45.244	70.644	96.044	121.444	146.844	172.244	197.644	223.044	248.444
51/64	0.796875	20.241	45.641	71.041	96.441	121.841	147.241	172.641	198.041	223.441	248.841
13/16	0.8125	20.638	46.038	71.438	96.838	122.238	147.638	173.038	198.438	223.838	249.238
53/64	0.828125	21.034	46.434	71.834	97.234	122.634	148.034	173.434	198.834	224.234	249.634
27/32	0.84375	21.431	46.831	72.231	97.631	123.031	148.431	173.831	199.231	224.631	250.031
55/64	0.859375	21.828	47.228	72.628	98.028	123.428	148.828	174.228	199.628	225.028	250.428
7/8	0.875	22.225	47.625	73.025	98.425	123.825	149.225	174.625	200.025	225.425	250.825
57/64	0.890625	22.622	48.022	73.422	98.822	124.222	149.622	175.022	200.422	225.822	251.222
29/32	0.90625	23.019	48.419	73.819	99.219	124.619	150.019	175.419	200.819	226.219	251.619
59/64	0.921875	23.416	48.816	74.216	99.616	125.016	150.416	175.816	201.216	226.616	252.016
15/16	0.9375	23.812	49.212	74.612	100.012	125.412	150.812	176.212	201.612	227.012	252.412
61/64	0.953125	24.209	49.609	75.009	100.409	125.809	151.209	176.609	202.009	227.409	252.809
31/32	0.96875	24.606	50.006	75.406	100.806	126.206	151.606	177.006	202.406	227.806	253.206
63/64	0.984375	25.003	50.403	75.803	101.203	126.603	152.003	177.403	202.803	228.203	253.603

Values in mm



Standard TORQUE Values

Coefficient of friction μ total = 0,1 (Property-class ISO 898/1)													
A/F mm	Size d	3,6 (4D) F_V (N)	3,6 (4D) M_A (NM)	5,6 (5D) F_V (N)	5,6 (5D) M_A (NM)	6,9 (6 G) F_V (N)	6,9 (6 G) M_A (NM)	8,8 (8 G) F_V (N)	8,8 (8 G) M_A (NM)	10,9 (10 K) F_V (N)	10,9 (10 K) M_A (NM)	12,9 (12 K) F_V (N)	12,9 (12 K) M_A (NM)
													
3,2	M 1,6					475	0,125	587	0,150	862	0,215	1,009	0,255
4,0	M 2,0					790	0,26	975	0,315	1.432	0,465	1,676	0,545
5,0	M 2,5					1.320	0,52	1.624	0,645	2.385	0,935	2,791	1,095
5,5	M 3	690	0,30	1.130	0,51	1,850	0,81	2.450	1,1	3.450	1,5	4.100	1,8
6	M 3,5	920	0,47	1.550	0,78	2.450	1,2	3.250	1,7	4.600	2,3	5.500	2,8
7	M 4	1,200	0,70	2.000	1,2	3.150	1,9	4.200	2,4	5.900	3,3	7.100	4,0
8/9	M 5	1.950	1,4	3.250	2,3	5.200	3,6	6.900	4,9	9.700	7,0	11.600	8,0
10	M 6	2.750	2,4	4.550	3,9	7.300	6,3	9.750	8,0	13.700	12	16.400	14
13/14	M 8	5.050	5,7	8.400	9,5	13.400	15	17.900	20	25.100	28	30.200	34
15/17	M 10	8.000	11	13.300	19	21.400	30	28.400	40	40.000	56	48.000	67
19/21	M 12	11.700	20	19.500	33	31.100	52	41.500	69	58.500	98	70.000	115
22/23	M 14	16.000	31	26.700	52	42.700	83	56.500	110	80.000	155	96.000	185
24/26	M 16	22.000	48	36.700	79	58.500	125	78.500	170	110.000	240	132.000	285
27	M 18	26.000	66	44.600	110	71.500	175	95.000	235	134.000	330	160.000	395
30	M 20	34.400	92	57.500	155	91.500	245	122.000	330	172.000	465	206.000	560
32	M 22	43.000	125	71.500	205	115.000	330	152.000	445	214.000	620	257.000	750
36	M 24	49.500	160	82.500	265	132.000	425	176.000	570	248.000	800	298.000	960
41	M 27	65.000	235	109.000	390	174.000	630	232.000	840	326.000	1.200	391.000	1.400
46	M 30	79.000	320	132.000	530	211.000	850	282.000	1.150	397.000	1.600	476.000	1.950
50	M 33	98.500	430	164.000	720	263.000	1.150	351.000	1.550	493.000	2.150	592.000	2.600
55	M 36	116.000	550	193.000	920	309.000	1.500	412.000	1.950	579.000	2.750	695.000	3.300

F_V = Preload
 M_A = tightening TORQUE


Conversion N (Newton)
1 kp = 9,80665 N $\approx$ 9,81 N


Coefficient of friction μ total = 0,14 (Property-class ISO 898/1)													
A/F mm	Size d	3,6 (4D) F_V (N)	3,6 (4D) M_A (NM)	5,6 (5D) F_V (N)	5,6 (5D) M_A (NM)	6,9 (6 G) F_V (N)	6,9 (6 G) M_A (NM)	8,8 (8 G) F_V (N)	8,8 (8 G) M_A (NM)	10,9 (10 K) F_V (N)	10,9 (10 K) M_A (NM)	12,9 (12 K) F_V (N)	12,9 (12 K) M_A (NM)
													
3,2	M 1,6					440	0,15	538	0,18	790	0,27	925	0,31
4,0	M 2,0					730	0,31	895	0,38	1.315	0,56	1.539	0,65
5,0	M 2,5					1.220	0,64	1.494	0,78	2.194	1,14	2.567	1,34
5,5	M 3	630	0,37	1.050	0,62	1.700	0,99	2.250	1,3	3.150	1,9	3.800	2,2
6	M 3,5	850	0,57	1.400	0,95	2.250	1,5	3.000	2,0	4.250	2,9	5.100	3,4
7	M 4	1.100	0,85	1.850	1,4	2.900	2,3	3.900	2,9	5.450	4,1	6.550	4,9
8/9	M 5	1.800	1,7	3.000	2,8	4.800	4,5	6.350	6,0	8.950	8,5	10.700	10
10	M 6	2.550	2,9	4.200	4,8	6.750	7,7	9.000	10	12.600	14	15.100	17
13/14	M 8	4.650	7,0	7.750	12	12.400	19	16.500	25	23.200	35	27.900	41
15/17	M 10	7.400	14	12.300	23	19.700	37	26.200	49	36.900	69	44.300	83
19/21	M 12	10.800	24	18.000	40	28.800	65	38.300	86	54.000	120	64.500	145
22/23	M 14	14.800	39	24.000	64	39.500	105	52.500	135	74.000	190	88.500	230
24/26	M 16	20.400	59	34.000	98	54.500	155	73.000	210	102.000	295	123.000	355
27	M 18	24.800	81	41.000	135	66.000	215	88.000	290	124.000	405	148.000	485
30	M 20	31.900	115	53.000	190	85.000	305	114.000	410	160.000	580	192.000	690
32	M 22	39.900	155	66.500	260	106.000	415	141.000	550	199.000	780	239.000	930
36	M 24	45.900	200	76.500	330	122.000	530	164.000	710	230.000	1.000	276.000	1.200
41	M 27	60.500	295	100.000	490	161.000	780	215.000	1.050	302.000	1.500	363.000	1.800
46	M 30	73.500	395	122.000	660	196.000	1.050	262.000	1.450	368.000	2.000	442.000	2.400
50	M 33	91.500	540	153.000	900	244.000	1.450	326.000	1.900	458.000	2.700	550.000	3.250
55	M 36	107.000	690	179.000	1.150	287.000	1.850	382.000	2.450	537.000	3.450	645.000	4.150

F_V = Preload
 M_A = tightening TORQUE

Conversion N (Newton)
1 kp = 9,80665 N $\approx$ 9,81 N

Three Part Driver System

Slotted Screws (thread size)											Part 1	Part 2	Part 3
Metric screws				Self-tapping screws			Wood-screws			Screw-head dia.	Wera Finder sleeve Art. 803	Wera Bits	Wera Universal Bitholder
mm Ø				mm Ø			mm Ø				bore Zt x N	size a x b	
DIN EN ISO 1207	DIN EN ISO 1580	DIN EN ISO 2009	DIN EN ISO 2010	DIN EN ISO 1481	DIN EN ISO 1482	DIN EN ISO 1483	DIN 95	DIN 96	DIN 97	max. mm			890/4/1
													
2,0		2,0	2,0				2,0		2,0	3,8	4,0 x 3,0	0,5 x 3,0	•
2,5		2,5	2,5	2,2			2,5		2,5	4,7	5,0 x 3,5	0,6 x 3,5	•
2,5				2,2				2,5		5,0	5,5 x 4,5	0,6 x 4,5	•
								2,0		4,0		0,5 x 4,0	
3,0	3,0	3,0	3,0				3,0	3,0	3,0	6,0	6,5 x 4,0		•
		3,5	3,5	2,9	2,9	2,9	3,5	3,0	3,5	6,5		0,8 x 4,0	•
3,0	3,0	3,5	3,5	2,9			3,5	3,5		7,0		0,8 x 5,5	•
				3,5	3,5	3,5	4,0	4,0	4,0	8,0	8,5 x 5,5		•
3,5	3,5	4,0	4,0	3,9	3,9	3,9	4,5		4,5	8,3		1,0 x 5,5	•
					4,2	4,2	5,0	5,0	5,0	10,4			•
4,0		5,0	5,0		4,8					9,5	10,5 x 6,5	1,2 x 6,5	•
5,0	4,0			4,2		4,8	5,5		5,5	10,2	11,0 x 8,0	1,2 x 8,0	•
	5,0	6,0	6,0	4,8	5,5	5,5				11,0		1,6 x 8,0	•
							6,0		6,0	11,0			•

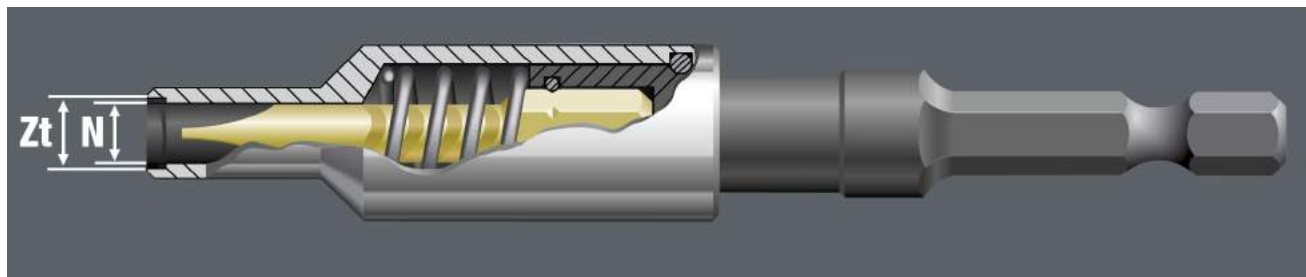

Code No. Index

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05000005001	452	05002933001	252	05003447001	100	05003556001	154
05000010001	452	05002936001	252	05003448001	100	05003557001	154
05000015001	452	05002938001	252	05003450001	99	05003558001	154
05000020001	452	05002940001	252	05003451001	99	05003559001	154
05000025001	452	05002943001	252	05003452001	99	05003560001	154
05000030001	452	05002946001	252	05003455001	99	05003561001	154
05000035001	452	05002948001	252	05003456001	99	05003562001	154
05000105001	453	05002950001	252	05003460001	102	05003563001	154
05000110001	453	05002960001	252	05003461001	102	05003564001	154
05000115001	453	05002966001	252	05003462001	102	05003565001	154
05000120001	453	05002968001	252	05003463001	102	05003566001	154
05000125001	453	05002970001	252	05003470001	97	05003567001	154
05000130001	453	05002973001	252	05003471001	94	05003568001	154
05000135001	453	05002976001	252	05003472001	97	05003569001	154
05000205001	452	05002980001	252	05003473001	97	05003570001	154
05000210001	452	05002990001	250	05003474001	96	05003571001	154
05000215001	452	05003210001	250	05003484001	97	05003572001	154
05000220001	452	05003265001	250	05003500001	134	05003573001	154
05000225001	452	05003400001	98	05003501001	140	05003574001	154
05000230001	452	05003401001	98	05003502001	140	05003575001	154
05000235001	452	05003402001	98	05003503001	140	05003576001	154
05000305001	452	05003403001	98	05003504001	140	05003577001	154
05000310001	452	05003404001	98	05003505001	140	05003578001	154
05000315001	452	05003405001	98	05003506001	140	05003579001	154
05000320001	452	05003406001	98	05003507001	140	05003580001	154
05000325001	452	05003407001	98	05003508001	140	05003581001	156
05000330001	452	05003408001	98	05003509001	140	05003582001	155
05000335001	452	05003410001	98	05003510001	140	05003583001	155
05000405001	453	05003411001	98	05003511001	140	05003584001	156
05000410001	453	05003412001	98	05003512001	140	05003585001	156
05000415001	453	05003413001	99	05003513001	140	05003590001	156
05000420001	453	05003414001	99	05003514001	140	05003591001	154
05000425001	453	05003415001	101	05003515001	140	05003592001	154
05000430001	453	05003416001	101	05003516001	140	05003594001	147
05000435001	453	05003417001	101	05003517001	140	05003596001	148
05000505001	452	05003418001	101	05003518001	140	05003600001	162
05000510001	452	05003420001	101	05003519001	140	05003601001	170
05000515001	452	05003421001	101	05003520001	140	05003602001	170
05000520001	452	05003422001	101	05003521001	140	05003603001	170
05000525001	452	05003423001	101	05003522001	140	05003604001	170
05000530001	452	05003424001	101	05003523001	140	05003605001	170
05000535001	452	05003430001	100	05003524001	141	05003606001	170
05000605001	453	05003431001	100	05003525001	141	05003607001	170
05000610001	453	05003432001	100	05003526001	141	05003608001	170
05000615001	453	05003433001	100	05003527001	143	05003609001	170
05000620001	453	05003434001	100	05003528001	143	05003610001	170
05000625001	453	05003435001	100	05003529001	143	05003611001	170
05000630001	453	05003436001	100	05003530001	140	05003612001	170
05000635001	453	05003437001	101	05003531001	140	05003613001	170
05002900001	250	05003438001	101	05003533001	132	05003614001	170
05002901001	247	05003439001	101	05003535001	132	05003615001	170
05002910001	251	05003440001	100	05003550001	148	05003616001	170
05002913001	251	05003441001	100	05003551001	154	05003617001	170
05002920001	251	05003442001	100	05003552001	154	05003618001	170
05002923001	251	05003443001	100	05003553001	154	05003619001	170
05002926001	251	05003445001	100	05003554001	154	05003620001	170
05002930001	252	05003446001	100	05003555001	154	05003621001	170

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05003622001	170	05003824001	172	05004201001	173	05006176001	85
05003623001	170	05003825001	172	05004202001	172	05006177001	85
05003624001	170	05003826001	172	05004203001	171	05006178001	85
05003625001	170	05003827001	172	05004650001	85	05006179001	85
05003626001	170	05003828001	172	05004655001	85	05006181001	85
05003627001	170	05003829001	172	05004660001	85	05006182001	85
05003628001	170	05003830001	172	05004665001	85	05006183001	85
05003629001	170	05003831001	172	05004670001	85	05006184001	85
05003630001	170	05003832001	172	05004675001	85	05006186001	85
05003631001	170	05003833001	172	05004780001	86	05006190001	84
05003632001	170	05003834001	172	05004781001	86	05006191001	84
05003633001	170	05003835001	172	05004782001	86	05006380001	83
05003634001	170	05003836001	172	05004783001	86	05006381001	83
05003635001	170	05003837001	172	05004784001	86	05006440001	80
05003636001	174	05003838001	172	05005300001	86	05006441001	80
05003637001	174	05003840001	172	05005305001	86	05006442001	80
05003638001	174	05003841001	172	05005310001	86	05006450001	82
05003639001	175	05003842001	172	05005315001	86	05006451001	82
05003640001	175	05003843001	172	05005320001	86	05006455001	84
05003641001	175	05003844001	172	05005325001	86	05006456001	84
05003642001	173	05003845001	172	05005330001	86	05006460001	83
05003643001	174	05003850001	172	05005335001	86	05006461001	83
05003645001	161	05003851001	172	05005340001	86	05006465001	84
05003647001	162	05003852001	172	05005655001	87	05006466001	84
05003660001	187	05003853001	172	05006100001	80	05006480001	90
05003665001	187	05003854001	172	05006105001	80	05007355001	33
05003666001	187	05003855001	172	05006110001	80	05007610001	32
05003667001	187	05003856001	172	05006115001	80	05007620001	32
05003668001	187	05003857001	172	05006116001	80	05007621001	32
05003669001	187	05003858001	172	05006120001	80	05007635001	32
05003670001	187	05003990001	98	05006121001	80	05007640001	32
05003675001	187	05004003001	137	05006125001	80	05007670001	32
05003684001	187	05004004001	139	05006126001	80	05007671001	32
05003685001	187	05004016001	130	05006130001	80	05007672001	32
05003690001	187	05004017001	136	05006135001	80	05007673001	32
05003692001	178	05004018001	138	05006140001	80	05007674001	32
05003695001	178	05004019001	130	05006145001	88	05007675001	32
05003696001	179	05004020001	136	05006147001	89	05007676001	32
05003697001	179	05004021001	138	05006148001	89	05007677001	32
05003730001	170	05004033001	151	05006150001	81	05007680001	44
05003731001	170	05004034001	153	05006152001	81	05007681001	44
05003732001	170	05004046001	146	05006153001	81	05008006001	32
05003733001	170	05004047001	150	05006154001	81	05008007001	32
05003734001	170	05004048001	152	05006156001	81	05008008001	32
05003735001	170	05004049001	146	05006158001	81	05008009001	32
05003736001	170	05004050001	150	05006159001	81	05008015001	32
05003737001	170	05004051001	152	05006160001	82	05008027001	32
05003738001	170	05004063001	167	05006162001	82	05008055001	32
05003739001	170	05004064001	169	05006163001	82	05008060001	32
05003760001	192	05004076001	160	05006164001	82	05008061001	32
05003765001	192	05004077001	166	05006165001	82	05008705001	34
05003780001	165	05004078001	168	05006166001	82	05008706001	34
05003781001	165	05004079001	160	05006168001	82	05008710001	34
05003820001	172	05004080001	166	05006169001	85	05008712001	34
05003821001	172	05004081001	168	05006170001	85	05008715001	34
05003822001	172	05004090001	164	05006172001	85	05008720001	34
05003823001	172	05004095001	164	05006174001	85	05008723001	34



Code No. Index

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05008725001	34	05013362001	70	05018350001	56	05021406001	208
05008730001	34	05013364001	70	05018352001	56	05021600001	210
05008735001	34	05013366001	70	05018354001	56	05021605001	210
05008740001	34	05013368001	70	05018355001	56	05021610001	210
05008750001	34	05013370001	70	05020012001	193	05021615001	210
05008751001	34	05013372001	70	05020013001	192	05021620001	210
05008752001	34	05013374001	70	05020022001	193	05021625001	210
05008753001	34	05013376001	70	05020064001	194	05021630001	210
05008775001	42	05013390001	71	05020065001	194	05021632001	210
05008780001	42	05013399001	71	05020066001	194	05021635001	210
05008782001	42	05013400001	71	05020067001	194	05021640001	210
05009305001	35	05013401001	71	05020068001	194	05021645001	210
05009310001	35	05013402001	71	05020069001	194	05021728001	206
05009312001	35	05013403001	71	05020070001	194	05021737001	207
05009313001	35	05013404001	71	05020071001	194	05021909001	207
05009315001	35	05013405001	71	05020072001	194	05022040001	210
05009317001	35	05013407001	71	05020073001	194	05022041001	210
05009319001	35	05013409001	71	05020074001	194	05022042001	210
05009320001	35	05013411001	71	05020075001	194	05022043001	210
05009325001	35	05017005001	26	05020076001	194	05022044001	210
05009330001	42	05017010001	26	05020077001	194	05022045001	210
05009335001	42	05017015001	26	05020078001	194	05022046001	210
05009337001	42	05017020001	26	05020079001	194	05022047001	210
05009340001	35	05017040001	26	05020080001	194	05022048001	210
05009341001	35	05017041001	26	05020081001	194	05022050001	209
05009342001	35	05017050001	27	05020082001	194	05022052001	209
05009343001	35	05017052001	27	05020090001	195	05022054001	209
05013300001	70	05017054001	27	05020091001	196	05022056001	209
05013301001	70	05017056001	27	05020092001	195	05022058001	209
05013302001	70	05017205001	216	05020093001	196	05022060001	209
05013303001	70	05017305001	216	05020129001	80	05022062001	209
05013304001	70	05017405001	216	05020131001	82	05022063001	209
05013305001	70	05017410001	216	05020132001	84	05022064001	209
05013306001	70	05017415001	216	05020133001	82	05022066001	209
05013307001	70	05018005001	56	05020134001	84	05022067001	209
05013308001	70	05018010001	56	05021005001	211	05022068001	210
05013309001	70	05018015001	56	05021010001	211	05022070001	210
05013310001	70	05018020001	56	05021015001	211	05022071001	210
05013311001	70	05018025001	56	05021020001	211	05022072001	210
05013312001	70	05018030001	56	05021025001	211	05022073001	210
05013314001	70	05018035001	56	05021030001	211	05022074001	210
05013330001	70	05018040001	56	05021035001	211	05022076001	210
05013331001	70	05018251001	56	05021040001	211	05022078001	210
05013332001	70	05018260001	26	05021045001	211	05022079001	210
05013333001	70	05018262001	26	05021050001	211	05022080001	210
05013334001	70	05018264001	26	05021055001	211	05022081001	210
05013335001	70	05018266001	26	05021060001	211	05022082001	210
05013337001	70	05018268001	26	05021065001	211	05022086001	204
05013338001	70	05018270001	26	05021070001	211	05022087001	204
05013339001	70	05018272001	26	05021075001	211	05022089001	202
05013341001	70	05018274001	26	05021080001	211	05022095001	210
05013350001	70	05018282001	28	05021085001	211	05022096001	210
05013352001	70	05018283001	28	05021090001	211	05022101001	206
05013354001	70	05018287001	29	05021095001	211	05022171001	205
05013356001	70	05018300001	26	05021100001	211	05022181001	206
05013358001	70	05018301001	26	05021105001	211	05022534001	203
05013360001	70	05018302001	26	05021110001	211	05022600001	209

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05022602001	209	05022905001	36	05024358001	214	05027934001	436
05022604001	209	05022910001	36	05024400001	27	05027935001	436
05022606001	209	05022915001	36	05024401001	27	05027936001	437
05022608001	209	05022920001	36	05024402001	27	05027950001	38
05022610001	209	05022925001	36	05024403001	27	05027952001	38
05022612001	209	05022930001	36	05024404001	27	05027954001	38
05022614001	209	05022935001	36	05024405001	27	05027956001	38
05022616001	209	05023105001	36	05024410001	29	05027958001	38
05022630001	209	05023107001	36	05026350001	57	05028000001	37
05022631001	209	05023110001	36	05026351001	57	05028001001	37
05022632001	209	05023115001	36	05026352001	57	05028002001	37
05022633001	209	05023120001	36	05026353001	57	05028003001	37
05022634001	209	05023125001	36	05026354001	57	05028004001	37
05022635001	209	05023130001	36	05026360001	57	05028005001	37
05022636001	209	05023305001	56	05026361001	57	05028008001	37
05022637001	209	05023307001	56	05026363001	57	05028010001	37
05022638001	209	05023309001	56	05026372001	57	05028012001	37
05022639001	203	05024001001	215	05026373001	57	05028013001	37
05022700001	208	05024002001	215	05026374001	57	05028015001	37
05022701001	208	05024003001	215	05026382001	57	05028020001	37
05022702001	208	05024004001	215	05027101001	209	05028025001	37
05022703001	208	05024005001	215	05027102001	209	05028029001	38
05022704001	208	05024008001	215	05027103001	209	05028030001	38
05022705001	208	05024010001	215	05027104001	209	05028031001	38
05022706001	208	05024012001	215	05027105001	209	05028032001	38
05022708001	208	05024013001	215	05027106001	209	05028033001	38
05022709001	208	05024015001	215	05027107001	209	05028034001	38
05022710001	208	05024020001	215	05027108001	209	05028035001	38
05022711001	208	05024100001	214	05027109001	209	05028036001	38
05022712001	208	05024105001	214	05027110001	209	05028037001	38
05022713001	208	05024160001	215	05027111001	209	05028038001	38
05022714001	208	05024161001	215	05027201001	211	05028040001	436
05022715001	208	05024162001	215	05027202001	211	05028041001	436
05022716001	208	05024163001	215	05027203001	211	05028042001	436
05022717001	208	05024164001	215	05027204001	211	05028043001	436
05022718001	208	05024165001	215	05027205001	211	05028044001	436
05022720001	202	05024166001	215	05027206001	211	05028045001	436
05022721001	202	05024167001	215	05027207001	211	05028046001	437
05022728001	77	05024168001	215	05027208001	211	05028048001	36
05022729001	76	05024199001	214	05027209001	211	05028049001	36
05022730001	76	05024200001	214	05027210001	211	05028050001	36
05022731001	76	05024202001	214	05027211001	211	05028051001	36
05022732001	76	05024204001	214	05027212001	211	05028052001	36
05022733001	76	05024206001	214	05027213001	211	05028053001	36
05022734001	76	05024208001	214	05027214001	211	05028054001	36
05022740001	76	05024210001	214	05027215001	211	05028055001	36
05022741001	76	05024242001	213	05027405001	58	05028056001	36
05022745001	77	05024244001	212	05027455001	58	05028059001	45
05022795001	36	05024335001	212	05027456001	65	05028062001	46
05022800001	36	05024350001	214	05027910001	436	05028070001	36
05022805001	36	05024351001	214	05027911001	436	05028071001	36
05022810001	36	05024352001	214	05027912001	436	05028072001	36
05022815001	36	05024353001	214	05027913001	436	05028073001	36
05022820001	36	05024354001	214	05027930001	436	05028074001	46
05022825001	36	05024355001	214	05027931001	436	05028116001	40
05022830001	36	05024356001	214	05027932001	436	05028118001	40
05022835001	36	05024357001	214	05027933001	436	05028120001	40



Code No. Index

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05028122001	40	05030112001	110	05031461001	50	05032051001	21
05028124001	40	05030115001	110	05031463001	50	05032052001	21
05028126001	40	05030116001	110	05031466001	50	05032053001	21
05028130001	38	05030120001	111	05031500001	51	05032054001	21
05028132001	38	05030121001	111	05031501001	51	05032055001	21
05028134001	38	05030122001	111	05031502001	51	05032056001	21
05028136001	38	05030127001	111	05031503001	51	05032057001	21
05028148001	40	05030128001	111	05031504001	51	05032058001	21
05028150001	40	05030129001	111	05031505001	51	05032060001	22
05028152001	40	05030130001	111	05031506001	51	05032061001	22
05028160001	245	05030131001	111	05031507001	51	05032063001	23
05028205001	40	05030150001	112	05031508001	51	05032070002	21
05028210001	40	05030151001	112	05031509001	51	05032071002	21
05028215001	40	05030160001	64	05031510001	51	05040001001	251
05028220001	40	05030170001	112	05031511001	51	05040030001	345
05028225001	40	05030400001	110	05031512001	51	05040031001	345
05028230001	40	05030401001	110	05031551001	52	05040032001	345
05029405001	40	05030402001	110	05031552001	52	05040033001	345
05029410001	40	05030403001	110	05031553001	52	05040034001	345
05029415001	40	05030404001	110	05031554001	52	05040040001	345
05029420001	40	05030405001	110	05031575001	106	05040041001	345
05029425001	40	05030406001	110	05031576001	107	05040042001	345
05029430001	40	05030410001	112	05031580001	106	05040043001	345
05029435001	40	05030411001	112	05031581001	106	05040045001	345
05029440001	40	05030412001	112	05031582001	106	05040046001	345
05029445001	40	05030413001	112	05031583001	106	05040047001	345
05029450001	40	05030414001	112	05031584001	106	05040048001	345
05029460001	41	05030415001	112	05031585001	106	05040049001	345
05029461001	41	05030416001	112	05031587001	106	05042605001	378
05029462001	41	05030417001	112	05031588001	106	05042655001	378
05029463001	41	05030418001	112	05031589001	106	05042665001	378
05029464001	41	05031400001	50	05031600001	106	05042705001	378
05029465001	41	05031401001	50	05031601001	106	05042715001	378
05029466001	41	05031402001	50	05031602001	106	05042750001	378
05029501001	41	05031403001	50	05031603001	106	05042755001	378
05029502001	41	05031405001	50	05031604001	106	05042760001	378
05029503001	41	05031406001	50	05031605001	106	05042765001	378
05029504001	41	05031408001	50	05031610001	106	05042768001	378
05029505001	41	05031409001	50	05031611001	106	05048680001	368
05029506001	41	05031411001	50	05031613001	106	05048681001	368
05029507001	41	05031412001	50	05031615001	106	05050205001	377
05029510001	47	05031413001	50	05032001001	20	05050210001	377
05030080001	112	05031416001	50	05032002001	20	05050215001	377
05030081001	112	05031420001	50	05032003001	20	05050220001	377
05030082001	112	05031421001	50	05032004001	20	05050510001	377
05030083001	112	05031422001	50	05032005001	20	05050650001	377
05030084001	112	05031424001	50	05032006001	20	05051005001	245
05030100001	110	05031425001	50	05032007001	20	05051010001	43
05030101001	110	05031426001	50	05032020001	20	05051011001	43
05030102001	110	05031427001	50	05032021001	20	05051019001	224
05030103001	110	05031440001	50	05032022001	20	05051021001	224
05030104001	110	05031441001	50	05032023001	20	05051023001	224
05030105001	110	05031442001	50	05032030001	20	05051024001	224
05030106001	110	05031444001	50	05032031001	20	05051025001	225
05030107001	110	05031445001	50	05032032001	20	05051030001	248
05030110001	110	05031447001	50	05032033001	20	05051040001	246
05030111001	110	05031460001	50	05032050001	21	05051041001	246

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05051042001	232	05056015001	325	05056400001	267	05056910001	290
05051043001	114	05056020001	325	05056402001	267	05056915001	290
05051045001	134	05056025001	325	05056404001	267	05056925001	290
05051105001	245	05056030001	325	05056410001	268	05056937001	292
05051106001	115	05056037001	325	05056412001	268	05056938001	292
05051205001	245	05056040001	325	05056414001	268	05056939001	292
05051272001	242	05056045001	325	05056420001	268	05057110001	236
05051273001	113	05056064001	324	05056422001	268	05057111001	236
05051274001	245	05056066001	324	05056424001	268	05057115001	402
05051276001	66	05056068001	324	05056440001	398	05057116001	394
05051461001	246	05056155001	403	05056471001	406	05057117001	391
05051462001	242	05056157001	403	05056472001	406	05057122001	398
05051464001	113	05056158001	404	05056473001	406	05057150001	350
05051465001	242	05056159001	400	05056474001	405	05057151001	350
05051482001	243	05056161001	399	05056476001	407	05057152001	350
05051500001	370	05056163001	401	05056490001	184	05057153001	350
05051501001	370	05056164001	402	05056491001	184	05057160001	350
05051502001	370	05056168001	404	05056500001	274	05057161001	350
05051610001	244	05056172001	324	05056505001	273	05057162001	350
05051615001	244	05056174001	324	05056507001	274	05057163001	350
05051620001	244	05056176001	324	05056510001	273	05057210001	327
05051835001	250	05056200001	325	05056515001	274	05057213001	327
05052490001	367	05056203001	324	05056520001	274	05057223001	327
05052500001	366	05056210001	324	05056525001	273	05057225001	327
05052502001	365	05056220001	324	05056535001	274	05057230001	327
05052503001	366	05056225001	324	05056605001	272	05057235001	327
05052504001	366	05056233001	324	05056610001	272	05057240001	327
05052505001	371	05056240001	324	05056625001	272	05057250001	327
05052575001	371	05056285001	404	05056653001	222	05057255001	327
05052625001	371	05056294001	404	05056656001	229	05057402001	397
05052655001	371	05056295001	402	05056660001	273	05057404001	397
05052725001	371	05056296001	403	05056662001	273	05057412001	396
05053175001	374	05056303001	329	05056664001	273	05057414001	396
05053275001	374	05056305001	329	05056680001	328	05057415001	396
05053425001	372	05056310001	329	05056681001	328	05057416001	395
05053455001	372	05056315001	329	05056682001	328	05057417001	385
05053457001	372	05056320001	329	05056683001	328	05057420001	390
05053458001	372	05056325001	329	05056684001	328	05057421001	394
05053459001	372	05056330001	329	05056685001	328	05057422001	409
05053460001	373	05056332001	329	05056686001	328	05057423001	408
05053475001	373	05056335001	329	05056687001	328	05057424001	410
05053480001	373	05056340001	329	05056700001	289	05057425001	388
05053485001	373	05056341001	335	05056702001	289	05057430001	390
05053520001	369	05056342001	335	05056704001	289	05057431001	394
05053522001	369	05056343001	335	05056710001	290	05057432001	408
05053560001	369	05056344001	335	05056712001	290	05057433001	408
05053870001	370	05056345001	335	05056714001	290	05057434001	410
05053872001	369	05056346001	335	05056720001	290	05057441001	390
05053920001	370	05056350001	329	05056722001	290	05057442001	408
05053923001	364	05056352001	329	05056724001	290	05057450001	398
05055950001	345	05056354001	329	05056805001	292	05057455001	398
05055951001	345	05056356001	329	05056810001	292	05057460001	237
05055952001	345	05056358001	329	05056812001	292	05057505001	333
05055953001	345	05056368001	392	05056815001	292	05057510001	333
05056005001	325	05056374001	391	05056820001	292	05057515001	333
05056007001	325	05056375001	400	05056825001	292	05057520001	333
05056010001	325	05056376001	401	05056835001	292	05057525001	333



Code No. Index

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05057530001	333	05057684001	385	05059532001	276	05059775001	280
05057550001	333	05057688001	385	05059534001	276	05059780001	280
05057551001	333	05057690001	384	05059540001	277	05059785001	280
05057552001	333	05057691001	386	05059542001	277	05059786001	280
05057553001	333	05057692001	386	05059544001	277	05059790001	280
05057554001	333	05057693001	386	05059550001	277	05059795001	280
05057555001	333	05057695001	386	05059552001	277	05059800001	280
05057560001	333	05057705001	282	05059554001	277	05059802001	280
05057561001	333	05057710001	282	05059602001	331	05059805001	280
05057562001	333	05057715001	282	05059603001	331	05059810001	280
05057563001	333	05057720001	282	05059604001	331	05059815001	280
05057565001	333	05057725001	282	05059605001	331	05059855001	279
05057566001	333	05057908001	399	05059610001	331	05059860001	279
05057567001	333	05058005001	298	05059615001	331	05059865001	279
05057568001	333	05058010001	298	05059620001	331	05059896001	301
05057570001	333	05058015001	298	05059625001	331	05059897001	301
05057571001	333	05058020001	298	05059628001	331	05059900001	296
05057572001	333	05058025001	298	05059629001	331	05059902001	296
05057573001	333	05059030001	96	05059630001	331	05059904001	296
05057574001	333	05059291001	94	05059631001	331	05059910001	296
05057575001	333	05059293001	230	05059632001	331	05059912001	296
05057603001	328	05059294001	232	05059633001	331	05059914001	296
05057604001	328	05059295001	232	05059634001	331	05059920001	296
05057605001	328	05059297001	233	05059635001	331	05059922001	296
05057606001	328	05059298001	228	05059636001	331	05059924001	296
05057615001	266	05059299001	228	05059640001	335	05060005001	297
05057616001	266	05059305001	326	05059641001	335	05060010001	297
05057617001	266	05059307001	326	05059642001	335	05060015001	297
05057620001	288	05059310001	326	05059643001	335	05060027001	297
05057621001	288	05059315001	326	05059644001	335	05060029001	297
05057622001	288	05059320001	326	05059645001	335	05060030001	297
05057623001	302	05059325001	326	05059660001	331	05060031001	297
05057624001	302	05059330001	326	05059661001	331	05060033001	297
05057625001	302	05059335001	326	05059662001	331	05060035001	297
05057626001	302	05059337001	326	05059663001	331	05060036001	297
05057627001	302	05059340001	326	05059664001	331	05060037001	297
05057628001	302	05059345001	326	05059665001	331	05060038001	297
05057631001	336	05059450001	326	05059666001	331	05060041001	297
05057632001	336	05059451001	326	05059667001	331	05060043001	297
05057644001	330	05059452001	326	05059668001	331	05060045001	297
05057645001	330	05059453001	326	05059680001	332	05060047001	297
05057646001	330	05059466001	326	05059681001	332	05060048001	317
05057656001	276	05059472001	326	05059682001	332	05060049001	317
05057657001	276	05059478001	326	05059683001	332	05060050001	317
05057661001	294	05059480001	326	05059700001	308	05060051001	317
05057662001	294	05059486001	326	05059701001	308	05060052001	317
05057664001	308	05059488001	326	05059702001	308	05060053001	317
05057665001	308	05059489001	326	05059703001	308	05060054001	317
05057666001	308	05059490001	326	05059704001	308	05060055001	297
05057667001	308	05059492001	326	05059705001	308	05060056001	317
05057671001	338	05059496001	326	05059720001	300	05060057001	317
05057672001	338	05059500001	326	05059721001	300	05060060001	297
05057675001	360	05059503001	327	05059755001	280	05060065001	297
05057676001	360	05059507001	327	05059760001	280	05060080001	309
05057680001	384	05059515001	327	05059765001	280	05060081001	309
05057682001	384	05059517001	327	05059766001	280	05060082001	309
05057683001	384	05059530001	276	05059770001	280	05060083001	309

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05060084001	309	05060202001	310	05060423001	352	05066077001	304
05060085001	309	05060210001	352	05060424001	352	05066078001	304
05060086001	309	05060215001	352	05060425001	352	05066080001	307
05060087001	309	05060220001	352	05060426001	352	05066081001	307
05060098001	310	05060225001	352	05060427001	352	05066082001	307
05060100001	310	05060230001	352	05060428001	352	05066083001	307
05060105001	310	05060235001	352	05060429001	352	05066084001	307
05060110001	310	05060237001	352	05060430001	352	05066085001	307
05060115001	310	05060238001	352	05060431001	352	05066100001	303
05060120001	310	05060240001	352	05060432001	352	05066102001	303
05060125001	310	05060255001	352	05064140001	312	05066104001	303
05060130001	310	05060260001	352	05064144001	312	05066106001	303
05060131001	310	05060265001	352	05064146001	312	05066108001	303
05060132001	310	05060272001	351	05064148001	312	05066110001	303
05060133001	310	05060274001	351	05064150001	312	05066120001	304
05060134001	310	05060276001	351	05064155001	312	05066122001	304
05060135001	310	05060278001	351	05064160001	312	05066124001	304
05060136001	310	05060280001	351	05064166001	313	05066126001	304
05060137001	310	05060281001	351	05064168001	313	05066128001	304
05060138001	310	05060282001	351	05064170001	313	05066130001	304
05060139001	317	05060283001	351	05064175001	313	05066150001	344
05060140001	317	05060284001	351	05064180001	313	05066155001	344
05060141001	317	05060286001	351	05064185001	313	05066160001	344
05060142001	317	05060288001	351	05064190001	313	05066165001	344
05060143001	317	05060290001	351	05064200001	313	05066170001	344
05060144001	317	05060296001	339	05065075001	283	05066175001	344
05060145001	317	05060297001	339	05065081001	283	05066180001	344
05060146001	317	05060298001	339	05065090001	298	05066185001	344
05060147001	338	05060300001	339	05065096001	298	05066190001	344
05060148001	338	05060301001	339	05065110001	283	05066195001	344
05060149001	338	05060302001	339	05065112001	283	05066200001	344
05060150001	339	05060303001	339	05065114001	283	05066272001	318
05060155001	339	05060304001	339	05065116001	283	05066274001	318
05060160001	339	05060360001	309	05065125001	299	05066276001	318
05060165001	339	05060361001	309	05065127001	299	05066278001	318
05060170001	339	05060362001	309	05065129001	299	05066279001	318
05060175001	339	05060363001	309	05065150001	284	05066280001	318
05060180001	339	05060364001	309	05065152001	284	05066282001	318
05060182001	339	05060365001	309	05065154001	284	05066284001	318
05060184001	339	05060366001	309	05065167001	299	05066286001	318
05060185001	310	05060380001	347	05065169001	299	05066287001	318
05060186001	310	05060400001	351	05065197001	284	05066288001	318
05060187001	310	05060401001	351	05066030001	323	05066290001	318
05060188001	310	05060402001	351	05066031001	323	05066300001	305
05060189001	310	05060403001	351	05066032001	323	05066301001	305
05060190001	310	05060404001	351	05066033001	323	05066302001	305
05060191001	310	05060405001	351	05066040001	323	05066303001	305
05060192001	310	05060406001	351	05066041001	323	05066304001	305
05060193001	310	05060407001	351	05066042001	323	05066305001	305
05060194001	310	05060408001	351	05066043001	323	05066308001	305
05060195001	310	05060409001	351	05066070001	304	05066310001	305
05060196001	310	05060410001	351	05066071001	304	05066312001	305
05060197001	310	05060411001	351	05066072001	304	05066313001	305
05060198001	310	05060412001	351	05066073001	304	05066315001	305
05060199001	310	05060420001	352	05066074001	304	05066320001	305
05060200001	310	05060421001	352	05066075001	304	05066325001	306
05060201001	310	05060422001	352	05066076001	304	05066330001	306



Code No. Index

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05066335001	306	05066622001	340	05066770001	343	05071020001	288
05066394001	337	05066624001	340	05066772001	343	05071021001	288
05066395001	337	05066626001	340	05066774001	343	05071022001	288
05066396001	337	05066628001	340	05066780001	343	05071025001	336
05066400001	337	05066630001	340	05066782001	343	05071030001	302
05066405001	337	05066632001	340	05066784001	343	05071031001	302
05066410001	337	05066633001	340	05066785001	343	05071032001	302
05066415001	337	05066634001	340	05066786001	343	05071033001	302
05066420001	337	05066635001	340	05066787001	343	05071034001	302
05066445001	336	05066638001	340	05066788001	343	05071035001	302
05066446001	336	05066640001	340	05066790001	343	05071036001	302
05066447001	336	05066642001	340	05066792001	343	05071037001	302
05066450001	307	05066644001	340	05066794001	343	05071038001	302
05066455001	307	05066646001	340	05066850001	346	05071041001	294
05066460001	307	05066650001	342	05066851001	346	05071046001	308
05066465001	307	05066652001	342	05066852001	346	05071047001	308
05066470001	307	05066654001	342	05066853001	346	05071049001	330
05066475001	307	05066656001	342	05066854001	346	05071060001	328
05066480001	307	05066658001	342	05066860001	346	05071061001	328
05066485001	306	05066660001	341	05066861001	346	05071062001	328
05066486001	306	05066662001	341	05066862001	346	05071063001	328
05066487001	306	05066664001	341	05066863001	346	05071064001	328
05066488001	306	05066666001	341	05066864001	346	05071065001	328
05066489001	306	05066668001	341	05066900001	311	05071066001	328
05066490001	306	05066670001	341	05066901001	311	05071070001	328
05066491001	306	05066672001	341	05066902001	311	05071071001	328
05066492001	306	05066674001	341	05066905001	311	05071072001	328
05066493001	306	05066676001	341	05066910001	311	05071073001	328
05066494001	306	05066678001	341	05066915001	311	05071074001	328
05066495001	306	05066680001	341	05066920001	311	05071075001	328
05066496001	306	05066682001	341	05066925001	311	05071076001	328
05066497001	316	05066683001	341	05066930001	311	05071077001	328
05066498001	316	05066684001	341	05066931001	311	05071080001	326
05066499001	316	05066685001	341	05066932001	311	05071081001	276
05066500001	316	05066686001	341	05066933001	311	05071082001	276
05066505001	316	05066687001	341	05066934001	311	05071083001	276
05066510001	316	05066688001	341	05066935001	311	05071084001	294
05066515001	316	05066690001	341	05066936001	311	05071085001	294
05066520001	316	05066692001	341	05066937001	311	05071086001	294
05066525001	316	05066694001	341	05066938001	311	05071089001	317
05066530001	316	05066696001	341	05066939001	311	05071090001	317
05066601001	348	05066700001	342	05066940001	311	05071091001	317
05066602001	348	05066702001	342	05066941001	311	05071092001	317
05066603001	348	05066704001	342	05066942001	311	05071094001	317
05066604001	348	05066740001	342	05066943001	311	05071097001	338
05066605001	348	05066742001	342	05066945001	311	05071098001	338
05066606001	348	05066744001	342	05066946001	311	05071099001	338
05066607001	348	05066746001	342	05066947001	311	05071100001	364
05066610001	349	05066750001	342	05066948001	311	05071101001	330
05066611001	349	05066752001	342	05066949001	311	05071102001	330
05066612001	349	05066754001	342	05066950001	311	05071103001	330
05066613001	349	05066758001	343	05071000001	324	05071104001	330
05066614001	349	05066760001	343	05071001001	324	05071105001	330
05066615001	349	05066762001	343	05071002001	324	05071106001	330
05066618001	340	05066764001	343	05071010001	266	05071107001	330
05066619001	340	05066766001	343	05071011001	266	05071108001	330
05066620001	340	05066768001	343	05071012001	266	05071109001	388

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05071110001	388	05073271001	192	05073373001	290	05073596001	204
05071116001	230	05073272001	192	05073375001	306	05073598001	213
05071117001	231	05073273001	192	05073376001	306	05073599001	212
05071222001	351	05073274001	192	05073380001	292	05073610001	266
05071223001	351	05073275001	192	05073391001	204	05073611001	266
05071224001	351	05073276001	192	05073401001	372	05073612001	266
05071225001	351	05073277001	192	05073403001	58	05073613001	288
05071228001	351	05073278001	192	05073404001	404	05073614001	288
05072014001	449	05073279001	192	05073406001	402	05073615001	288
05072017001	449	05073280001	192	05073410001	400	05073616001	364
05072050001	325	05073281001	192	05073416001	400	05073620001	302
05072055001	325	05073282001	192	05073418001	392	05073621001	302
05072057001	325	05073283001	192	05073419001	395	05073622001	302
05072059001	325	05073284001	192	05073420001	364	05073623001	302
05072061001	325	05073285001	192	05073421001	365	05073624001	302
05072063001	325	05073286001	192	05073495001	354	05073625001	302
05072065001	325	05073287001	192	05073500001	352	05073626001	302
05072070001	274	05073290001	194	05073501001	352	05073630001	388
05072072001	274	05073295001	194	05073502001	352	05073634001	389
05072074001	274	05073300001	325	05073503001	352	05073635001	405
05072080001	292	05073301001	325	05073504001	352	05073637001	406
05072082001	292	05073302001	325	05073505001	352	05073638001	406
05072084001	292	05073303001	325	05073506001	352	05073640001	182
05072400001	274	05073304001	274	05073507001	352	05073645001	186
05072401001	274	05073305001	274	05073508001	352	05073660001	248
05072402001	274	05073306001	274	05073509001	352	05073661002	248
05072403001	293	05073307001	274	05073510001	352	05073665001	247
05072404001	293	05073308001	292	05073511001	367	05073670001	115
05072405001	293	05073309001	292	05073512001	272	05073671001	114
05072406001	306	05073310001	292	05073513001	272	05073675001	66
05072407001	306	05073311001	292	05073514001	272	05073680001	59
05072408001	306	05073313001	306	05073515001	272	05073681001	59
05072409001	306	05073314001	306	05073516001	291	05073720001	310
05072410001	306	05073315001	306	05073517001	291	05073721001	310
05072411001	306	05073316001	306	05073518001	291	05073722001	310
05072412001	306	05073317001	306	05073519001	291	05073723001	310
05072440001	274	05073318001	369	05073520001	280	05073724001	310
05072441001	274	05073323001	273	05073521001	280	05073890001	386
05072443001	293	05073324001	273	05073522001	280	05073904001	328
05072444001	293	05073325001	273	05073523001	297	05073905001	328
05072446001	306	05073326001	273	05073524001	297	05073906001	328
05072447001	306	05073332001	267	05073525001	297	05073916001	266
05072448001	306	05073333001	267	05073526001	310	05073917001	266
05072449001	306	05073334001	267	05073527001	310	05073921001	288
05072450001	306	05073335001	267	05073528001	310	05073922001	288
05072451001	306	05073336001	289	05073529001	310	05073924001	302
05072452001	306	05073337001	289	05073530001	310	05073925001	302
05073200001	377	05073338001	289	05073531001	310	05073926001	302
05073210001	375	05073339001	289	05073534001	396	05073927001	302
05073220001	185	05073340001	306	05073536001	403	05073931001	336
05073230001	186	05073342001	329	05073537001	404	05073932001	336
05073240001	226	05073344001	329	05073538001	405	05073944001	330
05073260001	134	05073346001	306	05073540001	242	05073945001	330
05073261001	148	05073357001	372	05073541001	243	05073946001	330
05073262001	162	05073370001	290	05073544001	202	05073956001	276
05073268001	192	05073371001	290	05073593001	202	05073957001	276
05073270001	192	05073372001	290	05073594001	206	05073961001	294



Code No. Index

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05073962001	294	05075394001	442	05100070001	39	05104667001	411
05073964001	308	05075396001	442	05100071001	39	05104668001	411
05073965001	308	05075400001	442	05100072001	39	05104669001	411
05073966001	308	05075401001	442	05100075001	26	05104670001	411
05073967001	308	05075402001	442	05100076001	26	05104671001	411
05073971001	338	05075403001	442	05100077001	26	05104672001	411
05073972001	338	05075405001	442	05100080001	27	05104900001	86
05073980001	384	05075407001	442	05100081001	27	05104901001	86
05073990001	360	05075412001	442	05100082001	27	05104902001	86
05074700001	422	05075415001	442	05100085001	26	05104903001	86
05074701001	422	05075417001	442	05100086001	26	05104904001	86
05074702001	422	05075420001	443	05100087001	26	05104905001	86
05074705001	422	05075425001	443	05100100001	87	05104906001	86
05074710001	424	05075430001	443	05104600001	413	05104907001	86
05074711001	424	05077000001	439	05104601001	413	05105622001	45
05074712001	424	05077001001	439	05104602001	413	05105630001	43
05074715001	430	05077002001	439	05104603001	413	05105631001	88
05074716001	430	05077003001	439	05104604001	413	05105650001	44
05074717001	430	05077004001	439	05104605001	413	05105656001	44
05074720001	432	05077005001	439	05104610001	413	05110000001	32
05074721001	432	05077006001	439	05104611001	413	05110001001	32
05074722001	432	05078185001	444	05104612001	413	05110002001	32
05074728001	430	05078190001	444	05104613001	413	05110003001	32
05074730001	423	05078195001	444	05104614001	413	05110004001	32
05074731001	423	05078200001	444	05104615001	413	05110005001	32
05074733001	424	05078205001	444	05104616001	413	05110006001	32
05074734001	424	05078210001	444	05104617001	413	05110007001	32
05074738001	426	05078340001	444	05104618001	413	05110008001	32
05074739001	426	05078345001	444	05104619001	413	05110010001	32
05074745001	426	05100000001	80	05104620001	413	05110011001	32
05074746001	427	05100001001	80	05104621001	413	05110050001	33
05074750001	98	05100002001	80	05104622001	413	05110051001	33
05074752001	98	05100003001	80	05104630001	412	05110052001	33
05074757001	98	05100004001	80	05104631001	412	05110053001	33
05074770001	422	05100011001	81	05104632001	412	05110054001	33
05074772001	422	05100012001	81	05104633001	412	05110055001	33
05074774001	422	05100015001	82	05104634001	412	05110068001	42
05074780001	423	05100016001	82	05104635001	412	05110069001	42
05074782001	423	05100024001	86	05104640001	412	05110070001	42
05074784001	423	05100025001	86	05104641001	412	05110075001	42
05074786001	425	05100026001	86	05104642001	412	05110078001	42
05074788001	425	05100030001	33	05104643001	412	05110104001	32
05074790001	430	05100031001	33	05104644001	412	05110105001	32
05074792001	430	05100042001	32	05104645001	412	05110150001	33
05074794001	430	05100043001	32	05104650001	412	05110151001	33
05074800001	433	05100044001	32	05104651001	413	05117680001	39
05074802001	425	05100050001	34	05104652001	413	05117681001	39
05074804001	425	05100051001	34	05104653001	415	05117682001	39
05074810001	433	05100052001	34	05104654001	411	05117683001	39
05074820001	431	05100055001	35	05104655001	412	05117684001	39
05074822001	431	05100056001	35	05104660001	411	05117685001	39
05074824001	431	05100057001	35	05104661001	411	05117686001	39
05074826001	433	05100060001	37	05104662001	411	05117687001	39
05074828001	433	05100061001	37	05104663001	411	05117688001	39
05074840001	431	05100062001	37	05104664001	411	05117689001	39
05074842001	431	05100063001	37	05104665001	411	05117691001	39
05075393001	442	05100064001	37	05104666001	411	05117990001	62

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05117991001	62	05118103001	64	05134377001	303	05134720001	322
05117992001	62	05118106001	64	05134378001	303	05134722001	322
05117993001	62	05118108001	65	05134379001	303	05134723001	322
05117994001	62	05118109001	65	05134380001	280	05134732001	322
05117995001	62	05118110001	65	05134381001	280	05134740001	310
05118000001	62	05118112001	65	05134382001	280	05134800001	339
05118002001	62	05118114001	65	05134384001	297	05134801001	339
05118003001	62	05118116001	65	05134385001	297	05134802001	339
05118004001	62	05118118001	65	05134386001	297	05134805001	339
05118005001	62	05118120001	65	05134397001	373	05134806001	339
05118006001	62	05118122001	65	05134398001	372	05134807001	339
05118007001	62	05118124001	65	05134399001	376	05134905001	274
05118008001	62	05118126001	65	05134480001	372	05134906001	278
05118010001	62	05118128001	65	05134491001	226	05134907001	278
05118012001	62	05118130001	65	05134500001	321	05134908001	278
05118014001	62	05118132001	65	05134654001	322	05134909001	278
05118017001	62	05118134001	65	05134655001	322	05134910001	278
05118019001	62	05118135001	65	05134656001	322	05134911001	278
05118020001	62	05118136001	65	05134657001	322	05134912001	278
05118022001	62	05118137001	65	05134658001	322	05134913001	278
05118023001	62	05118150001	66	05134664001	319	05134914001	278
05118024001	62	05118152001	67	05134665001	319	05134915001	278
05118030001	62	05118154001	67	05134667001	319	05134919001	268
05118032001	62	05118156001	67	05134668001	319	05134920001	268
05118035001	63	05118158001	67	05134669001	319	05134921001	268
05118036001	63	05118180001	62	05134670001	319	05134929001	278
05118037001	63	05118181001	62	05134671001	319	05134930001	278
05118039001	63	05118182001	62	05134672001	319	05134931001	278
05118040001	63	05118183001	62	05134673001	319	05134932001	278
05118042001	63	05118184001	62	05134674001	319	05134940001	268
05118044001	63	05118185001	62	05134675001	319	05134941001	268
05118046001	63	05118186001	62	05134676001	319	05134942001	268
05118048001	63	05133150001	210	05134677001	319	05134950001	278
05118050001	63	05133151001	210	05134678001	319	05134951001	278
05118052001	63	05133152001	210	05134679001	319	05134952001	278
05118054001	63	05133153001	210	05134680001	319	05135003001	290
05118060001	64	05133154001	210	05134681001	319	05135005001	271
05118062001	64	05133155001	210	05134682001	319	05135008001	269
05118064001	64	05133156001	210	05134683001	319	05135009001	271
05118066001	64	05133157001	210	05134684001	319	05135017001	290
05118068001	64	05133158001	210	05134685001	319	05135040001	275
05118070001	64	05133163001	208	05134686001	319	05135041001	275
05118072001	64	05133180001	205	05134687001	319	05135042001	275
05118074001	64	05133285001	28	05134688001	319	05135060001	329
05118075001	64	05133355001	91	05134690001	319	05135068001	329
05118076001	64	05133356001	89	05134691001	319	05135069001	329
05118078001	64	05133862001	178	05134695001	318	05135070001	329
05118080001	64	05134001001	59	05134698001	322	05135071001	329
05118082001	64	05134002001	58	05134699001	322	05135072001	329
05118089001	64	05134200001	399	05134700001	322	05135073001	329
05118090001	64	05134370001	278	05134701001	322	05135074001	329
05118092001	64	05134371001	278	05134702001	322	05135075001	329
05118094001	64	05134372001	278	05134703001	322	05135076001	329
05118096001	64	05134373001	278	05134704001	322	05135077001	329
05118098001	64	05134374001	303	05134705001	322	05135078001	329
05118100001	64	05134375001	303	05134706001	322	05135079001	329
05118102001	64	05134376001	303	05134707001	322	05135080001	333



Code No. Index

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05135081001	333	05135291001	285	05136220001	311	05332606001	320
05135082001	333	05135380001	286	05137810001	56	05332607001	314
05135083001	333	05135381001	286	05138070001	36	05332609001	314
05135084001	333	05135382001	286	05138250001	46	05332610001	314
05135090001	331	05135383001	286	05138257001	38	05332612001	320
05135091001	331	05135384001	286	05138258001	38	05340245001	337
05135092001	331	05135385001	286	05138259001	38	05340260001	393
05135093001	331	05135386001	286	05138260001	38	05340322001	403
05135094001	331	05135387001	286	05138261001	38	05340330001	32
05135095001	331	05135400001	314	05138262001	38	05342920001	303
05135096001	331	05135401001	314	05138263001	38	05344280001	321
05135097001	331	05135402001	314	05138264001	38	05344281001	321
05135098001	331	05135403001	314	05138265001	38	05344282001	321
05135099001	331	05135404001	314	05138266001	38	05344511001	378
05135120001	318	05135405001	314	05138268001	38	05344512001	378
05135121001	318	05135406001	314	05138269001	38	05344513001	378
05135140001	306	05135407001	314	05138270001	38	05344514001	378
05135141001	306	05135408001	314	05140310001	252	05344515001	341
05135142001	306	05135409001	314	05160785001	133	05344536001	70
05135143001	306	05135420001	315	05160821001	322	05344537001	70
05135200001	310	05135421001	315	05160830001	310	05344538001	70
05135201001	310	05135422001	315	05160895001	281	05344540001	70
05135202001	310	05135423001	315	05160896001	279	05344541001	70
05135204001	310	05135424001	315	05160899001	279	05344542001	70
05135205001	310	05135425001	315	05160901001	281	05344543001	70
05135220001	314	05135430001	320	05160908001	281	05344544001	70
05135221001	314	05135431001	320	05160917001	319	05344545001	70
05135222001	314	05135432001	320	05160924001	373	05344546001	70
05135230001	320	05135433001	320	05160956001	318	05344900001	320
05135231001	320	05135434001	320	05160976001	373	05345018001	314
05135232001	320	05135435001	320	05160977001	373	05345019001	320
05135233001	320	05135436001	320	05160979001	373	05345026001	314
05135234001	320	05135440001	321	05160981001	373	05345028001	314
05135235001	320	05135441001	321	05160983001	278	05345032001	314
05135265001	327	05135442001	321	05160987001	367	05345035001	314
05135266001	327	05135443001	321	05160988001	367	05345047001	310
05135267001	327	05135530001	280	05200995001	186	05345056001	314
05135268001	334	05135531001	280	05204126001	322	05345280001	86
05135269001	334	05135532001	280	05221102001	333	05345281001	65
05135270001	285	05135705001	282	05221110001	341	05345282001	65
05135271001	285	05135706001	282	05223161001	45	05345284001	64
05135272001	285	05135902001	353	05259135001	322	05345285001	64
05135273001	285	05135903001	353	05300004001	112	05345290001	62
05135274001	285	05135904001	353	05302400001	320	05345291001	62
05135275001	285	05135918001	183	05302402001	320	05345350001	314
05135276001	285	05135926001	238	05302403001	320	05345351001	314
05135277001	285	05135927001	240	05308428001	310	05345352001	314
05135278001	285	05135928001	239	05311517001	376	05346280001	244
05135280001	285	05135938001	66	05314753001	314	05346281001	269
05135281001	285	05135939001	238	05319835001	310	05346285001	281
05135284001	285	05135942001	222	05320430001	319	05346286001	281
05135285001	285	05135949001	131	05320540001	45	05346287001	281
05135286001	285	05135961001	91	05324901001	341	05346288001	331
05135287001	285	05136000001	376	05326310001	320	05346293001	182
05135288001	285	05136001001	376	05328448001	310	05347100001	372
05135289001	285	05136002001	376	05328463001	115	05347106001	43
05135290001	285	05136011001	415	05332600001	310	05347107001	96

Code No.	Page	Code No.	Page	Code No.	Page	Code No.	Page
05347108001	95	05380104001	329	05380155001	269	05480173001	272
05347153001	392	05380105001	329	05380156001	269	05480221001	291
05347743001	35	05380106001	329	05380157001	269	05480222001	291
05347777001	90	05380107001	329	05380158001	269	05480223001	291
05347778001	47	05380108001	329	05380160001	278	05671381001	196
05350430001	331	05380109001	329	05380161001	278	05671382001	196
05350451001	426	05380110001	329	05380200001	280	05671383001	196
05380033001	331	05380124001	332	05380201001	280	05671385001	67
05380045001	331	05380125001	332	05380202001	280	05671386001	226
05380046001	331	05380126001	332	05380380001	286	05671387001	233
05380047001	331	05380127001	332	05380381001	286	05671388001	97
05380048001	331	05380128001	332	05380382001	286		
05380049001	331	05380129001	332	05380383001	286		
05380050001	331	05380130001	332	05480171001	272		
05380103001	329	05380131001	332	05480172001	272		



Article No. Index

1

100	452
100 L	453
100 S	452
101	452
101 L	453
102	452
102 L	453
160 i SB	80
160 i VDE	80
160 i/162 i/167 i/9	90
160 i/165 i/7	89
160 i/168 i/6	91
160 i/6	88
160 i/7	89
160 iS	80
160 iS/7	90
160 iSS	80
160 iSS/7	90
162 i VDE	81
162 i VDE SB	81
162 i PH/S VDE	83
162 iS	82
162 iS PH/S	84
162 iSS	82
164 i VDE	85
165 i PZ/S VDE	84
165 i VDE	82
165 i VDE SB	82
165 iS	83
165 iS PZ/S	84
165 iSS PZ/S	84
167 i TORX® VDE	85
167 i/6 TORX® VDE	89
168 i VDE	86
168 i VDE SB	86
190 i VDE	86
1013 Kraftform Micro	66
1013 Kraftform Micro ESD	112
1160 i VDE	106
1160 i/7 VDE	106
1160 i/1165 i/7 VDE	107
1162 i VDE	106
1165 i VDE	106
1267 A TORX®	57
1267 A TORX PLUS®	57

1267 B TORX®	57
1267 B TORX PLUS®	57
1334	50
1334/6	52
1334/1355/6	52
1335	50
1335/1350/1355/6	52
1350	50
1355	50
1367 TORX®	51
1367/6 TORX®	52
1427	58
1428	58
1429	65
1430 ESD	425
1440/1442	59
1441	59
1460 Micro ESD	433
1550 Micro	110
1555 Micro	110
1567 TORX® B0	111
1567 TORX® HF Micro	110
1567 TORX® Micro	111
1569 ESD	112
1572 ESD	112
1578 A Micro	110
1578 A/6	112

2

247	87
247 SB	87
2035	62
2035/6 A	66
2035/6 B	67
2050	62
2052	64
2052/6	67
2054	64
2055	62
2067 TORX®	63
2067 TORX® B0	63
2067 TORX® HF	62
2067/6 TORX® B0	67
2069	65
2069/6	67

2073	64
2090	449
2090/17	449

3

300 Hex	436
300 Hex Pistol	436
300 IP	436
300 IP Pistol	437
300 TX	436
300 TX Pistol	437
334	32
334 SB	33
334/6	44
334 SK	32
334 SK/6	44
334/355/6	44
334/355 SK/6	44
334/368/6	47
335	32
335 SB	32
335/350/355/6	45
335/350/367/7	45
336	42
350	34
350 SB	34
350 SK	34
352	36
354	36
355	35
355 SB	35
355 SK	35
367 TORX®	37
367 TORX® B0	38
367 TORX® HF	36
367 TORX® K	38
367 TORX® SB	37
367/4 TORX® HF	46
367/6 TORX®	46
367/6 TORX® B0	46
367/6 TORX® HF	45
367/7 TORX® HF	45
367 TORX PLUS®	38
368	39

368 SB	39
371 TORQ-SET® Mplus	38
375 TRI-WING®	40
378 B	33
391	40
392	245
395	40
395 H0	41
395 H0/7 SM	47
3160 i VDE	76
3160 i VDE/7	77
3162 i VDE	76
3165 i VDE	76
3165 i VDE/6	77
3334	20
3334/6	22
3334/3350/3355/6	23
3334/3355/6	22
3335	20
3350	20
3355	20
3367 TX	21
3368	21
3800/1 TS	324
3800/4	326
3816 R	242
3840/1 TS	328
3840/4	330
3851/1 TS	266
3851/1 TS SB	266
3851/4	276
3855/1 TS	288
3855/1 TS SB	288
3855/4	294
3867/1 TS TORX®	302
3867/1 TS TORX® SB	302
3867/4 TORX®	308
3867/4 TORX® B0	317
3868/1	336
3868/4	338
3869/4	351
3888/4/1 K	364
3888/4/1 K SB	364
3950 PKL	208
3950 PKL inch	208
3950 PKL/9	202
3950 PKL/9 SB	202
3950 PKL/9 SZ	202

Article No. Index

4

454	70
454 inch	70
467 TORX®	70
489 R	71
495	71

6

68	252
----	-----

7

700 A HTS	345
700 B HTS	345
700 C HTS	345
712	251
780 A	378
780 B	378
780 C	378
784 A/1	378
784 B	378
784 C	378
797 A/4/1 B	368
797 B/4/1 B	368
7000	442, 443
7100	439
7400	422
7400 ESD	423
7400 ESD Halfmoon	425
7400 ESD Halfmoon pre-set	433
7400 ESD inch	424
7400 inch	424
7400 Pistol	422
7400 Pistol inch	424

7400 Pistol inch	432
7400 Pistol pre-set	430
7400 pre-set	430
7400 pre-set ESD	431
7400 pre-set inch	432
7400 VDE	98
7440/41	426
7440/41/42	426
7443/12	427
7443/61/9	426
7445/46/47	426
7772 ABC	444
7773 ABC	444
7782 C	444
7783 C	444

8

80	250
80 RA	247
81	251
82	251
83	252
84	252
85	252
86	252
87	252
88/1	250
800/1 BDC	324
800/1 BTZ	324
800/1 HTN	345
800/1 TZ	324
800/1 Z	325
800/1 Z Set	325
800/2 Z	327
800/4 Z	326
800/51/55/1 Z Set D	325
800/9 C	327
807/4 Z	327
810/1 ESD	115
810/1 Vario	245
811/1 ESD	115
811/1 Vario	245
812/1 Vario	245

813	245	851/1 IMP DC	266
813 R	242	851/1 IMP DC SB	266
813 R ESD	113	851/1 J	275
816 R	242	851/1 RDC	269
816 R ESD	113	851/1 RH	269
816 R SB	242	851/1 RZ	271
816 RA	246	851/1 RZ SB	271
817 R	243	851/1 TH	272
817 R SB	243	851/1 TiN	272
817 VDE	98	851/1 TiN SB	272
819/1 Vario	244	851/1 TZ	273
819/1/6	244	851/1 TZ SB	273
819/1/6 PH	244	851/1 Z	274
820/1/6	244	851/1 Z DIY	274
830	250	851/1 Z SB	274
840/1 BTZ	328	851/2 Z	282
840/1 IMP DC	328	851/11	283
840/1 IMP DC SB	328	851/12	283
840/1 Z	329	851/15	284
840/1 Z BO	335	851/16	284
840/1 Z SB	329	851/4 A	278
840/2 Z	333	851/4 ADC	278
840/4 IMP DC	330	851/4 BDC	276
840/4 IMP DC SB	330	851/4 BTH	277
840/4 Z	331	851/4 BTZ	277
840/4 Z BO	335	851/4 IMP DC	276
840/9 C	334	851/4 IMP DC SB	276
842/1 Z	329	851/4 J	280
842/4	332	851/4 PH/S	300
843	411	851/4 R	279
844	411	851/4 RH	278
844/7	411	851/4 TH	279
845	411	851/4 TZ	280
845/8	412	851/4 TZ SB	280
846 HSS	412	851/4 Z	280
846/8	412	851/4 Z SB	280
847 HSS	412	851/9 C	285
847/7 HSS	413	851/21 J	285
848 HSS	413	851/22	286
848/851/867/19	413	851/23	282
849 HSS	413	851/25 H	286
849/855/867/18	415	853/1 TZ ACR®	273
851/1 A	268	853/4 ACR	281
851/1 ADC	268	853/4 Harpoon ACR®	281
851/1 AH	269	855/1 BDC	289
851/1 BDC	267	855/1 BDC SB	289
851/1 BDCSB	267	855/1 BTH	290
851/1 BTH	268	855/1 BTZ	290
851/1 BTZ	268	855/1 IMP DC	288



Article No. Index

8

855/1 IMP DC SB	288
855/1 RZ	290
855/1 TH	290
855/1 TH SB	290
855/1 TiN	291
855/1 TiN SB	291
855/1 TZ	292
855/1 Z	292
855/1 Z DIY	293
855/1 Z SB	292
855/2 Z	298
855/4 BDC	296
855/4 BTH	296
855/4 BTZ	296
855/4 IMP DC	294
855/4 IMP DC SB	294
855/4 PZ/S	301
855/4 TH	297
855/4 TZ	297
855/4 TZ SB	297
855/4 Z	297
855/4 Z SB	297
855/11	298
855/12	299
855/15	299
856/1 TZ ACR®	292
857/1 Z	350
857/4 Z	350
860/1 XZN	344
860/4 XZN	344
864/1 BTZ	323
864/1 Z	323
867/1 TORX® BDC	303
867/1 TORX® BDC SB	303
867/1 TORX® BTZ	304
867/1 TORX® DIY	306
867/1 TORX® DIY 100	306
867/1 TORX® IMP DC	302
867/1 TORX® IMP DC SB	302
867/1 TORX® IPR	322
867/1 TORX® SB	306
867/1 TZ TORX®	305
867/1 Z TORX® B0	316
867/1 Z TORX® HF	304

867/1 Z TORX® W	307
867/1 ZA TORX®	307
867/2 Z TORX®	311
867/4 TORX® HF	309
867/4 TORX® IMP DC	308
867/4 TORX® IMP DC SB	308
867/4 TORX® IPR	322
867/4 TORX® KK	308
867/4 Z TORX®	310
867/4 Z TORX® 50 mm SB	310
867/4 Z TORX® 89 mm SB	310
867/9 C TORX®	314
867/11 TORX®	312
867/12 TORX®	312
867/15 TORX®	313
867/16 TORX®	313
867/21 TORX®	314
867/22 TORX®	315
867/4 Z TORX® B0	317
867/9 C TORX PLUS®	320
867/21 TORX PLUS®	320
867/22 TORX PLUS®	321
867/1 Z IP TORX PLUS®	318
867/4 Z IP TORX PLUS®	319
868/1 BTZ	336
868/1 IMP DC	336
868/1 IMP DC SB	336
868/1 V	337
868/1 Z	337
868/4	339
868/4 BTZ	338
868/4 IMP DC	338
868/4 IMP DC SB	338
868/4 V	339
869/4	351
869/4 M	352
869/4 M SB	352
869/4 M Set A SB	354
870/1	376
870/2	376
870/4	377
870/4 A	376
870/4 SB	376
870/4/7 Set A SB	376
870/7	377
870/14	377
871/1 TORQ-SET® Mplus 25 mm	340
871/1 TORQ-SET® Mplus 32 mm	340
871/1 TORQ-SET® Mplus DC	340

871/2 TORQ-SET® Mplus	342	899/4/1	372
871/4 TORQ-SET® Mplus	341	899/4/1 S	373
871/4 TORQ-SET® Mplus DC	341	899/4/1 SB	372
871/6 TORQ-SET® Mplus	342	899/5/1	373
871/7 TORQ-SET® Mplus	342	899/8/1	373
871/19 TORQ-SET® Mplus	342	899/8/1 K	373
872/9	346	899/14/1	373
872/21	346	899/14/1 SB	373
873/1 Five Lobe	348	8000 A	134
873/4 Five Lobe	349	8000 A SB	134
873/9 Five Lobe	347	8000 B	148
875/1 TRI-WING® 25 mm	343	8000 B SB	148
875/1 TRI-WING® 32 mm	343	8000 C	162
875/4 TRI-WING®	343	8000 C SB	162
875/6 TRI-WING®	343	8001 A SB	186
879/4	353	8002 C Set	178
887/4 RR	367	8003 A	137
887/4 RR SB	367	8003 B	151
888/4/1 K	366	8003 C	167
889/4 R	366	8004 A	139
889/4/1	366	8004 B	153
889/4/1 K	365	8004 C	169
889/4/1 K SB	365	8005	187
890/00/0	371	8006 C	164
890/4/1	371	8100 SA 2	132
890/6/1	371	8100 SA 4	132
890/7/1	371	8100 SA 6	130
890/7/2	371	8100 SA 7	136
891/4/1	374	8100 SA 8	138
891/8/1	374	8100 SA 9	130
893/4/1 K	372	8100 SA 10	136
893/4/1 K SB	372	8100 SA 11	138
894/4/1	369	8100 SA/SC 2	133
894/4/1 K	369	8100 SB 2	147
894/14/1	369	8100 SB 4	148
895/4/1	370	8100 SB 6	146
895/4/1 K	369	8100 SB 7	150
895/4/1 K SB	369	8100 SB 8	152
895/14/1	370	8100 SB 9	146
896/4/1 SB	375	8100 SB 10	150
897/4 Impaktor	360	8100 SB 11	152
897/4 Impaktor SB	360	8100 SC 2	161
897/4 Impaktor R	364	8100 SC 4	162
897/4 Impaktor R SB	364	8100 SC 6	160
898/4	370	8100 SC 7	166
898/9	370	8100 SC 8	168
898/21	370	8100 SC 9	160
899/14/1 SB	373	8100 SC 10	166
899/3/1	372	8100 SC 11	168

Article No. Index

8

8740 C HF	172
8740 C HF 1	173
8767 C HF	172
8767 C HF 1	172
8780 C	178
8781 C	179
8782 C	179
8784 A1	143
8784 B1	156
8784 C2	175
8789 A	141
8789 B	156
8789 C	174
8790 FA	187
8790 HMA	140
8790 HMB	154
8790 HMC	170
8790 HMC HF	170
8790 HMC HF 1	171
8794 A	143
8794 B	156
8794 C	175
8794 LA	141
8794 LB	155
8794 LC	174
8794 SA	141
8794 SB	155
8794 SC	174
8795 A	143
8795 B	156
8795 C	175
8796 LA	140
8796 LB	154
8796 LC	174
8796 SA	140
8796 SB	154
8796 SC	173
8797 C	164

9

91	250
95	250
917 SPH	26
917 SPH SB	26
917 SPHS	26
918 SPZ	27
918 SPZ SB	27
919	216
919	216
920 A	216
930 A	56
930/935/6	56
930/955/6	56
932 A	26
932 A SB	26
932 AS	26
932/6	28
932 S/6	28
932/918/6	29
935 SPH	56
950	211
950 BM	211
950 L	210
950 L/9 SM N	207
950 PKL	209
950 PKL BM	209
950 PKL inch	210
950 PKL/7 SM N	206
950 PKL/7B SM N	206
950 PKL/9 BM N	204
950 PKL/9 BM SB	204
950 PKL/9 SB	204
950 PKL/9 SM N	204
950 PKL/9 SZ N	205
950 PKL/9 SZ N SB	205
950 PKL/13 SZ N	206
950 PKLS	210
950 PKLS/9 SM SB	206
950 PKS	210
950 PKS/9 SM N	208
950 SPKL inch	209
950 SPKL Multicolour	209
950 SPKL/7B SM Multicolour	203
950 SPKL/9 SM N Multicolour	202

Wera Worldwide

Wera Werk

Hermann Werner GmbH & Co. KG
Korzerter Straße 21-25
42349 Wuppertal

 +49 / (0)202 / 40 45 - 322
Fax: +49 / (0)202 / 40 36 34
E-Mail: info@wera.de

Wera International



Wera Tools UK Ltd.

Units 1 & 2, McGregor's Way
Turnoaks Business Park
Chesterfield S40 2WB
 +44 / (0)1246 / 27 77 56
Fax: +44 / (0)1246 / 27 33 35
E-Mail: queries@wera-tools.co.uk



Wera Tools Inc.

4129 Harvester Rd.
Unit "H"
Burlington, ON L7L 5M3
 1-800- 267-5541
E-Mail: info@weratools.com



Wera Iberia

C./Mogoda, 1-5 (Edificio Nodus)
Pno. Ind. Can Salvatella
08210 Barberà del Vallès / Barcelona
 +34 / 93 / 7 29 7-2 40
Fax: +34 / 93 / 7 29 7-2 41
E-Mail: juan.pires@weraspain.com

Germany

04654 Frohburg
Industrievertretung Jens Hiensch
 +49 / (0)157 / 71 90 78 21
E-Mail: jens.hiensch@iv-hiensch.de

09306 Erlau
IMS Lonthoff
 +49 / (0)1525 / 39 81 570
E-Mail: daniellonthoff@gmx.de

10961 Berlin
Werkvertretung Peter Raschke
 +49 / (0)177 / 74 90 484
E-Mail: raschke@wv-raschke.de

21465 Reinbek
Rosendahl & Koppel
 +49 / (0)40 / 23 41 47
E-Mail: rosendahl.koppel.hh@wera.de

26160 Bad Zwischenahn
Ralf Saul
 +49 / (0)4486 / 93 94 78
E-Mail: r.saul@wera.de

42111 Wuppertal
HKL Industrivertretungen GmbH
 +49 / (0)202 / 47 00 01
E-Mail: hkl@wera.de

42349 Wuppertal
Dirk Blasius - Verkaufsleiter NRW
 +49 / (0)202 / 40 45 204
E-Mail: blasius@wera.de

58256 Ennepetal
Ulrich Hesselmann
 +49 / (0)2333 / 83 92 37
E-Mail: ulrich.hesselmann@wera.de

64342 Seeheim-Jugenheim
Layer OHG
 +49 / (0)6257 / 86 96 0
E-Mail: layer@wera.de

77793 Gutach Schwarzwaldbahn
Industrievertretung Markus Haberstroh
 +49 / (0)151 / 57 89 21 37
E-Mail: markus-haberstroh@t-online.de

89269 Vöhringen
Thorsten Schilder
 +49 / (0)7306 / 32 03 96
E-Mail: thorsten.schilder@wera.de

90455 Nürnberg
Dietz OHG
 +49 / (0)9129 / 90 57 50
E-Mail: dietz@wera.de

Europe



AT - 5412 Puch
Alpen-MayKestag GmbH
 +43 / (0)662 / 44 901-0
E-Mail: verkauf@a-mk.com



B - 1600 Sint-Pieters-Leeuw
Beltracy S.A.
 +32 / (0)2 / 54 36 890
E-Mail: info@beltracy.be



BG - 1421 Sofia
Mr. Nikola Ivanov
 +359 / (0)2 / 96 31 900
E-Mail: weraw@mail.bg



CH - 1026 Denges
Metalsa S.A.
 +41 / (0)21 / 80 45 050
E-Mail: info@metalsa.ch



CZ - 180 82 Praha 8
ABQ AGENCY s.r.o.
 +420 / (0)2 / 28 38 41 981
E-Mail: info@abefekt.cz



DK - 2730 Herlev
HJS Værktøj A/S
 +45 / 44 84 40 44
E-Mail: hjs@hjs.dk



EST - 1415 Tallinn
AS Mecro
 +372 / 6 / 20 11 11
E-Mail: mecro@mecro.ee



FIN - 01511 Vantaa
Wihuri Oy Technical Trade
 +358 / (0)20 / 51 02 364
E-Mail: info@wihuri.fi



F - France
Christian Colombel
 +33 / (6)42 70 50 51
E-Mail: colombel@wera.de



GR - 166 72 Vari
Costas J. Kessissoglou
 +30 / 210 / 96 37 521
E-Mail: kessi@hol.gr



H - 1101 Budapest
Fairtool KFT
 +36 / (0)1 / 26 08 025
E-Mail: istvan.kiss@fairtool.hu



I - 20097 San Donato Milanese
Carlo Stechel & Figli srl
 +39 / 02 52 77 71
E-Mail: wera@stechel.it

Wera Worldwide

www.wera.de | www.weratools.com | www.wera-tools.co.uk

Europe



LT-09109 Vilnius
Mr Donatas Zinkus

+370 / 606 / 72077
E-Mail: donatas.zinkus@gmail.com



LT-69320 Klaipėdos raj.
UAB GITANA

+370 / 46 / 410881
E-Mail: info@gitana.lt



N - 0787 Oslo
MORGENSTIERNE verktøy AS

+47 / (0)22 / 49 28 00
E-Mail: tools@morgenstierne.no



NL - Nord
Gerard Kluck

+31 / 65 28 52 622
E-Mail: kluck@wera.de



NL - Süd
Wouter Steijvers

+31 / 65 28 50 162
E-Mail: steijvers@wera.de



PL - 61-306 Poznań
Agentools Sp. z o.o. Sp. k.

+48 / (0)61 / 87 19 000
E-Mail: info@agentools.pl



RO - 061344 București
Edelweiss Grup

+40 / (0)21 / 31 91 313
E-Mail: alexandru.brezeanu@edelweissgrup.ro



RUS - 119454 Moskau
KNIPEX 000

+7 / 495 / 73 73 497
E-Mail: info@knipex.ru



S - 163 53 Spånga
Hansson & Frife AB

+46 / (0)8 / 76 02 510
E-Mail: hansson.frife@esma.se



SRB-11030 Beograd
ELTEC Export-Import d.o.o

+381 / 11 / 3555 - 065
E-Mail: info@eltec.rs

North America (Canada, USA, Mexico)



CA - Burlington, Ontario
Wera Tools Inc.

+1 / 80 02 67 55 41
E-Mail: info@weratools.com



CA - Burlington, Ontario
Wera Tools Inc.

+1 / 80 02 67 55 41
E-Mail: info@weratools.com



MEX - 72180 Puebla
Herramientas, Accesorios y Servicios
de Puebla, S.A. de C.V.

+52 / 1222 / 40 32 973
E-Mail: hacserp@hotmail.com

South America



AR - 1879 Buenos Aires
Quilmes Neumática S.A.

+54 / 11 42 50 03 65 int.21
E-Mail: rudi@quilmesneumatica.com



BR - 09601-000 São Bernardo do Campo-SP
DFG Comércio Importação
Exportação e Representação Ltda

+55 / 11 49 41 21 51
E-Mail: www.dfgferramentas.com.br



CL - Santiago de Chile
Comercial e Industrial Ilesa S.A.

+56 / 23 62 70 00

Australia and Oceania



AU - Australia - 2147 Seven Hills
Cabac

+61 / 13 31 22
E-Mail: sales@cabac.com.au



NZ - 1061 Penrose Auckland
Ecco Pacific

+64 / 80 07 76 969
E-Mail: sales@eccopacific.com.au

Asia



CN - 201206 Shanghai
KNIPEX Tools Co., Ltd.

+86 / 21 58 99 80 10
E-Mail: info@knipex.com.cn



KR - 10463 Gyeonggi-Do
LnJ Korea

+82 / 31 / 96 61 429
E-Mail: LNj2100@ymail.com



IN - 411001 Pune
Nikita Distributors & Extreme
Adventure Sports

+91 / 20 30 50 06 14
E-Mail: raman.jpa@gmail.com



SG - 575625 Singapore
Wing Poh Hardware Pte Ltd

+65 / 62 50 05 23



TW - 114 Taipei City / Taiwan R.O.C
Inhand Corporation

+886 / 2 / 63 19 53 8



TW - 11483 Taipei / Taiwan R.O.C.
Duramet Corporation

+886 / 2 / 26 32 24 88



KR - 08531 Seoul
Protool Co., LTD.

E-Mail: sejin@protool.co.kr

Middle East



IL - Tel-Aviv 61573
Tenegal Agencies Ltd.

+972 / (0)3 / 56 17 411
E-Mail: menahem@tenegal.com

JO, LB, IR, SY, KW, BH, QA, OM, AE, SA, JE
KNIPEX Tools Middle East FZE

+971 / 48 87 85 56
E-Mail: info@knipex-tools.com



IR - 15866-45915 Tehran / Iran
Abzarsara Co.

+98 / 21 88 81 31 20
E-Mail: info@abzarsara.com




Which type of bit is needed for which job?



Impactor-Bits

Impact-Bits are needed when a strong power tool (e.g. 18 volt impact screwdriver) is used. Impact bits were specifically developed to withstand high power tool forces.



TH-Bits

TH-Bits are hard bits with a torsion zone. Torsion bits absorb the damaging peak torque loads in the torsion zone. This prevents premature wear and enhances the service life of the bits.



Stainless Steel-Bits

Wera stainless steel bits are manufactured out of stainless steel so unsightly rust can be avoided. The stainless steel bits from Wera are vacuum ice-hardened and have the hardness and strength needed for screw connections. There are no limitations to the industrial applications they are suitable for.



J-Bits

J stands for Japan. J bits have been optimised to suit Asian PH screws. In particular, they are for use with very small dimensions as set out in the Japanese Camera Standard.



BDC-Bits

BDC-Bits are absolutely premium products. They have a softer BiTorsion zone which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits. The diamond coating lowers the danger of slipping as the minute diamond particles literally “bite” themselves into the screw head. B stands for BiTorsion. DC stands for diamond coated.



ACR®-Bits

ACR® stands for “anti-cam-out ribs”. ACR® bits have ribs at the drive tip that protect against slipping out of the screw head. It is recommended that ACR® bits are matched with ribbed ACR® screws for maximum effect. ACR® is a registered trademark of Phillips Screw Company.



BTH-Bits

BTH-Bits have an additional tempered BiTorsion zone, which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits.



TiN-Bits

TiN stands for titanium-nitride. An extremely hard coating to withstand permanent loads such as during continual screwdriving operations in series manufacturing.



BTZ-Bits

BTZ-Bits have an additional tempered BiTorsion zone, which reduces the hardness of the shaft by about 20 % in comparison to the drive tip. This means that the peak loads that cause bit breakage and premature wear are absorbed in this zone – something which enhances the service life of the bits.



DC-Bits

The diamond coating of the DC bits lowers the danger of slipping as the minute diamond particles literally “bite” themselves into the screw head.



TZ-Bits

TZ-Bits are tough bits with a torsion zone. Torsion bits absorb the damaging peak torque loads in the torsion zone. This prevents premature wear and enhances the service life of the bits.



Bits with reduced shaft diameter

Bits with reduced shaft diameter ensure that screws can be sunk without damaging the surface. This is particularly necessary in drywall construction applications.



A-Bits

A stands for aviation. A bits are particularly hard bits with a sharp-edged profile which e.g. penetrates screw profiles full of paint (such as on fuselage panels) ensuring a dependable transfer of force between the bit and the screw.

Imprint

Subject to technical modifications!

Any reprinting – even only excerpts – shall only be permissible with the prior written consent of the company Wera Werk, Wuppertal.

Edition: EN 2016

Printed in Germany

Trademarks used:

ACR	Phillips Screw Company
ASSY	Adolf Würth GmbH & Co. KG
AW	Adolf Würth GmbH & Co. KG
HIOS	Totsu, Katsuyuki
Microstix	OSG System Products Co. Ltd.
Phillips Recess	Phillips Screw Company
Pozidriv	registered trademark for Phillips Screw Company in Canada, Mexico and in the USA; for Trifast plc in the UK
PZ	registered trademark for Phillips Screw Company in Canada, Mexico and in the USA
PZ1, PZ2, PZ3	registered trademark in the USA for Phillips Screw Company
Robertson	British Robertson S.L.U.
SDS plus	Robert Bosch GmbH
SIT	Adolf Würth GmbH & Co. KG
SPAX	SPAX International GmbH & Co. KG
T-STAR plus	SPAX International GmbH & Co. KG
TORQ-SET	Phillips Screw Company
TORX	Acument Intellectual Properties, LLC, Troy, Mich., US
TORX PLUS	Acument Intellectual Properties, LLC, Troy, Mich., US
TRI-WING	Phillips Screw Company

We reserve the right to modify without prior notification any details stated in this catalogue regarding product features, versions and designs.

No liability for printing errors or mistakes shall be assumed.



Contact us

All regions (except for North America, UK and Republic of Ireland)

Wera Werk · Germany
Korzerter Straße 21–25
D-42349 Wuppertal

Phone: +49 (0) 202 / 40 45-322
Fax: +49 (0) 202 / 40 36 34
E-Mail: info@wera.de

Internet:
www.wera.de

North America

Wera Tools Inc.
4129 Harvester Rd, Unit H
Burlington, Ontario
Canada, L7L 5M3

Phone: 1-800-267-55 41
E-Mail: info@weratools.com

Internet:
www.weratools.com

UK & Republic of Ireland

Wera Tools UK LTD
Units 1 & 2, McGregor's Way
Turnoaks Business Park, Chesterfield
Derbyshire, S40 2WB
Great Britain

Phone: +44 / (0) 12 46 / 27 77 56
E-Mail: queries@wera-tools.co.uk

Internet:
www.wera-tools.co.uk